

AGENDA
REGULAR MEETING OF THE CITY COUNCIL
480 S. ALLISON PARKWAY, 80226
CITY OF LAKEWOOD, COLORADO
HYBRID MEETING
FEBRUARY 26, 2024
7:00 PM

To watch the Council meeting live, please use either one of the following links:
City of Lakewood Website: [Lakewood.org/CouncilVideos](https://lakewood.org/CouncilVideos)

or

Lakewood Speaks: [Lakewoodspeaks.org](https://lakewoodspeaks.org)

The City of Lakewood does not discriminate on the basis of race, age, national origin, color, creed, religion, sex, sexual orientation or disability in the provision of services. People with disabilities needing reasonable accommodation to attend or participate in a City service program, can call 303-987-7080 or TDD 303-987-7057. Please give notice as far in advance as possible so we can accommodate your request.

ITEM 1 – CALL TO ORDER

ITEM 2 – ROLL CALL

ITEM 3 – PLEDGE OF ALLEGIANCE

ITEM 4 – STATEMENT OF CONFLICT OF INTEREST

ITEM 5 – ENDORISING THE 2024-2025 HEAD START GRANT APPLICATION FOR THE PURPOSE OF SUBMITTING A REQUEST TO THE FEDERAL GOVERNMENT FOR GRANT FUNDS AVAILABLE TO PROVIDE HEAD START AND EARLY HEAD START PROGRAMS FOR THE FINAL YEAR OF THE FIVE-YEAR GRANT CYCLE AND NOTIFYING THE OFFICE OF HEAD START THAT THE CITY DOES NOT INTEND TO APPLY FOR GRANT FUNDS WHEN THE NEXT FIVE-YEAR GRANT CYCLE BEGINS

**CONSENT AGENDA
ORDINANCES ON FIRST READING**

ITEM 6 – RESOLUTION 2024-9 – ADOPTING DESIGN STANDARDS AND GUIDELINES FOR STREETSCAPES AND BUILDINGS FOR THE 40WEST ARTLINE

ITEM 7 – RESOLUTION 2024-10 – APPROVING THE 40 WEST ARTLINE

FRAMEWORK PLAN AS AN AMENDMENT TO THE LAKEWOOD
COMPREHENSIVE PLAN

**ITEM 8 – RESOLUTION 2024-11 – APPOINTING A MEMBER TO THE BUDGET
AND AUDIT BOARD**

**ITEM 9 – RESOLUTION 2024-12 – APPOINTING A MEMBER TO THE BOARD OF
APPEALS**

**ITEM 10 – RESOLUTION 2024-13 – REAPPOINTING MEMBERS TO THE
LAKEWOOD ADVISORY COMMISSION**

ITEM 11 – APPROVING MINUTES OF THE CITY COUNCIL MEETINGS

END OF CONSENT AGENDA
**ORDINANCES ON SECOND READING
AND PUBLIC HEARINGS**

**ITEM 12 – ORDINANCE O-2024-5 – AN ORDINANCE AMENDING TITLE 5
CHAPTER 55, SECTIONS 5.55.010 AND 5.55.050 OF THE LAKEWOOD
MUNICIPAL CODE REGARDING INSPECTORS AND MINIMUM HEALTH
AND SAFETY REQUIREMENTS**

ITEM 13 – PUBLIC COMMENT

Anyone who would like to address the Council on any matter other than an agenda item
will be given the opportunity. Speakers should limit their comments to three minutes.

ITEM 14 – GENERAL BUSINESS

A. REQUEST FOR SPECIAL MEETINGS

ITEM 15 – EXECUTIVE REPORT

A. CITY MANAGER

ITEM 16 – MAYOR AND CITY COUNCIL REPORTS

A. COUNCIL MEMBERS BY WARD

B. MAYOR

ITEM 17 – ADJOURNMENT

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 5

To: Mayor and City Council
From: Kathleen Newland, Director of Community Resources
Subject: **HEAD START UPDATE**

SUMMARY STATEMENT: The City of Lakewood currently receives non-competitive grant funding to operate Head Start programs for Lakewood residents.

BACKGROUND INFORMATION: Since 2000, the City of Lakewood has been operating as a direct service provider for Head Start. Lakewood City Council is the governing body for Head Start and must approve grant funding requests and changes to the program operating structure.

As recently as 2020, Lakewood's Head Start program served 90 children in five different facilities for Head Start. Each classroom had 18 children under the guidance of one Lead Teacher, one Co-Teacher, and one Preschool Assistant. Lakewood's Head Start management requested and was approved to reduce the number of Head Start slots from 90 to 80 at the start of the 2020-2021 school year to bring the program into a sustainable, quality operational model that capped the number of students in each classroom at 16, maximized Head Start funding, and ensured compliance with state requirements for supplemental state grant funding through what was then the Colorado Preschool Program (since replaced with the new Universal Preschool Program in 2023).

Head Start slots were also reduced in 2020 due to the difficulty with the recruitment of teaching and support staff as far back as 2018. This problem was exacerbated by the pandemic in 2020 and continues to be a challenge. Since May 2021, the Head Start program has experienced 34 vacancies. Only three Head Start positions have experienced no turnover during that three-year span, and only 9 of the 29 staff members have remained with the program since May 2021.

The shortage of qualified teaching staff has led to the closure of one of the five funded classrooms beginning in August 2022. This closure continues through today, as qualified teaching staff are needed to ensure a safe classroom environment that meets licensing requirements. The high turnover levels, combined with the significant number of ongoing vacancies, has placed added strain on the staff who run the Head Start program, and on all of the supporting department staff in Human Resources, Finance, and Information Technology. Therefore, the Head Start program currently serves 64 children in four classrooms.

BUDGETARY IMPACTS: The Head Start grant totals \$1,555,497. The City must then match those funds with an additional \$361,123 of non-federal match making the minimum total to operate Head Start \$1,916,620. The cost to provide Head Start exceeds that amount each year and the City covers the additional costs with general fund contributions.

STAFF RECOMMENDATIONS: City staff are making the following recommendations:

- Head Start staff should submit the grant request for funding the 2024-2025 school year; AND
- The City should notify the Office of Head Start of the City's intent to complete the current five-year grant and then no longer apply for Head Start grant funds when the new grant cycle begins on July 1,

2025 to allow the Office of Head Start the longest possible lead time to solicit replacement providers and the longest possible lead time for possible replacement providers to plan to take over the Lakewood service area effective June 30, 2025.

ALTERNATIVES: The City Council must make a decision about applying for the Head Start funding for the 2024-2025 school year or lose this funding by default.

The City Council could wait to make the final decision about applying for the next five-year grant to serve as the area Head Start provider at a later date, but the longer the City Council waits to make that decision the less time that the federal government has to plan for a replacement provider and the less time that possible replacement providers have to put together plans for taking over the Lakewood service area effective June 30, 2025.

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS: Staff will ensure all activities are carried out by the required deadlines.

ATTACHMENTS: Resolution 2024-14
Funding Guidance Letter - Annual

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

A RESOLUTION

ENDORSING THE 2024-2025 HEAD START GRANT APPLICATION FOR THE PURPOSE OF SUBMITTING A REQUEST TO THE FEDERAL GOVERNMENT FOR GRANT FUNDS AVAILABLE TO PROVIDE HEAD START AND EARLY HEAD START PROGRAMS FOR THE FINAL YEAR OF THE FIVE-YEAR GRANT CYCLE AND NOTIFYING THE OFFICE OF HEAD START THAT THE CITY DOES NOT INTEND TO APPLY FOR GRANT FUNDS WHEN THE NEXT FIVE-YEAR GRANT CYCLE BEGINS

WHEREAS, the City of Lakewood (the “City”) is a provider of the Federal Head Start program to qualifying Lakewood children;

WHEREAS, Head Start funds are appropriated by the U.S. Administration of Children and Families, Office of Head Start (the “Head Start Office”);

WHEREAS, the City’s Mayor or designee, as the City’s official representative, is authorized to submit documents and assurances as required to administer the programs and expend Head Start funds;

WHEREAS, the Lakewood City Council (the “City Council”) has reviewed the City’s 2024-2025 Grant application (the “Head Start Grant Application”) presented to the appointed Head Start Advisory Committee and the program budget; and

WHEREAS, the City Council hereby finds and determines that endorsing the City’s 2024-2025 Head Start Grant Application is in the best interest of the residents of the City.

WHEREAS, the City Council hereby finds and determines that opening the Lakewood service area to other organizations interested in providing Head Start in Lakewood is in the best interests of the residents of the City beginning in July, 2025.

NOW, THEREFORE, BE IT RESOLVED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. The City Council hereby endorses the City’s 2024-2025 Head Start Grant Application in the amount of One Million Five Hundred Fifty-Five Thousand Four Hundred Ninety-seven Dollars (\$1,555,497.00).

SECTION 2. The 2024-2025 grant year represents the final year the City of Lakewood will serve as a direct provider of Head Start and Early Head Start and the Mayor is hereby directed to provide appropriate notice to the grant provider of this decision of the City Council..

SECTION 3. This Resolution shall become effective immediately upon adoption.

INTRODUCED, READ AND ADOPTED by a vote of ____ for and ____ against at a hybrid regular meeting of the City Council on February 26, 2024, at 7 o'clock p.m.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

APPROVED AS TO FORM:

Alison McKenney Brown, City Attorney



ADMINISTRATION FOR
CHILDREN & FAMILIES

Office of Head Start | 330 C St., SW, 4th Floor, Washington DC 20201 | eclkc.ohs.acf.hhs.gov

December 11, 2023

Grant No. 08CH011641

Dear Head Start Grant Recipient:

An application for funding for the upcoming budget period must be submitted by April 1, 2024.

The following table reflects the annual funding and enrollment levels available to apply for:

Funding Type	Head Start	Early Head Start
Program Operations	\$1,306,252	\$232,054
Training and Technical Assistance	\$12,999	\$4,192
Total Funding		\$1,555,497

Program	Head Start	Early Head Start
Federal Funded Enrollment	80	20

Period of Funding: 07/01/2024 - 06/30/2025

Application Submission Requirements

The application must be prepared and submitted in accordance with the *Head Start Grant Application Instructions with Guidance, Version 3 (Application Instructions)* for a continuation application. It must be submitted on behalf of the Authorizing Official registered in the HSES.

Incomplete applications will not be processed.

Application Instructions are available on the home page of HSES. Please review the instructions carefully prior to preparing the application. Submission guidance can be found in the "Resources" section of the HSES.

Please contact Roshelle Jones, Head Start Program Specialist, at 303-844-1143 or roshelle.jones@acf.hhs.gov or Marilyn Carlino, Grants Management Specialist, at 303-844-1247 or marilyn.carlino@acf.hhs.gov with questions regarding the *Application Instructions*.

For assistance submitting the application in HSES, contact help@hsesinfo.org or 1-866-771-4737.

Funding is contingent upon the availability of federal funds and satisfactory performance under the terms and conditions of the Head Start grant in the current budget period.

Program Improvement (One-Time) Requests

Grant recipients encountering program improvement needs that cannot be supported by the agency budgets or other resources are invited to apply for one-time funding. This funding must be applied for separately through the appropriate supplemental amendment type in HSES. Program Improvement requests generally include but not limited to facility projects (construction, purchase, or major renovations requiring 1303 applications or minor repairs and enhancements). Program improvement requests are prioritized and funded based on funding availability, and may require additional time before a final decision. For questions regarding program improvement needs and requests, please contact the regional office.

Thank you for your cooperation and timely submission of the grant application.

Sincerely,

/Cheryl Lutz/

Cheryl Lutz
Regional Program Manager
Office of Head Start

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 6

To: Mayor and City Council
From: Travis Parker, Planning Director
Subject: **40WEST ARTLINE DESIGN STANDARDS AND GUIDELINES**

SUMMARY STATEMENT: The Planning Department respectfully requests City Council adopt Design Standards and Guidelines for Streetscapes and Buildings for the 40West ArtLine (the ‘Design Standards and Guidelines,’ or the ‘DSG’). City staff and the consultant, Livable Cities Studio, developed the DSG as part of the 40West ArtLine Framework Plan, which included a robust public and stakeholder engagement process, as well as consultation with and review by Lakewood’s Design Review Commission (the ‘DRC,’ or the ‘Commission’).

Article 2.58.010.A of the Lakewood Municipal Code established the DRC and states that the Commission shall review proposed design criteria and any changes to existing design criteria and make recommendations to the City Council regarding such changes. The Commission has reviewed proposed design criteria for the 40West ArtLine, and at its January 9, 2024, meeting, voted to recommend that City Council adopt such criteria. The City Council conducted a study session on the DSG on February 5, and agreed to consider adoption at its February 26 meeting. Once adopted by City Council, the DSG will go into immediate effect for new development subject to the Major Site Plan (MSP) review process for parcels with frontage on the ArtLine. If adopted, these would be Lakewood’s first city-administered DSG, although both Belmar and Denver West have DSG that are not administered by the City.

BACKGROUND INFORMATION: These DSG facilitate minimum required design standards and suggested design guidelines to ensure the ArtLine vision is realized as public and private investment occurs along the route. The overall goal of the ArtLine DSG is to promote consistent streetscape design and placemaking along the ArtLine route. The DSG will help ensure that new development and redevelopment along the route has a cohesive design and streetscape to help ArtLine users safely and easily navigate the 4+ mile long ArtLine route. The DSG also provides assurance to developers along the ArtLine about expectations for design treatments, and hold all new developments to an expectation that projects are contributing to implementing the overall ArtLine vision.

The Design Standards and Guidelines are neither a zoning text nor map amendment, do not change the underlying zoning, and do not modify zoning regulations related to land use, density, dimensional standards, parking, or signage. The DSG specifies a process for review of Major Site Plans (MSPs) by the DRC in accordance with design intent statements, standards, and guidelines contained therein. They apply only to new development fronting streets or public ways or easements along the 40West ArtLine corridor that are subject to the Major Site Plan review process, and specifically do not apply to single unit or two-unit structures. Their applicability is further limited to the streetscapes adjacent to such developments, and, for some streets, to the first or ground floor of such developments. They are intended to encourage pedestrian-friendly design, allow flexibility and creativity in the design process, to retain the eclectic nature of the area, and to avoid uniform-mandated design outcomes.

The DSG are structured with a hierarchy of intent statements, required design standards, and recommended

design guidelines. Major topic areas are streetscape, which apply to all streets, and which includes landscaping, furnishings, lighting, and the treatment of the Green ArtLine. For most streets there are also design guidelines for the ground floor of buildings, including transparency or windows, building materials, and articulation, for public art, and for adaptive reuse of existing buildings. For Lamar St. and Colfax Avenue only, these design standards for the ground floor of buildings and for public art are required. On Lamar Street only, there are additional provisions relating to vehicle access, service areas, and utilities.

Design Review Commission Action

The DRC began meeting in June 2022 to provide guidance and review the development of the DSG, and met every other month subsequently. The DRC met on October 10, 2023 to review the draft DSG and provide comments, and on December 12 to consider the revised draft DSG and provide comments. Mr. Bill Marino also attended the December 12 DRC meeting and subsequently provided written comments. At the January 9, 2024, meeting of the DRC, the Commission moved to recommend to City Council adoption of the Design Standards and Guidelines.

Consistency with Adopted Plans

Adoption of the DSG is consistent with recommendations in the Comprehensive Plan and other adopted plans, including the 40 West Arts District Urban Design and Mobility Concepts Plan, the West Colfax Vision 2040 Action Plan, and the ArtLine Framework Plan as outlined below.

- Consistency with the Comprehensive Plan

Adoption of the DSG is consistent with recommendations in the urban design section in Chapter 3 of the Comprehensive Plan (adopted 2015), which contains a section on urban design and states:

“Making the commercial and mixed-use corridors inviting and pleasant for people is an important step in the urban design evolution of the city. The urban elements of these corridors should always be designed to encourage pedestrian activity and interaction. The design of the streetscape, including lighting, signage, street trees, and landscaping, should be considered with any public improvements or private development taking place along these corridors (p. 3-16).”

“Continue to improve the appearance of the major commercial and mixed-use corridors within the city by requiring higher quality private landscaping, improving public landscaping... (p. 3-16).”

The DSG will help implement this part of the Comprehensive Plan because they contain provisions for streetscape and landscaping, and are intended in part to encourage pedestrian activity.

The Plan also includes Goal I-GA3: Transition the Lamar Street West Rail Station Area into a dynamic community that creates place, connects community, and celebrates history in accordance with the growth area land use map and transit-oriented development principles. Action steps that implement this goal include:

- c. Identify tools to encourage preservation and revitalization of existing buildings where feasible to support the eclectic feel of the station area, and
- d. ...encourage the utilization of brick on building facades... (p. 5-25)

The DSG will help implement this Comprehensive Plan goal and related action steps because they include intent statements and guidelines to encourage adaptive reuse of existing buildings, and also contain design standards for the use of brick and masonry on the ground floor of building facades on Lamar Street.

- Consistency with the 40 West Arts District Urban Design and Mobility Concepts Plan

Adoption of the DSG is consistent with concepts in the 2012 40 West Arts District Urban Design and

Mobility Concepts Plan as explained below.

Plan concept 3.1 recommends prioritized streetscape improvements along streets, including Pierce, Harlan, Lamar, West Colfax, and West 14th Avenue (p. 10). The streetscape concept for Lamar Street also encourages pedestrian-friendly areas with active storefronts, shops, restaurants, and café areas (p.11).

The DSG align with these concepts because they include standards and guidelines for streetscape improvements along these streets, and because one of the intent statements for Lamar Street is to create an active and pedestrian-oriented public realm as well as a design standard to require a building amenity zone that can be used for outdoor seating for retail uses and similar purposes.

Plan concept 3.4 recommends an overall lighting strategy for key streets and West Colfax Avenue to promote pedestrian safety and reinforce the character of the Arts District (p. 10). Pedestrian lighting is recommended to increase safety and define the character of the streetscape. The DSG aligns with this concept because they include design standards for pedestrian site lighting along West Colfax Ave.

- Consistency with the West Colfax Vision 2040 Action Plan

Adoption of the DSG is consistent with key goals and action steps in the 2015 West Colfax Vision 2040 Action Plan as explained below.

Goal P-1 is to increase human-scale design and walkability along the corridor through physical design.

Action Step P-1d is to: Identify design themes and elements that contribute positively to the identity and character of the corridor, and Action Step P-1e is to: Develop design guidelines and design review standards. The DSG will help implement these goals and action steps because they include intent statements, standards, and guidelines for streetscapes that are intended to foster walkability as well as human-scaled design specifications and details for street furnishings.

Goal P-2 is to revitalize existing buildings, and Action Step P-2c is to: Articulate design guidelines that are based on identifying appropriate architectural themes that reinforce and retain the character of the corridor. The DSG will help implement this goal and action steps because they include intent statements and guidelines to encourage adaptive reuse of existing buildings and contain standards and guidelines pertaining to building materials and articulation of the ground floor.

- Consistency with the ArtLine Framework Plan

The Art Line Framework Plan includes an implementation section which references the DSG as a companion document to provide guidance around public realm and private development improvements along the ArtLine, with the goal of creating a creative, artistic, enlivening, economically healthy and thriving community-oriented district (p. 76). On December 9, the Planning Commission adopted the ArtLine Framework Plan, and at its February 26, 2024, meeting, Council approved said Plan as an Amendment to the Comprehensive Plan.

BUDGETARY IMPACTS: None

STAFF RECOMMENDATIONS: That City Council adopt the proposed Design Standards and Guidelines for Streetscapes and Buildings for the 40West ArtLine.

ALTERNATIVES:

1) Adopt the DSG with changes,

- 2) Do not adopt the Design Standards and Guidelines, or,
- 3) Remand the DSG to the Design Review Commission for further consideration.

PUBLIC OUTREACH: Community and stakeholder engagement for the ArtLine Framework Plan and the DSG began in early 2023. An interactive project website was developed: www.lakewoodtogether.org/40westartline, which included a bilingual online survey. Bilingual flyers, posters, and postcards were distributed at ArtLine businesses. Three community events were held at locations on the ArtLine in summer 2023, and there were two community open houses following WCCA meetings: the one on September 20 included an explanatory board and staff to answer questions about the DSG. Two postcard mailings were sent to all property owners on the ArtLine in summer and fall of 2023.

The project team also solicited input directly from project stakeholders, including contacting known major property owners and developers in the area to participate in focus groups. Two developer's focus group meetings were held on March 20 and October 3, 2023. Additional meetings and discussions were held with Riverpoint Partners, a major developer in the area. The project team received extensive comments from these stakeholders and integrated them in the revisions of DSG.

The public comment period on the draft DSG was held during the month of October 2023. Comments were solicited from the aforementioned developer's focus group, as well as the project team, which includes City Departments and non-profit partners such as WCCA and 40W Arts. The public comment period on the draft DSG was advertised on the project website, the DRC website, and by email blasts including the Lakewood Friday Report. The DRC also held a meeting during the public comment period on October 10 and their comments were integrated into the revised draft. Public comments received were generally supportive of the DSG, and specific comments were addressed and/or integrated into the revised draft of the DSG.

NEXT STEPS: The DSG will go into effect immediately following Council approval.

ATTACHMENTS: Resolution 2024-9
40W Design Standards and Guidelines

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

2024-9

A RESOLUTION

ADOPTING DESIGN STANDARDS AND GUIDELINES FOR STREETSCAPES AND BUILDINGS FOR THE 40WEST ARTLINE

WHEREAS, the City of Lakewood Planning Department (the “City”) has completed Design Standards and Guidelines for Streetscapes and Buildings for the 40West ArtLine (the “Design Standards and Guidelines”); and

WHEREAS, The City has worked with the firm Livable Cities Studio to draft said Design Standards and Guidelines in conjunction with the development of the 40West ArtLine Framework Plan; and

WHEREAS, on December 9, 2023 the Planning Commission adopted the 40West ArtLine Framework Plan, which recommends adoption of Design Standards and Guidelines; and

WHEREAS, on February 26, 2024, the City Council adopted said ArtLine Framework Plan as an amendment to the Lakewood Comprehensive Plan; and

WHEREAS, Article 2.58.010.A of the Lakewood Municipal Code established the Design Review Commission (the ‘Commission’) and also states that the Commission shall review proposed design criteria and any changes to existing design criteria and make recommendations to that City Council regarding such changes;

WHEREAS, the Commission has reviewed proposed design review criteria for the 40West ArtLine, in the form of said Design Standards and Guidelines, and at its January 9, 2024 meeting voted to recommend adoption of such criteria by the City Council; and

WHEREAS, development of the Design Standards and Guidelines included extensive public and stakeholder engagement efforts, and a public comment period on the draft Design Standards and Guidelines was held during the month of October 2023; and

WHEREAS, the Design Standards and Guidelines are consistent with and will help implement the Comprehensive Plan and other adopted City plans; and

WHEREAS, the City Council has conducted a public hearing on the Design Standards and Guidelines, with proper notice; and

WHEREAS, the City Council has considered the public testimony received, the action of the Design Review Commission, and the staff report and recommendation; and

WHEREAS, The City requires a resolution from City Council to adopt the Design Standards and Guidelines; and

WHEREAS, the City Council hereby finds and determines that adopting the Design Standards and Guidelines is in the best interests of the City.

NOW, THEREFORE, BE IT RESOLVED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. The Design Standards and Guidelines for Streetscapes and Buildings for the 40West ArtLine as presented to the City Council and dated February 26, 2024, are hereby approved.

SECTION 2. The Mayor and City Clerk are hereby authorized and directed to execute and attest, respectively, their signatures on this Resolution and the Design Standards and Guidelines as evidence of the approval and adoption of the same on behalf of the City Council.

SECTION 3. This Resolution shall become legally effective immediately following final passage.

INTRODUCED, READ, AND ADOPTED by a vote of ____ for and ____ against at a hybrid regular meeting of the Lakewood City Council on February 26, 2024, at 7 o'clock p.m. at the Lakewood Civic Center, 480 S. Allison Parkway, Lakewood, Colorado.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

Approved as to form:

Alison McKenney Brown, City Attorney



40 West ArtLine

DESIGN STANDARDS & GUIDELINES

For Streetscapes and Buildings

January 2024 Draft

Prepared by Livable Cities Studio



Lakewood
Full of Possibilities

Table of Contents

- 4 Introduction**
 - 5 40 West ArtLine Vision
 - 5 Purpose of Design Standards and Guidelines
- 6 Administration of the DSG**
 - 6 Review Authority of the 40 West ArtLine Design Standards & Guidelines
 - 6 Applicability
 - 8 Composition of the Design Review Committee (DRC)
 - 8 Relationship to the Lakewood Zoning Ordinance
 - 8 Organization of the Design Standards and Guidelines
 - 10 Design Review and Approval Process
- 14 Chapter 1: General Standards & Guidelines**
 - 15 Overall Public Art, Placemaking, and Creative Enhancement
 - 18 Overall Streetscape Standards
 - 22 Street Furnishings and Lighting
 - 24 Overall ArtLine Marking Standards
 - 26 Adaptive Reuse

28 Chapter 2: Streets

29 Lamar Street

- 30 Streetscape
- 32 Ground Floor Building Design*
- 36 Vehicle Access
- 37 Service Areas & Utilities

38 West Colfax Avenue

- 39 Streetscape
- 40 Ground Floor Building Design*

46 Harlan, Kendall, and Reed Streets

- 47 Streetscape
- 48 Ground Floor Building Design*

52 Pierce Street

- 53 Streetscape
- 54 Ground Floor Building Design*

58 Lakewood Place

- 59 Streetscape
- 60 Ground Floor Building Design*

64 W Line Bike Path (Lamar St. to Depew St.)

- 65 Streetscape
- 66 Ground Floor Building Design*

68 West 14th and 16th Avenues, and the corner of Teller Street

- 69 Streetscape
- 70 Ground Floor Building Design*

74 West 17th Avenue

- 75 Streetscape
- 76 Ground Floor Building Design*

The background of the slide is a solid dark teal color. Overlaid on this is a large, light teal semi-circle that is centered horizontally and its bottom edge is near the bottom of the slide. Within the area of the semi-circle, there is a faint, light teal grid pattern consisting of both horizontal and vertical lines.

Introduction

40 West ArtLine Vision

The vision for the ArtLine is deeply rooted in the voices of the people living in the community and offers a source of inspiration and focal point for the community. The ArtLine will provide a public space and placemaking experience to socialize, celebrate public art and innovation, showcase local history, improve public health by encouraging walking and biking, support local and creative businesses, and connect communities.

The ArtLine is a 4-mile outdoor public art experience in the heart of the state-certified 40 West Arts Creative District. This award-winning Lakewood amenity connects city parks, transit, schools, shopping, residents, and neighborhoods. From its early beginnings as a proposed arts loop in the 40 West Arts District Urban Design and Mobility Concepts Plan to the recognized cultural amenity it is today, the ArtLine has evolved as an ongoing manifestation of the community's spirit and a public realm and placemaking amenity that harnesses the cultural and creative energy of Lakewood and the neighborhoods it connects.

Purpose of Design Standards and Guidelines

To establish a cohesive vision and guide public realm and private development improvements along the 40 West ArtLine, the following set of Design Standards and Guidelines (DSG) have been developed and address streetscape components, ground floor activation, durability and articulation. The purpose of the standards and guidelines outlined within this document is to provide clear and consistent design direction with the goal of fostering a creative, artistic, diverse, enlivening, economically healthy and thriving community-oriented district. Additionally, the 40 West ArtLine DSG are designed to be used in tandem with the 40 West ArtLine Framework Plan, West Colfax Vision 2040 Action Plan, City of Lakewood Zoning Code and adopted Rules and Regulations to align with citywide goals identified in the Lakewood Comprehensive Plan and other adopted plans to achieve the community's vision.



Administration of the DSG


Review Authority of the 40 West ArtLine Design Standards & Guidelines

Ordinance O-2019-21 establishes the Design Review Commission (DRC) to review projects according to these DSG.

Applicability

These DSG shall apply to review of all Major Site Plans on parcels of land with a frontage adjacent to the ArtLine Route as shown in the adopted ArtLine Framework Plan and mapped in the exhibit below. Each application is subject to design review by the DRC. Per zoning, single-family and two-family structures are not subject to the DSG. The DSG was developed in conjunction with the 40 West ArtLine: A Framework for Moving Forward document, which included public outreach with the community and property owners. A detailed summary of the outreach process can be found in the supplemental 40 West ArtLine Existing Resources and Community Input Summary document.

40 West ArtLine Map: Recommended Route

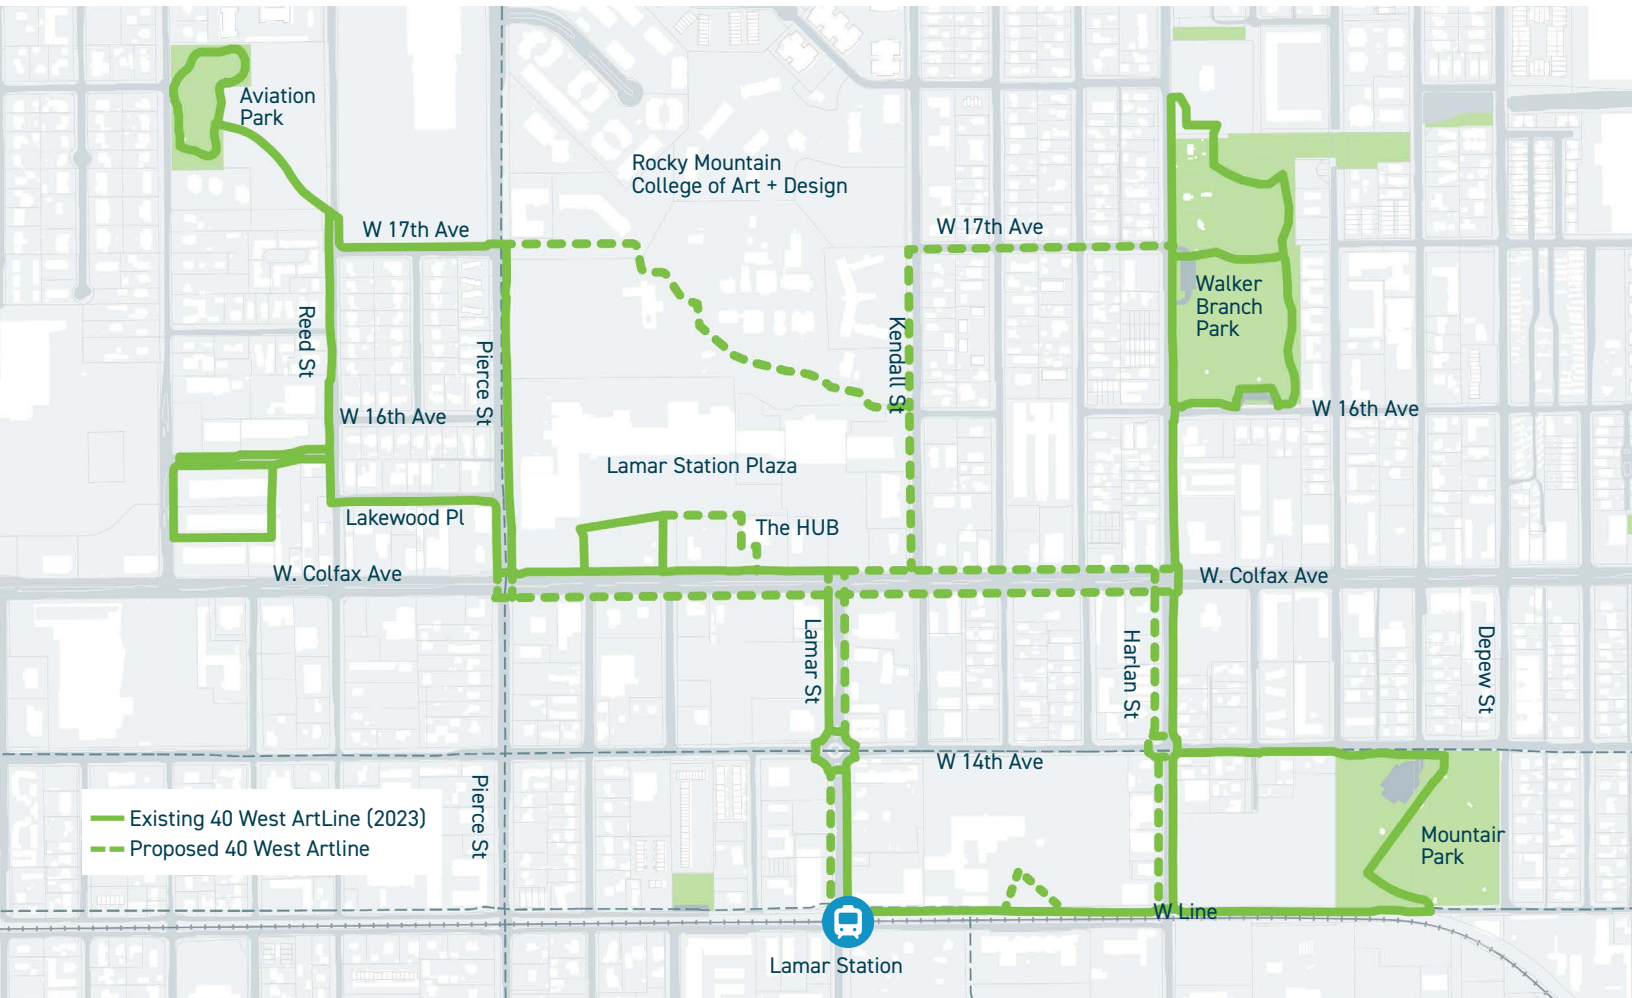

The chart below describes where Public Realm and Private Realm DSG apply along the ArtLine.

Street/Location	Public Realm Publicly-owned streets, pathways, right of ways, publicly accessible open spaces, etc.	Private Realm Privately-owned areas, more limited in its accessibility to the public
Lamar St. - both sides W. Colfax Ave. - both sides	Standards & Guidelines	Standards & Guidelines
Harlan St. from W. 13th Ave to W. Colfax Ave - both sides Harlan St. from W. Colfax Ave to W. 16th Ave. - east side only Kendall St. - west side only Reed St. - west side only Pierce St. from W. Colfax Ave. to Lakewood Place - both sides Pierce St. from Lakewood Place to W. 17th Ave - east side only Lakewood Place - north side only W Line Bike Path W. 14th Ave. - south side only W. 16th Ave. from Reed St. to Teller St. - both sides W. 17th Ave. from Pierce St. to Reed St. - north side only	Standards & Guidelines	Guidelines only
Residential-zoned streets W. 17th Ave. from Harlan St. to Kendall St. - south side only	Standards & Guidelines	None
Parks, private property (eg. RMCAD, Lamar Station Plaza parking lot)	Standards for green line only	None

Composition of the Design Review Committee (DRC)

The composition of the DRC shall be as stated in Chapter 2.58 of the Lakewood Municipal Code (LMC.)

Relationship to the Lakewood Zoning Ordinance

The Lakewood Zoning Ordinance (Title 17 of the Lakewood Municipal Code) governs land use and development throughout the City of Lakewood. These DSG are adopted per the rule-making authority provided in §17.1.7.5. Adherence to the design standards in this manual is also specified by §17.6.1.3 for residential development, and by §17.7.1.3 for institutional, mixed-use, commercial, and light industrial development.

The Zoning Ordinance promotes the public health, safety and welfare of the City's residents and employees and facilitates the growth and expansion of the City. The code applies standards to provide the basic building form, parking, signage, and land use requirements for all neighborhoods within the City. Ordinance O-2019-21 establishes the Design Review Commission to review projects according to these DSG.

Organization of the Design Standards and Guidelines

The Design Standards and Guidelines are organized into broad subject areas which address crucial design topics, and subtopics where applicable. Each design topic is broken down into three key design criteria – Intent Statements (the 'what'), Standards (the 'shall') and Guidelines (the 'should') – each with varying levels of implementation requirements. In addition, each topic includes accompanying precedent graphics and illustrations to further showcase the various means to meet design criteria.

The guidelines have been organized by geographic area and street due to the unique nature of the 40 West ArtLine located in multiple neighborhood contexts, each with a different character and land uses. The street-based approach emphasizes the public realm while adapting any standards or guidelines for adjacent properties or uses to the existing conditions, character, zoning, and uses of each area and street.

The DSG consists of both minimum standards and suggested guidelines to achieve consistent neighborhood character, promote flexibility and creativity, encourage high-quality design, and align with the community vision. The components of the DSG are described below.

Intent Statements

Intent Statements clearly establish the primary design goal or functional objective for the topic, based on the vision for the 40 West ArtLine (see ArtLine Vision on page 5). In circumstances where the appropriateness or applicability of a Standard or Guideline is in question, the Intent Statements will provide additional direction. Innovation is encouraged and carefully understanding the Intent is critical for meeting the spirit of this document while bringing forward new design concepts.

Design Standards

Design Standards (Standards) are objective criteria that provide a specific set of directions for a particular topic, based on the related Intent Statement. Standards denote issues that are critical to achieve the Intent. Standards use the term “shall” to indicate that compliance is required.

Design Guidelines

Design Guidelines (Guidelines) provide further considerations promoting the goals defined by the Intent Statements. They are more flexible and harder to quantify than Standards. Guidelines use the term “should” or “may” to denote that they are pertinent to achieving the stated Intent but allow consideration for site and project conditions. Achieving the Design Guidelines may help to identify alternative approaches to achieving the Standards.

Should there be a request for a waiver or variance of the Standard, the Guidelines shall be strongly considered during the review process. In such a case, it must be demonstrated that the alternative meets one or more of the following criteria:

- » An alternative better achieves the Intent Statement.
- » The Intent will not be achieved by application of the Standard in this circumstance.
- » The Intent of other Standards or Guidelines will be improved by not applying this Design Standard.
- » Extraordinary or exceptional site factors make application of the Standard impractical.

Design Review and Approval Process

Requirement for Approval of Development Plans

Approval of the DRC for any improvements shall be required at each design phase of the development, as defined below, prior to submission of plans and specifications to the City of Lakewood and/or other approving entities (Xcel Energy, water service provider, etc.), and prior to development or redevelopment of any parcel of property covered by the DSG.

The process, review, and approval of any development by the DRC pursuant to these DSG are separate and independent from any review process required by the City of Lakewood. Approval of the DRC does not constitute the development's compliance with the City of Lakewood Zoning Ordinance or building code regulations.

The applicant shall comply with all City regulations, and where these Design Standards are more stringent, these Design Standards shall govern.

Attendance of Applicant During DRC Review Meeting

Applicants are encouraged to attend relevant DRC meetings. The DRC may request that the applicant attend review meetings as necessary to permit the DRC to evaluate the proposed Improvements.

Submission of Plans and Specifications

Prior to commencement of any work to accomplish any proposed Improvements, the applicant shall submit to the DRC all plans and specifications necessary to demonstrate conformance of the proposed Improvements with the DSG. The DRC shall reasonably request the applicant show, at a minimum, the nature, kind, shape, floor area, length, height, width, color, materials, and location of the proposed development. Sufficient information is required at each stage of the review process to fully evaluate the proposed Improvements on all relevant issues. Therefore, the DRC may require additional plans and specifications to further describe the physical properties of the proposed Improvements prior to approval or disapproval of the Improvements. Upon request, the applicant shall receive from the DRC a written acknowledgment that the plans and specifications submitted are complete and the date of such acknowledgment. Review materials shall be submitted to the DRC a minimum of five (5) days prior to the scheduled meeting. The DRC may postpone review of any materials submitted until all required materials have been received. A three-step review process is required for the DRC review and determination relative to all proposed Improvements:

Step 1: Concept Design.

Step 2: Detailed Design.

Step 3: Final Design.

The DRC plan review process is intended to work alongside Lakewood's Major Site Plan review and approval phases as indicated in the exhibit on p. 13. Applicants are encouraged to submit the same information and package required by the City's Major Site Plan review and approval to make the process more streamlined and efficient, in addition to the specific requirements described for each step described herein. One (1) digital copy of all required plans and specifications shall be submitted at each stage through applicable online submission methods as directed by the City of Lakewood.

Step 1: Concept Design

The Concept Design review will be concerned with overall compliance standards such as site layout and access, ground floor frontages, streetscape and public realm design. To align the DRC review process and information with Lakewood's Site Development Review process, applicants are encouraged to use the same format and scale of plan sheets and exhibits, in addition to any additional sheets with specific graphics and information pertinent to the DSG. The following list identifies the minimally acceptable design information required to initiate the Concept Design Review:

1. One digital copy of all sheets and information provided as a part of the City's Pre-Planning Application
2. Illustrative Conceptual/Illustrative Site Plan at a scale not smaller than one (1) inch = thirty (30) feet, and any additional exhibits showing the following:
 - 2.a. Property boundary.
 - 2.b. Ground-floor building program indicating uses and areas.
 - 2.c. Building footprint location and critical dimensions, including dimensions and/or summary of compliance with requirements set forth within the DSG.
 - 2.d. Locations and type of proposed public art or creative enhancements contributing to the 40 West ArtLine experience.
 - 2.e. Location of any community-oriented or creative uses within the building such as community gathering spaces/rooms, live/work artist spaces, spaces for non-profits, or spaces for local resident businesses.
 - 1.a. Location of access drives and curb cuts.
 - 1.b. Proposed vehicular and pedestrian street lights.
 - 1.c. Site parking or structured parking garage location with garage door location identified and access routes.
 - 1.d. Conceptual landscape design, especially streetscape, public realm design and the relationship between the building frontage and the adjacent street. Landscape information to include basic layout of trees, shrub areas, hardscape areas but not final species or material specifications.
 - 1.e. Proposed location of the 40 West ArtLine and marking method
 - 1.f. Approximate finished floor elevation(s).
 - 1.g. Service areas or access points for trash, recycling, and/or compost.
 - 1.h. Written narrative or notes describing the conceptual drainage approach.
 - 1.i. List of proposed building materials.
1. Conceptual building elevations and building heights denoted.
2. Building sections and/or 3D models as required to fully describe the massing.

Step 2: Detailed Design

The Detailed Design submittal will need to address overall compliance with design standards such as building form and placement, details, building materials, colors and finishes, architectural character, and roof lines. The following list identifies minimally acceptable design information required to initiate the Detailed Design review:

1. One digital copy of all sheets and information provided as a part of the applicant's submittal to the City of Lakewood for the Formal Major Site Plan Application #2.
2. Updated Conceptual/Illustrative Site Plan at a scale not smaller than one (1) inch = thirty (30) feet, and any additional exhibits showing further development of all items listed under Concept Design.
3. Additional exhibits, as required, showing the following:
 - 3.a. Grading and drainage plan.
 - 3.b. Detailed building elevations.
 - 3.c. Landscape plan with plant species, hardscape material identified, street furnishings and product information.
 - 3.d. Architectural facade and building treatments.
 - 3.e. Building materials schedule (a sample board may be requested at the time of the meeting for the Final Design phase).
 - 3.f. Site Lighting plans, including location, type and wattage of all exterior features, and photometric plans/study.
 - 3.g. Location of any utility boxes or service access areas, or underground utilities impacting the design of the streetscape and public realm.
 - 3.h. Locations and type of proposed public art or creative enhancements contributing to the 40 West ArtLine experience.


Step 3: Final Design

Final Design documents for the proposed development shall be completed in sufficient detail to fully explain the intent of all sitework, landscape, and architectural design, including all materials and finishes. The following list identifies minimally acceptable design information required to initiate the Final Design review:

1. One digital copy of all sheets and information provided as a part of the applicant's submittal to the City of Lakewood for the Formal Site Plan Application #3 or #4.
2. Any additional exhibits showing further development of all items listed under Detailed Design and if not already included in the Formal Site Plan Application package listed above, including:
 - 2.a. Final Site Plan, including all items required in the Concept Site Plan.
 - 2.b. Final grading and drainage plan.
 - 2.c. Final building floor plans.
 - 2.d. Final building elevations.
 - 2.e. Architectural details.
 - 2.f. Final landscape plans, including type, size, and location of existing and proposed plant material, paving and hardscape details, furnishings details and specifications, and any other amenities proposed within the streetscape or fronting the building.
 - 2.g. Irrigation plans.
 - 2.h. Final Site Lighting plans, including location, type and wattage of all exterior features, and photometric plans/study.
 - 2.i. Utility plan.
 - 2.j. Specification of building materials, type, and color, including a materials sample board.
 - 2.k. Locations and type of proposed public art or creative enhancements contributing to the 40 West ArtLine experience.

Lakewood Design Review Commission (DRC) and City of Lakewood Site Development Plan Review Process and Recommended Sequence

The following process diagram illustrates the suggested review and process for DRC and Lakewood's Site Development Plan review process. Applicants are encouraged to share their project schedule outlining their overall schedule of submittals and review milestones.

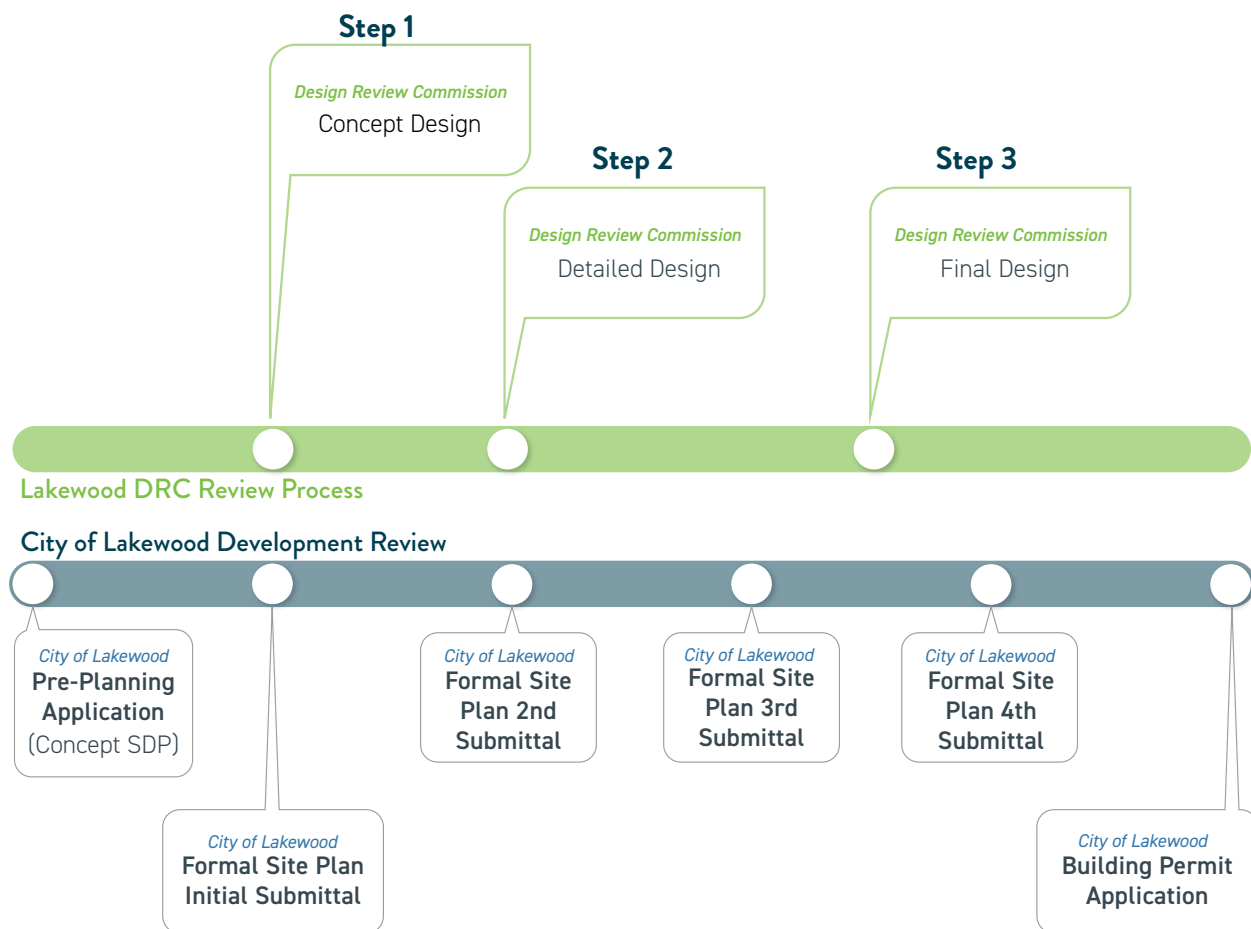

CHAPTER 1:

General Standards & Guidelines

Overall Public Art, Placemaking, and Creative Enhancement

The Public Art, Placemaking, and Creative Enhancement Standards and Guidelines apply to all streets along the ArtLine route and are intended to inform the placement and location of public art and creative enhancements. Revocable License Agreements or other permits may be required for some elements.

Lamar Street and W. Colfax Avenue

Intent

- » To promote the integration of temporary and permanent art, provide visual interest on building facades, and to enhance Lamar Street as an outdoor art corridor and street gallery that contributes to the artistic character of the 40 West ArtLine and Arts District.

Design Standards

- » Each building shall incorporate, at a minimum, one (1) art element that is visible to the public either on private property or in the right-of-way adjacent to the building from the following list of options included below.
 - Wall area or other space allocated for temporary installations and rotating art. (Note: rotating art may require additional building permits)
 - Permanent Mural.
 - Sculpture.
 - Other forms of art determined acceptable by the City of Lakewood, 40 West Arts, and DRC, including but not limited to sound art, light art, etc. (Note: art elements shall be reviewed by a representative of the 40 West Arts District)

Design Guidelines

- » Developers or property owners may partner with one another and collaborate with the 40 West Art District to create a single public art piece. The public art pieces should be in the same general area or block as the proposed development and located on or adjacent to the ArtLine.
- » Collaboration with the 40 West Art District is encouraged.
- » Public art that is horizontally or vertically integrated with the streetscape design and/or adjacent building is encouraged.
- » Note: Art features will need to adhere to any requirements related to clearances, use of right-of-way, maintenance, permitting, etc.

All Other Streets

Intent

- » To promote the use of temporary and permanent art that contributes to the artistic character of the 40 West ArtLine and Arts District.

Design Guidelines

- » Each streetscape improvement should incorporate one (1) or more locations for permanent or temporary public art along the improved area. The location of the public art will be reviewed by the DRC as to how it fits within the 40 West ArtLine area related to pedestrian circulation, character, and placement. Examples of public art locations include, but are not limited to the following:
 - Expanded paving areas outside the sidewalk and Pedestrian Walking Zone where public art can be placed.
 - Concrete pads or pedestals for public art.
 - Locations for ground murals.
 - Note: Features included within the right-of way will need to adhere to any requirements related to clearances, use of right-of-way, maintenance, permitting, etc.
- » The public art should be in the same general area or block as the improvement and located on or adjacent to the ArtLine.
- » When located along the ArtLine marked path, the public art location should integrate the ArtLine marking into the public art location using one of the following methods:
 - Use of the ArtLine “art spot” marking identifying it is a public art location.
 - Wrapping the ArtLine marking around the perimeter of the expanded paving area for public art.
 - Use of special paving or scoring to bring attention to the public art location.
- » Collaboration with the 40 West Art District is encouraged.
- » When located adjacent to a new development or building in mixed use zoning districts, public art that is horizontally or vertically integrated with the streetscape design and or adjacent building or property is encouraged.



Create concrete pads or pedestals for public art

Overall Streetscape Standards

Intent


- » To unify the 40 West ArtLine through the application of consistent design features and quality.
- » To feature the 40 West ArtLine 'Green Line' along the entire route identified in the 40 West ArtLine Framework Plan.
- » To provide an attractive, intuitive, and comfortable pedestrian realm and streetscape environment.
- » To encourage pedestrian activity along the streets that supports activation such as strolling, gathering, viewing of public art, shopping, dining, etc.
- » To support safe and comfortable pedestrian connections to the RTD Lamar Station, RTD bus stops, parks, and adjacent neighborhoods and businesses.
- » To promote overall safety and universal access.
- » To not preclude future changes to street cross-sections between the curb that further the ArtLine vision.

Design Standards

- » General Streetscape
 - Streetscape areas shall meet standards within these DSG and other applicable standards that apply to public or private streets.
 - Vehicular and pedestrian lighting fixtures on public streets shall be selected to prevent glare and light trespass onto adjacent property and surrounding neighborhoods and meet City of Lakewood and Xcel standards when necessary.
 - Streetscapes shall include street furniture, pedestrian lighting, and bicycle racks, for each street as described in Chapter 2 of this document.
 - The Pedestrian, Utility, & Traffic Control Devices (PUTCD) easement located behind the back of sidewalk as required by the City of Lakewood Public Works Department shall be treated as a continuation of the streetscape character and uniform design. Appropriate techniques include:
 - Extending sidewalk hardscape treatments all the way to the building frontage with a paving control joint between the sidewalk and the extended concrete area for maintenance.
 - Hardscape in the form of expanded patios or hardscaped seating areas adjacent to building uses and entries with a paving control joint between the sidewalk and the extended paving area for maintenance.
 - Landscape plantings a minimum 2 feet 6 inches wide and integrated with a larger landscape setback area or adjacent property. The landscape plantings shall reinforce the pattern and character of the streetscape and character of the adjacent property.

» Landscape Design

- A diversity of tree species shall be selected to comply with City of Lakewood standards.
- All street trees shall be at least 3" caliper or greater at time of installation. Street trees shall be deciduous, thornless, fruitless canopy trees of species that can mature to heights of between 30 and 60 feet and with canopies that can mature to at least 25 feet wide. Street trees shall be planted on average 25 feet - 35 feet on center depending on spread and species selected from City of Lakewood's list.
- Planting areas shall be planted with shrubs and groundcover, native grasses, or natural turf grass needing minimal supplemental irrigation. See specific streets for specific standards and guidelines.
- Landscape areas that are greater than three feet in width shall be planted at a minimum with shrubs. Ornamental grasses may also be provided in addition to shrubs.
- Water conserving (xeric) turf grass sod varieties may be provided in between shrub and ornamental grass beds. Synthetic turf is prohibited.
- When shrub and ornamental grasses are used, no less than one (1) shrub per 18 square feet or shrub equivalents may be installed within the landscape area. Shrubs and ornamental grasses are assumed to be an average of three feet diameter at maturity.
- All landscape areas shall be irrigated. Adjacent property owners shall be responsible for the irrigation and maintenance of all streetscapes, trees, and plantings.
- Cut throughs or interruptions in the Tree Lawn area shall have consistent modulation, spacing, and scale along the street, except as necessary to accommodate utilities or if necessary for a placemaking opportunity, exceptional design, or to accommodate unusual site circumstance or utilities.
- Above ground and exposed utility boxes in the public right-of-way shall be located to avoid adverse impacts on the streetscape design and character and be buffered by landscape plantings, covered with a painted or vinyl wrapped mural, or concealed in a way that promotes an attractive streetscape.
- Areas that are less than 2 feet 6 inches in width shall be covered with concrete, pavers, or crusher fines - no rock or wood mulch.

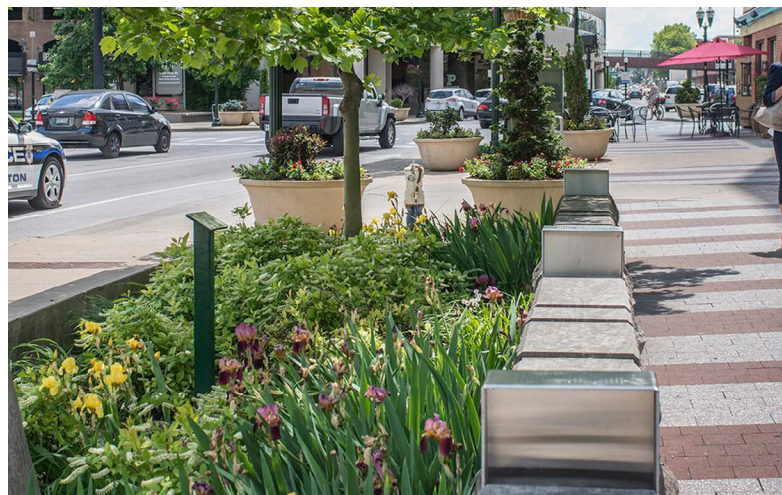

Streetscape ornamental plantings


Design Guidelines

» General Streetscape

- All streets should be visually unified and have a cohesive rhythm through the use of furnishings, trees, plantings, paving, places for art, and lighting.
- Pedestrian lights should be consistently spaced between trees and located to reinforce the pattern and modulation of the streetscape elements.
- Street furnishings and landscape areas should be spaced and organized to create a consistent and identifiable pattern.
- Furnishings should be located efficiently within the Tree Lawn area and align with other elements along the street when located within the right-of-way or located in spaces directly adjacent to the right-of-way when on private property.
- Pedestrian-focused amenities like trash receptacles and bike racks are encouraged in groupings near the intersections and in the Tree Lawn area or easement behind the Sidewalk Zone, provided there is 2-foot minimum clearance to the sidewalk.
- Roadway, curb and gutter, and sidewalk pavement scoring should align to provide a consistent scoring pattern throughout.
- Furnishings, seating, paving patterns, signage, and lighting should be used to reinforce pedestrian and human scale along the streets.
- Green urban stormwater practices should be utilized where possible and integrated into the overall streetscape design and character.
- Utility boxes and utility locations (water, storm, sewer, electric, gas, fiber, etc.) should be coordinated during design and located so they do not interfere with or prevent access or disrupt the overall streetscape.
- Screen walls or privacy fences fronting or visible from the street should incorporate creative fencing, artwork, or creative design elements to enhance the ArtLine experience. Acceptable options include, but are not limited to:
 - Non-standard steel or aluminum fencing such as fences with decorative pickets, panels and patterns, and painted or applied artistic murals on vertical surfaces.
 - Standard steel or aluminum fencing with additional artistic or creative features attached, including artistic metal work, artistic panels or metal sculptural elements.

» Landscape Design

- Minimum landscape planting areas that include trees should be 5 feet wide by 10 feet long, including any use of tree grates or structural planting system. Trees may be acceptable in smaller areas in special circumstances as justified.
- Trees should be located within the tree lawn at equal spacing and in a pattern that reflects the overall streetscape layout unless minor adjustments need to be made for curb cuts or other conditions, and trees should be aligned along each street to create a uniform and visually cohesive tree canopy along the length of the streetscape.
- The use of native and pollinator-friendly species is encouraged. Wildlife-friendly maintenance practices, such as leaving plant debris in place over winter to provide shelter for beneficial insects, are encouraged.

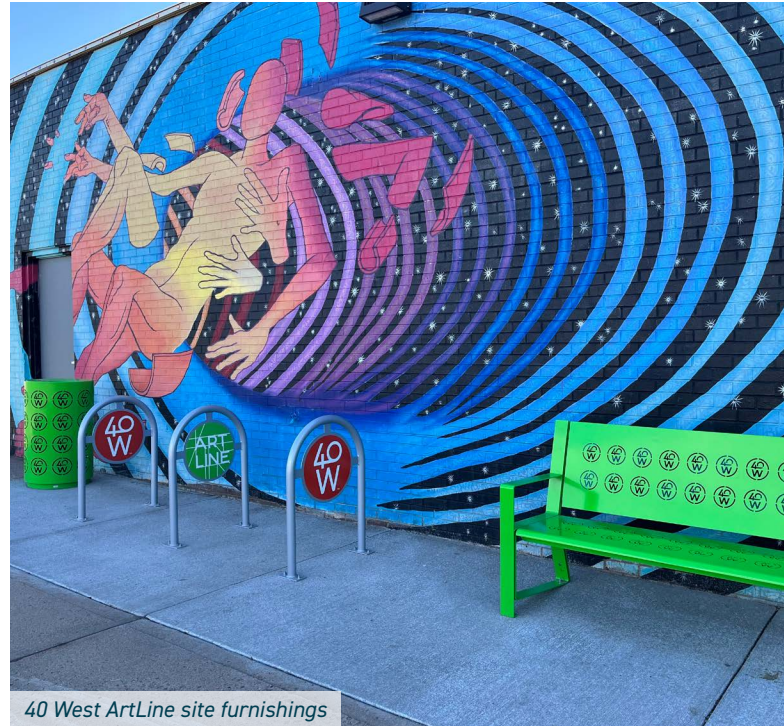

Street Furnishings and Lighting

Intent

- » To establish consistent site furnishings that reflect the creative and artistic nature of the ArtLine.
- » To select a palette of consistent site furnishings to unify, reinforce, brand and create a recognizable character and identity of the ArtLine through repetition of product materials, forms, and colors, while also allowing for unique artist created site furnishings as opportunities become available.
- » To select and locate site furnishings to encourage a comfortable pedestrian experience with seating, lighting, and street furnishings for use by visitors and the community.
- » To provide adequate pedestrian, bike, and micromobility amenities to encourage non-vehicular modes of transportation to and around the ArtLine.

Design Standards

- » Street furnishing elements shall be high quality and include a consistent palette of benches, trash receptacles, bike and scooter racks, pedestrian streetlights, planter pots, bollards, wayfinding and signage features, site railings, tree grates and seat walls to provide pedestrian comfort and convenience as illustrated in this section.
- » Site furnishings shall be chosen from Site Furnishings Palette to create ArtLine unity and identity on streetscapes and within publicly accessible segments or routes. Should any of these site furnishings no longer be manufactured, then ones that are similar in style, color, and scale shall be utilized.
- » Pedestrian site lighting shall be located along all segments of the ArtLine and especially in higher use pedestrian areas to create an environment that in both day and night is unique and pleasing to the eye and encourages pedestrian activity and a sense of safety at night.
- » Unique, artist-created street furnishings shall be an allowed alternative as approved by DRC and 40 West Arts.

Site Furnishings Palette



Bench

Manufacturer: Landscape Forms

Model: Lakeside (custom punch - contact City of Lakewood for custom "40W" punch pattern)

Style: Backed or Backless

Color: Parrot Green or Silver Metallic

Finish: Powdercoated Metal

Mounting: Surface Mount and Plumb

Note: Other benches or creative seating alternatives can be proposed if agreed to by the DRC



Trash Receptacle

Manufacturer: Landscape Forms

Model: Lakeside (custom punch - contact City of Lakewood for custom "40W" punch pattern)

Style: Top Open

Color: Parrot Green or Silver Metallic

Finish: Powdercoated Metal

Mounting: Surface Mount and Plumb



Pedestrian Light

Manufacturer: Landscape Forms
 Model: Arne
 Size: 13.75' height (or as determined by lighting designer)
 Orientation: Orient light fixture toward sidewalk
 Color: Silver
 Finish: Powdercoated Metal
 Style:
 Mid-Block - Single, Top-Mounted Luminaire
 Intersections - Double Luminaire

Note: A solar or other lighting alternative in a similar finish and style could be considered if approved by the City, 40 West Arts, and DRC. Banners and brackets shown provided and managed by others.



Bike Rack

Manufacturer: Madrax
 Model: U24 'U' Bike Rack
 Product: U24-SF-Lakewood-40W
 Color: Platinum
 Mounting: Surface Flange Mount
 Description: Custom Bike Rack with green ArtLine logo decal on one side and orange 40W logo decal on the opposite side (Contact City of Lakewood for decal information)

Artist Designed Furnishings

Unique, artist designed furnishings such as bike racks or benches are an allowed alternative to the above-mentioned palette items and are encouraged as long as approved by the DRC and 40 West Arts.

Overall ArtLine Marking Standards

The Green Line

Intent

- » To provide a consistent installation and layout of the 'Green Line' marking the ArtLine route to support wayfinding, navigation, and branding the ArtLine experience.


Design Standards

- » The 'Green Line' marking shall be a minimum of 8" wide, unless otherwise agreed to by the City of Lakewood and 40 West Arts District.
- » The location of the Green Line marking shall be highly visible and positioned in the center of the sidewalk, unless otherwise agreed to by the City of Lakewood and 40 West Arts District, to make it visually prominent as a wayfinding feature.
- » The color of the 'Green Line' shall be as follows:
 - When painted or using Thermoplastic or MMA:
 - Color: Pantone LT GREEN PMS 361C or equivalent agreed to by the City of Lakewood.
 - When using colored concrete:
 - Color: Davis Color: Willow Green - 5376 or equivalent agreed to by the City of Lakewood.

- » The type of the 'Green Line' marking installed along the ArtLine route shall follow the recommendations set forth in the ArtLine Framework Plan unless otherwise agreed to by the City of Lakewood and 40 West Arts District, and consist of one of the following three methods.
 - Temporary Markings:
 - To be used only in unimproved areas or where the existing paving surface prevents the use of Thermoplastic, MMA, or other methods.
 - Method of Installation: Epoxy modified acrylic.
 - Permanent Markings:
 - To be used on all new development or improvement projects, and areas where the application of Thermoplastic, MMA, or colored concrete is feasible.
 - Method of Installation: Thermoplastic, MMA, or colored concrete.
 - Enhanced Markings:
 - To be used selectively on some new development or improvement projects with opportunities to create a unique or special placemaking feature.
 - Method of Installation: Any form of enhanced paving approved by the City of Lakewood and DRC, including but not limited to brick, unit pavers, colored concrete, inset metal strips, Microtop or specialty paving, etc. The ArtLine green color should be incorporated into the design as appropriate.



Colored concrete

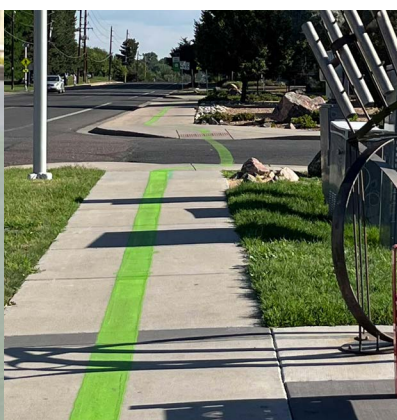

Temporary markings



ArtLine logo

ArtLine Thermo Logo

Intent

- » To make the ArtLine logo more visible and reinforce its overall identity as a creative wayfinding amenity.

Design Guidelines

- » The logo should be the 36" diameter, white and Pantone LT GREEN PMS 361C, prefabricated Thermoplastic logo approved by the City of Lakewood.
- » The logo should be positioned as a highly visible feature in the paved area, sidewalk, and connect to the 'Green Line' ArtLine marking.
- » The ArtLine thermo logo should be installed in key locations along the ArtLine route such as near art locations, important destinations, or at key decision or entry points into the route. Locations should be highly visible to reinforce the ArtLine's identity and be coordinated with the City of Lakewood and the 40 West Arts District to confirm acceptable locations.

ArtLine Bike Lane

Intent

- » To make bike lanes along the ArtLine route visibly consistent with the ArtLine markings by matching colors, graphics, and the ArtLine logo along identified bike routes, including Lamar, Harlan, Pierce, and 14th.

Design Guidelines

- » The ArtLine bike lanes should match the color and application methods described in the 'Green Line' Markings section above to reinforce the ArtLine permanent branding and identity. The bike lane marking design will be submitted and reviewed and approved by Public Works prior to installation and may not result in the continuous application of the green marking in the entire bike lane.

ArtLine Crosswalk Treatments

Intent

- » To make roadway crossing locations for bicyclists and pedestrians along the ArtLine highly visible and safe with well-delineated markings.

Design Guidelines

- » Support efforts to utilize green thermoplastic and/or unique ArtLine pavement markings, as approved by Public Works, to ensure safe and highly visible crossings along the ArtLine route.

Specialty Paving

Specialty paving other than standard cast-in-place concrete may be allowed in special circumstances to promote the creative and artistic character of the ArtLine. Specialty pavers made of durable and lasting materials such as unit pavers, brick or stone should be used to create a unique experience through their arrangement, pattern, texture and color. Paver specifications such as size, color, and material will be determined on a case-by-case basis and reviewed by the DRC as a part of the required submittal and approval process.

Adaptive Reuse

Intent

- » To encourage reuse of existing buildings with solutions that contribute to the unique architectural integrity and respect the historic and eclectic character of the neighborhoods along the ArtLine.
- » To promote building additions that are proportional to the original structure.
- » To encourage new design details that integrate harmoniously with existing high quality architectural details.

Design Guidelines

- » Adaptive reuse should maintain the primary street facing facade and materials to the greatest extent practicable.
 - When necessary, deteriorated exterior portions of buildings should be repaired by reinforcing materials and by replacing original materials with in-kind materials or with compatible substitute materials.
 - Any necessary replacement materials should be compatible in size, scale, materials, and design to the remaining original building.
- » New additions to an existing building should use materials that are compatible with, but clearly differentiated from, basic design elements and materials of the existing building.
- » Existing facade elements that are determined to be essential to the integrity of the existing building should be maintained and preserved.
- » Modifications to the facade of an existing building should not hinder the ability to interpret the design character of the original building.
- » Additional entrances, window openings, and other similar modifications should be constructed in a manner that preserves the character of the building.
- » If an existing building has lost facade details over time compromising the integrity of the facade, future alterations should aim to restore original facade characteristics of the building.
- » Original exterior building material throughout the building should be preserved and maintained to the extent practicable.
- » Existing building signage, especially along West Colfax Avenue, should be preserved, protected, or otherwise integrated into any building that is improved and adaptively used.



Adaptive reuse - The Source building in Denver, CO




Adaptive reuse at Ginger and Baker in Fort Collins

CHAPTER 2:

Streets

Lamar Street

Lamar Street is envisioned as an outdoor gallery street that will be the focal point and main mixed-use neighborhood spine. It will have a unified design character and street-level activation, offering gathering spaces, public art, and lighting to be a community destination and to promote mobility and connectivity between the Lamar Station, HUB at 40 West Arts, the other commercial destinations along West Colfax Avenue and to be a welcoming front door to future adjacent development projects. The DSG apply to both sides of Lamar Street between W.13th and W. Colfax Avenues.

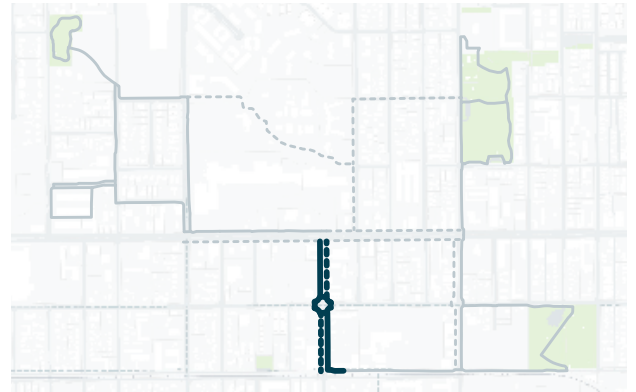

Lamar Street Map




Conceptual illustration of Lamar Street as an activated art corridor. Building rendering represents one possible concept.

Streetscape

Intent

- » To create an active and pedestrian-oriented public realm that reinforces the role of Lamar Street as the primary destination street in the 40 West Arts District.
- » To create a consistent design character along the street that features the 40 West ArtLine, public art, and creative enhancements.
- » To allow flexibility and develop a process for the integration of temporary and permanent art in the right-of-way and on private property.
- » To provide tree canopy, landscape, pedestrian amenities, and a special character environment that draws people to the Lamar Station and commercial areas along West Colfax Avenue and creates a welcoming entrance to adjacent development from Lamar Street.

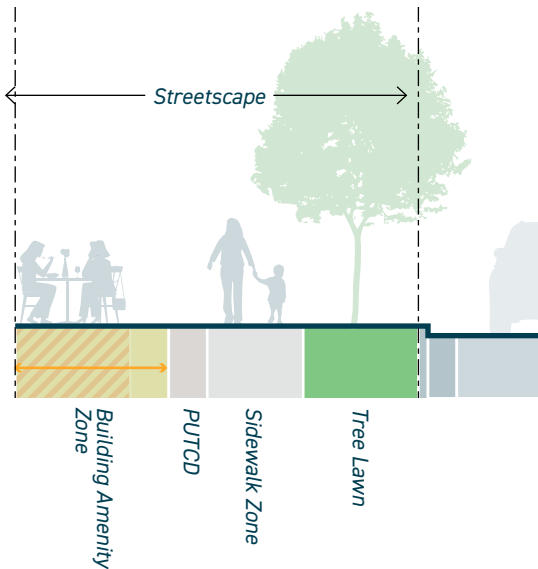

Typical Streetscape Section - See Design Standards for dimensional information

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
2. The 40 West ArtLine 'Green Line' shall be included on both sides of the street and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
3. Lamar Street streetscape behind the curb shall have the following:
 - 3.a. Streetscape area a minimum of sixteen feet (16') and a maximum of twenty-four feet (24') wide including a Tree Lawn, Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 3.b. The Tree Lawn shall be a minimum of six feet (6') wide and shall contain streetscape elements, such as street furnishings, lights, and landscape areas with trees.
 - 3.c. The Sidewalk Zone shall be organized to create a continuous unobstructed area, a minimum of eight feet (8') wide, for ease of travel and maintenance.
 - 3.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2')
 - 3.e. A Building Amenity Zone shall be located behind the PUTCD, a minimum of four feet (2') and a maximum of eight feet (8') wide, to create a transition between the sidewalk, PUTCD and the building or frontage zone. The following standards shall apply based on the building use:
 - 3.e.1. The Building Amenity Zone for commercial or mixed-use buildings shall be a minimum of two feet (2') and a maximum of eight feet (8'). This requirement shall apply to a minimum of 50% of the building fronting the street.
 - 3.e.2. There is no Building Amenity Zone requirement for residential buildings.

1. Hardscape treatments along the streetscape shall include the following:
 - 1.a. Sidewalk Zone
 - 1.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.
 - 1.b. Tree Lawn
 - 1.b.1. Use of regularly spaced brick paving bands ranging from 4' - 6' wide.
 - 1.b.2. Use of regularly spaced sandstone paving band, or alternative approved by the DRC, engraved with words supporting creativity in the 40 West Arts District.
2. Street Furniture and Lighting along the streetscape are encouraged to be co-located in key locations with art or other amenities and shall include the following:
 - 2.a. Furnishings
 - 2.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 100 feet of streetscape length on average.
 - 2.a.2. One (1) 40 West Arts District custom punch trash and recycling bin, as identified in Chapter 1 of this document, for every 250 feet of streetscape length on average.
 - 2.b. Bicycle Racks
 - 2.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.
 - 2.c. Pedestrian Lighting
 - 2.c.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.



Example of seating and paving elements

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along street-facing building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.
- » To support the vision of Lamar Street as a lively destination and vibrant place and not just a pass through or residential street.
- » To incorporate activated pedestrian-oriented ground floor design along the street level facade that go beyond the minimum requirement set in the Lakewood Zoning Ordinance.
- » To incorporate any ground floor residential uses so that they are flexible and can be converted into non-residential uses in the future (i.e. working artist space, live-work space, or community space).

Design Standards

1. Street level frontages with commercial uses shall have a minimum depth of 15 feet unless otherwise defined by zoning regulations.
2. The street level facade shall incorporate elements to relate taller ground floor heights to human scale.
3. Street level facades shall use well-detailed, quality and durable materials that provide texture and depth. (See "Building Materials and Articulation")
4. The street level facade shall be designed to provide human scale through articulation, transparency, and architectural details. Appropriate techniques include:
 - 4.a. Recessed entries.
 - 4.b. Projecting or recessed window bays.
 - 4.c. Changes in street level setback.
 - 4.d. Canopy or overhang at public entries.

Design Guidelines

1. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between sidewalk grade and the finished floor elevation of the ground floor.
2. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, the W Line bike path, or other pedestrian corridors) where Lamar Street intersects other streets. Street level commercial space at corners should wrap the corner onto the intersecting streets for a minimum distance of 15 feet.
3. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 3.a. Standardize structural bay spacing.
 - 3.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
4. Canopies and awnings used to define the street level should be integrated into building design.
 - 4.a. Provide generously sized awnings, metal awning screens and other screens to provide shade for glass windows/doors while preserving transparency.

* Unless otherwise stated, DSG for building design apply only to street level or ground floor.



Example of generously sized awnings providing shade and preserving transparency



Activated building frontage with outdoor dining and vegetation

Transparency

Intent

- » To provide visual interest on building facades and enhance the visual quality of the built environment along street level facade areas.
- » To design buildings so activities are visible from the public realm and vice versa.
- » To encourage well-detailed fenestration.

Design Standards

1. Transparency on street level facade shall be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
2. Street level glazing shall use transparent glass to allow pedestrians to view the activity within the building.
 - 2.a. Glazing shall have a maximum reflection coefficient of approximately 0.15.
 - 2.b. Transparent glazing for wall openings, i.e., doors and windows, shall be used along all street level facades for maximum transparency.
 - 2.c. Required transparency at street facing and street level façade shall not be blocked by signage, displays, advertising graphics, or other screening elements.

1. The maximum length of a wall that does not satisfy the transparency requirement shall be 10 feet in length.
2. Window openings shall be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 2.a. Recessing a window opening a minimum of 2 to 6 inches behind the façade.
 - 2.b. Projecting windows a minimum of 2 to 6 inches beyond the façade.
 - 2.c. Other methods proposed by the applicant and determined to be appropriate by the DRC.

Design Guidelines

1. Transparency at the street level should expand beyond the 2'-10' height requirement in the City of Lakewood Zoning Ordinance.
2. Transparent facades at the street level fronting Lamar Street should align with commercial and retail uses and incorporate an outdoor patio or seating areas when adjacent to food and beverage uses.
3. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors such as the W Line bike path). Where Lamar Street intersects other streets or the W Line bike path, street level commercial space at corners shall wrap the corner onto the intersecting streets.
4. Transparency alternatives such as murals may be considered.



Transparency allowing views into retail shops and building uses

Building Materials & Articulation

Intent

- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To honor the history of Lakewood Brick and the past industrial character of the area, brick should be a primary architectural design element.

Design Standards

1. Architectural precast materials shall include the use of brick, masonry, precast, high quality metal panels/cladding and finishes.
2. EFIS, stucco, and CMU on ground floor street-facing facades are prohibited except as a base material for mural or art.

Design Guidelines

1. Provide additional architectural articulation options that is more detailed at the ground floor, including:
 - 1.a. Expression of the structural system and infill panels through a change in plane of at least 3" on average.
 - 1.b. Articulation of window and doorway surrounds, which may include sills, lintels, pilasters, and mullions, through a change in plane of at least 2" on average.
 - 1.c. A system of horizontal and vertical articulating reveals of 3/8" width by 3/8" depth, minimum.
 - 1.d. A system of art or ornament integral to the building (such as an inset decorative panel or metal framework anchored to embeds in the building façade).
 2. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms.
1. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.
 2. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
 3. Building designers are encouraged to use architectural canopies that are visually integrated into the building architecture.
 4. Building designers are encouraged to provide spaces or setback at the ground floor to provide active outdoor amenities along the street that promote active street life, including:
 - 4.a. Restaurant seating and cafe spaces.
 - 4.b. Areas for public art and creative placemaking.
 - 4.c. Areas for seating and gathering.



Use of high quality buildings materials and articulation

Vehicle Access

Intent


- » To reduce the visual impacts of vehicle access on the streetscape and active building frontages.
- » To minimize conflicts between pedestrians, cyclists, and motor vehicles.
- » To protect sidewalks, amenities, and other pedestrian-oriented areas from vehicular impacts.

Design Standards

1. Vehicle Access Points are discouraged along Lamar Street and will only be permitted if there is no other alternative or if the access point is shared between separate development sites.
2. Vehicle access shall be taken from adjacent streets or other access points originating from streets other than Lamar Street, when available.
3. Any vehicle access points necessary shall be designed to minimize impacts on pedestrians and have minimal impact on the quality of the public realm. Appropriate strategies include:
 - 3.a. Limiting the width of Vehicle Access Points.
 - 3.b. Screening vehicle access areas with landscaping or other streetscape elements
 - 3.c. Consolidating Vehicle Access Points with service access areas or other vehicle access needs.
 - 3.d. Recessing vehicle access areas when they are a part of a building facade or frontage. Required sight and vision triangles must be maintained.

Design Guidelines

1. Where alternative access is not feasible, the number of Lamar Street access points should be limited to one (1) location per property or development.
2. Vehicle Access Points should not be located near a building entry, outdoor gathering area, patio space, or other public realm amenity area.
3. Vehicle Access Points should be located and designed to maintain active street frontage where alternate access is not possible. Appropriate strategies include:
 - 3.a. Locating the Vehicle Access Points so they minimize the impact on ground floor building design and streetscape amenities.
 - 3.b. Locating commercial ground floor building uses adjacent to and in the floors above Vehicle Access Points.

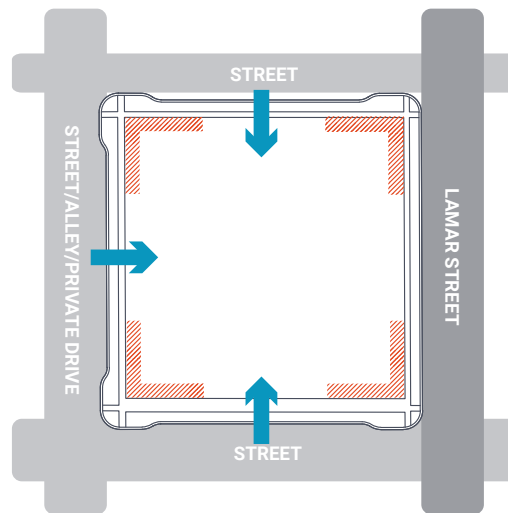

 No curb cuts zone

 Preferred vehicular access

Service Areas & Utilities

Intent


- » To minimize the visibility and impact of service areas and utility lines (water, fiber optic, sanitary, storm, sewer, electric, gas, etc.) to the streetscape.
- » To reduce conflicts between servicing activities, pedestrians, and cyclists.
- » To promote the use of alleys or drives as the primary means of accessing service areas and utilities.
- » To protect the pedestrian-oriented streetscape areas from noise and odor impacts associated with service areas.
- » To protect streetscape amenities, trees, and landscape areas from impacts of underground utilities (water, fiber optic, sanitary, storm, sewer, electric, gas, etc.) and easements.
- » To encourage utility and service areas to be consolidated with other Vehicle Access Points.
- » To encourage applicants to coordinate with utility providers during the design process.

Design Standards

1. Service, utility and loading areas shall not be located adjacent to pedestrian entries.
2. Service and utility areas shall be consolidated when possible.
3. Adequate service area lighting shall be provided to promote safety.
4. Ventilation shafts, grates, and other above-ground mechanical or site servicing equipment, shall be located away from the Public Realm.
5. Public utility boxes located in the ROW shall incorporate murals or other physical art to minimize their visual impact and support the arts district identity.

Design Guidelines


1. Service, utility and loading areas should be located on the alley, or back of building if accessible and no alley exists, or within the building mass, and away from pedestrian areas and amenities such as sidewalks, public art, or seating areas.
2. Utility service lines (water, gas, storm, sewer, etc.) should be located and placed between trees and streetscape amenities to avoid loss of tree canopy or amenities as a result of maintenance, repair, or replacement activities.
3. Wherever feasible dry utilities should be located beneath the sidewalk or PUTCD to avoid the requirement for a separate utility easement on private property along the street.
4. Service areas should be combined with Vehicle Access Points to minimize pedestrian and Public Realm impacts. (Also see Standard 3.3.c on p. 36)

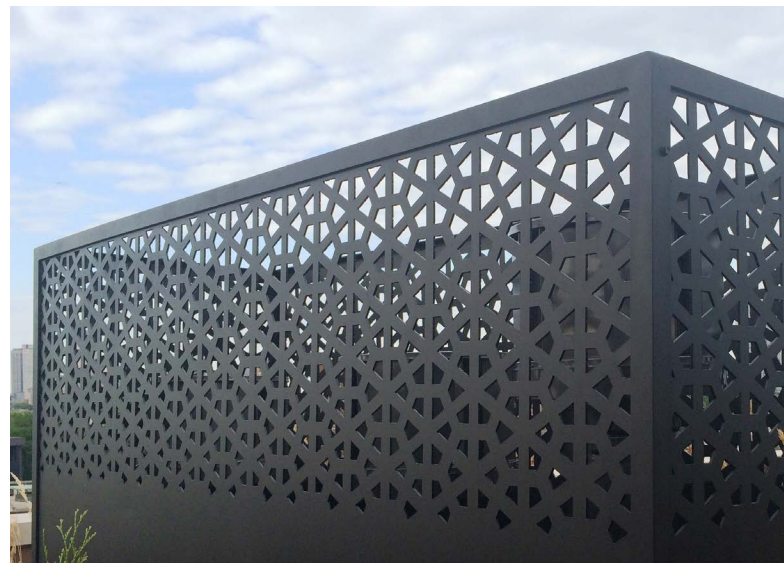

Creative screening hides dumpsters and other unsightly service utilities that are located on private property but still visible from the street

West Colfax Avenue

Historic West Colfax Avenue will be a focal point and main mixed-use commercial segment located at the center of the 40 West Arts District and ArtLine. Seen as a primary commercial spine with a continuous design character with landscape and plantings, locations for public art, sidewalks, safe crossing areas, and pedestrian lighting. The standards and guidelines in this section apply to the section of West Colfax Avenue between Harlan Street and Pierce Street.

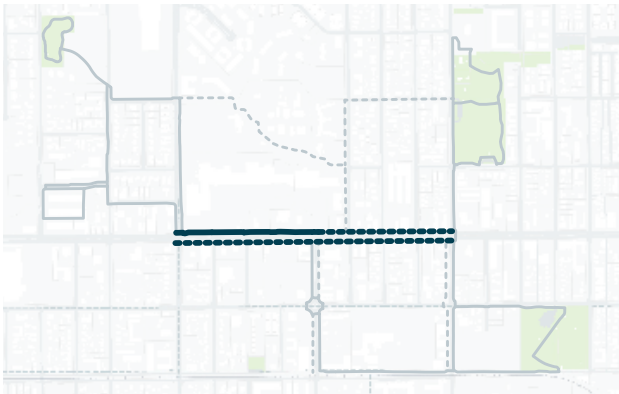

West Colfax Avenue Map


Streetscape

Intent

- » To create a safe, comfortable, and pedestrian-oriented public realm that reinforces the role of W. Colfax Avenue between Pierce and Harlan Streets as a recognizable place in the 40 West Arts District.
- » To create a consistent design character along the street that features the 40 West ArtLine, public art and creative enhancements.
- » To provide landscape, pedestrian amenities, and a special character environment that draws people to the commercial areas along West Colfax Avenue and announces people have arrived in the 40 West Arts District.

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
2. The 40 West ArtLine 'Green Line' shall be included on both sides of the street and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
3. W. Colfax Avenue streetscape behind the curb shall have the following:
 - 3.a. Streetscape area to include a Tree Lawn, Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 3.b. The Tree Lawn shall contain streetscape elements, such as street furnishings, lights, landscape areas with trees.
 - 3.c. The Sidewalk Zone shall be organized to create a continuous unobstructed area for ease of travel and maintenance.
 - 3.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2'), to create a transition between the sidewalk and the building or frontage zone.
4. Hardscape treatments along the streetscape shall include the following:
 - 4.a. Sidewalk Zone
 - 4.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.

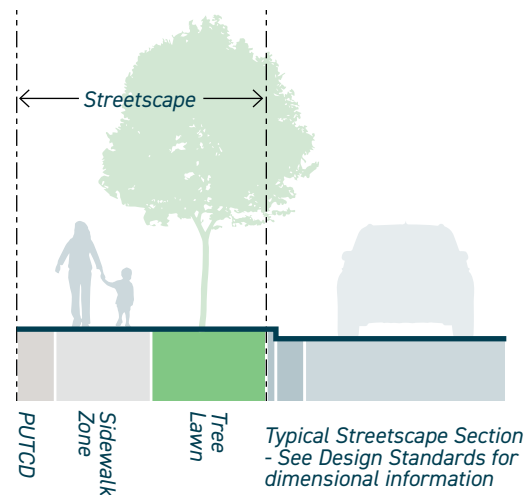

1.a. Tree Lawn

- 1.a.1. Use of consistent landscape and planting to provide a buffer and barrier between the sidewalk and curb.

1. Street Furniture and Lighting along the streetscape shall include the following:

1.a. Furnishings

- 1.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 100 feet of streetscape length on average.
- 1.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 200 feet of streetscape length on average.

1.b. Bicycle Rack

- 1.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.

1.c. Pedestrian Lighting

- 1.c.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.

Design Guidelines

1. Bicycle Racks Location

- 1.a. In order to discourage theft of bicycles, Bicycle Racks should be located in front of commercial uses in clear view of patrons inside.

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along street-facing building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.
- » To incorporate activated pedestrian-oriented ground floor design along the street level facade that go beyond the minimum requirement set in the Lakewood Zoning Ordinance.
- » To incorporate any ground floor residential uses so that they are flexible and can be converted into non-residential uses in the future (i.e. working artist space, live-work space, or community space).

Design Standards

1. Street level frontages with uses that activate the street shall have a minimum depth of 15 feet.
2. The street level facade shall incorporate elements to create substantial floor-to-floor heights to promote visual prominence.
 - 2.a. An approximately and average 16-foot floor-to-floor height is desired for a street level occupied by any use.
3. Street level facades shall use well-detailed, quality and durable materials that provide texture and depth. See the "Building Materials and Articulation" section for more information.
4. The street level facade shall be articulated to promote human scale building frontage through articulation, transparency, and architectural details. Appropriate techniques include:
 - 4.a. Recessed entries.
 - 4.b. Projecting window bays.
 - 4.c. Changes in street level setback.

* Unless otherwise stated, DSG for building design apply only to street level or ground floor.

Design Guidelines

1. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between sidewalk grade and the finished floor elevation of the ground floor.
2. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or other pedestrian corridors) where West Colfax Avenue intersects other streets or connections. Street level commercial space at corners should wrap the corner onto the intersecting streets or connection for a minimum distance of 15 feet.
3. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 3.a. Standardize structural bay spacing.
 - 3.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
4. Canopies and awnings used to define the street level should be integrated into building design.
 - 4.a. Provide generously sized awnings, metal awning screens and other vertical screens to provide shade for glass windows/doors while preserving transparency.
5. Exterior railings, stairs, steps, low walls, or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.



Ground floor designed using generously sized metal awnings

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To design buildings so activities are visible from the public realm and vice versa, with "eyes on the street".
- » To encourage well-detailed facade fenestration.

Design Standards

1. Transparency on street level facade shall be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
2. Street level glazing shall use transparent glass to allow pedestrians to view the activity within the building.
 - 2.a. Glazing shall have a maximum reflection coefficient of approximately 0.15.
 - 2.b. Transparent glazing for wall openings, i.e., doors and windows, shall be used along all street level facades for maximum transparency.
 - 2.c. Required transparency at street facing and street level façade shall not be blocked by signage, displays, advertising graphics, or other screening elements.
3. The maximum length of a wall that does not satisfy the transparency requirement shall be 15 feet in length.
4. Window openings shall be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 4.a. Recessing a window opening a minimum of 2 to 6 inches behind the façade.
 - 4.b. Projecting windows a minimum of 2 to 6 inches beyond the façade.
 - 4.c. Other methods proposed by the applicant and determined to be appropriate by the DRC.

Design Guidelines

1. Exterior railings, stairs, steps, low walls or vertical elements should not significantly block visibility of the facade areas used to meet transparency standards.
2. Transparency at the street level should expand beyond the height requirement in the City of Lakewood Zoning Ordinance, which is 2'-10', to provide a greater facade area with transparency.
3. Transparent facades at the street level should be located to align with commercial and retail uses. When aligned with a retail use, incorporate an outdoor patio, seating area, or amenity space.
4. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors).
5. Transparency alternatives such as murals may be considered.



Transparency on street level facade provides visibility into street level active use

Building Materials & Articulation

Intent

- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character and refined building material choices.
- » To promote the use of building materials on any visible facade that provide visual interest and a sense of human scale without appearing as a patchwork of incongruous colors or materials.
- » To discourage building materials that produce flat or featureless surfaces on any visible façade.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To encourage the use of innovative, high-quality, and sustainable materials.
- » To encourage the use of building materials that are integrated into a cohesive facade design.

Design Standards

1. Architectural materials shall include the use of brick, masonry, precast, high quality metal panels/cladding and finishes.
2. EFIS, stucco, and CMU on ground floor street-facing facades are prohibited except as a base material for mural or art.

Design Guidelines

1. Provide additional architectural articulation options that is more detailed at the ground floor, including:
 - 1.a. Expression of the structural system and infill panels through a change in plane of at least 3" on average.
 - 1.b. Articulation of window and doorway surrounds, which may include sills, lintels, pilasters, and mullions, through a change in plane of at least 2" on average.
 - 1.c. A system of horizontal and vertical articulating reveals of 3/8" width by 3/8" depth, minimum.
 - 1.d. A system of art or ornament integral to the building (such as an inset decorative panel or metal framework anchored to embeds in the building façade).


1. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.
2. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
3. Building facades should include multiple and frequent entries to provide activity and repetition.
4. Buildings should incorporate architectural canopies that are visually integrated into the building architecture.
5. Buildings are encouraged to setback the ground floor to provide active outdoor amenities along the street that promote active street life, including:
 - 5.a. Restaurant seating and cafe spaces.
 - 5.b. Areas for public art and creative placemaking.
 - 5.c. Areas for seating and gathering.



High quality building materials and well articulated facade

Harlan, Kendall, and Reed Streets

Harlan (both sides from W. 13th Ave. to W. Colfax Ave. and east side from W. Colfax Ave. to W. 18th Ave.), Kendall (the west side from W. Colfax Ave. to 17th Ave. when the future RMCAD ArtLine Segment is developed), and Reed Street (the west side from Lakewood Place to Aviation Park) are all important north/south connections along the ArtLine route. The streets serve an important role as primary north-south connections and mixed-use streets bringing people from the commercial core along W. Colfax Avenue to areas north and south, including the Edgewater Civic Center and Public Library, Walker-Branch Park, Mountair Park, Aviation Park, and RMCAD when the future ArtLine Segment is installed.

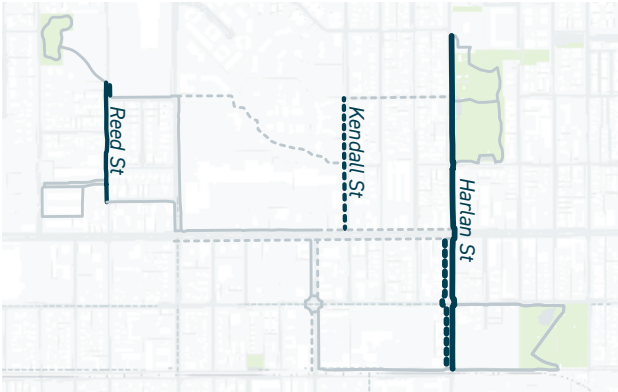

Harlan, Kendall, and Reed Streets Map

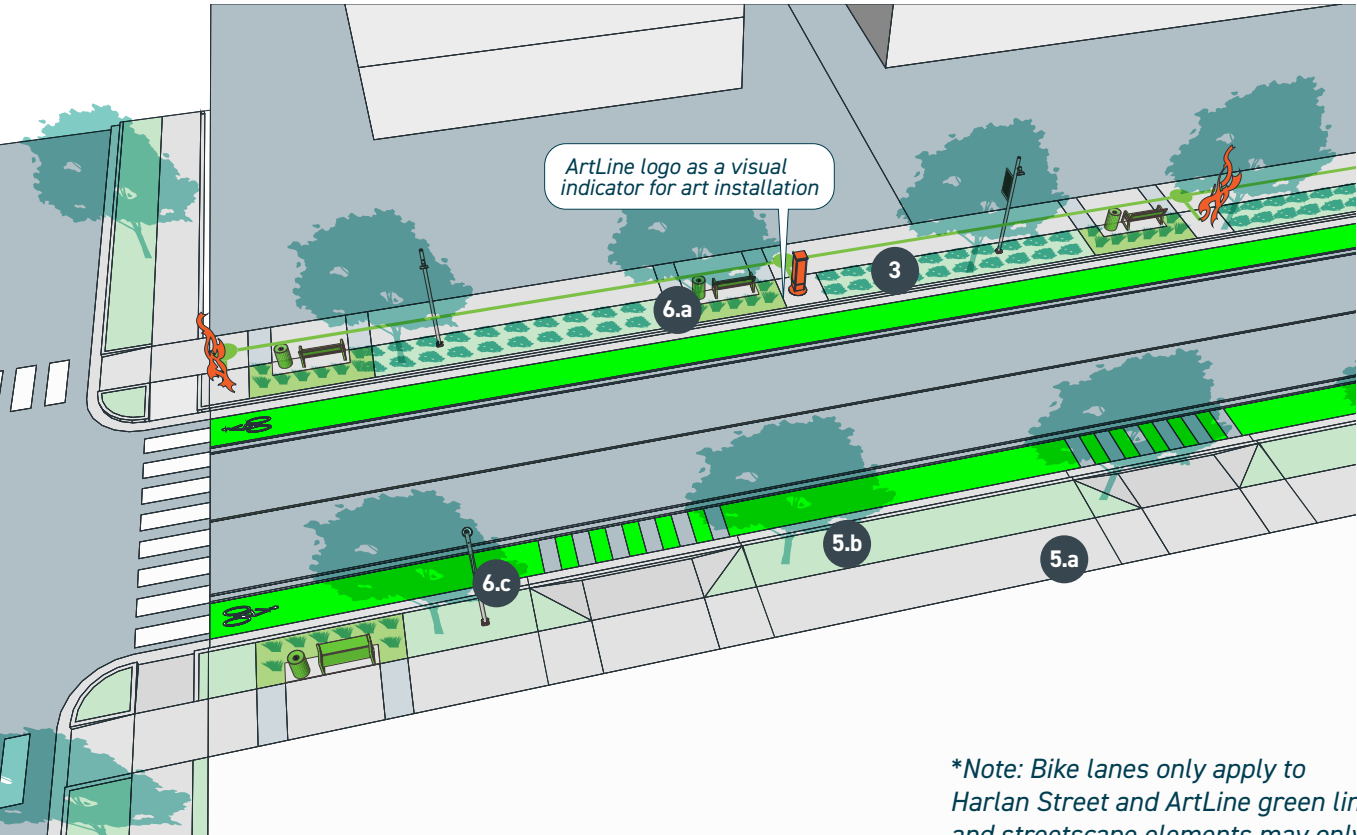


Figure 1. A conceptual illustration of Harlan, Kendall, and Reed Streets

Streetscape Design Standards Number

**Note: Bike lanes only apply to Harlan Street and ArtLine green line and streetscape elements may only be on one side of the street in some areas, as described above.*


Streetscape

Intent

- » To improve the pedestrian and bicycle connections and the ArtLine experience.
- » To provide a cohesive, attractive, and comfortable pedestrian connection with improved sidewalks, sustainable landscape plantings and street trees.
- » To create a consistent design character along the street that features the 40 West ArtLine, public art, green bike lane markings where designated, and creative enhancements.
- » To allow a streetscape design that is flexible and functions with existing development, adaptive reuse, and new development.

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
2. Illustrative perspective sections —Harlan, Kendall, and Reed Streets (Refer to Figure 1) shall be representative of the ArtLine streetscape for all streets included in this section as described on p. 46.
3. The 40 West ArtLine 'Green Line' shall be included on each street and located on the side of the street identified in the ArtLine Marking Recommendations Map in the Framework Plan, and adhere to the Overall ArtLine Marking Standards in Chapter 1 of this document.
4. The streetscape treatment behind the curb shall have the following:
 - 4.a. Streetscape area a minimum of thirteen feet (13') wide including a Tree Lawn, Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 4.b. The Tree Lawn shall be a minimum of six feet (6') and contain streetscape elements, such as street furnishings, lights, landscape areas with trees.
 - 4.c. The Sidewalk Zone shall be a minimum of five feet (5') and organized to create a continuous unobstructed area for ease of travel and maintenance.
 - 4.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2'), to create a transition between the sidewalk and the building or frontage zone.
1. Hardscape treatments along the streetscape shall include the following:
 - 1.a. Sidewalk Zone
 - 1.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.
 - 1.b. Tree Lawn
 - 1.b.1. Use of consistent landscape and planting to provide a buffer and barrier between the sidewalk and curb.
2. Street Furniture and Lighting along the streetscape shall include the following:
 - 2.a. Furnishings
 - 2.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 300 feet of streetscape length on average.
 - 2.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 600 feet of streetscape length on average.
 - 2.b. Bicycle Racks
 - 2.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.
 - 2.c. Pedestrian Lighting
 - 2.c.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.

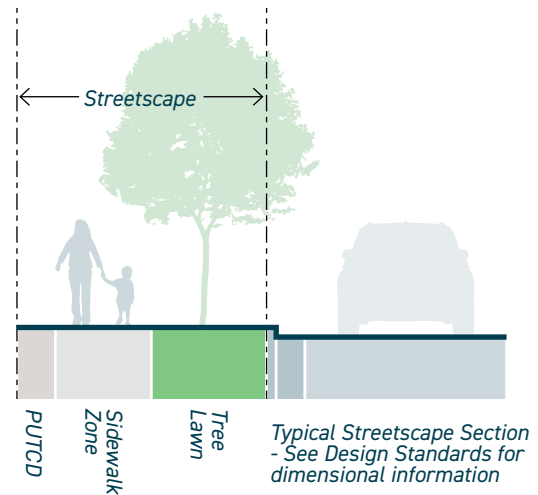

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.
- » To enhance the ArtLine while respecting existing neighborhood character and residential land uses and supporting adaptive re-use.

Design Guidelines

1. Street level facades should use well-detailed, quality and durable materials that provide texture and depth. See the "Building Materials and Articulation" section for more information.
 2. The street level facade should be articulated to promote human scale building frontage through articulation, transparency, and architectural details. Appropriate techniques include, but are not limited to:
 - 2.a. Recessed entries.
 - 2.b. Projecting window bays.
 - 2.c. Changes in street level setback.
 3. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between existing sidewalk grade and the finish floor elevation of the ground floor.
 4. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or other pedestrian corridors) where these streets intersect with other streets or connections. Street level commercial space at corners should wrap the corner onto the intersecting streets or connection for a minimum distance of 15 feet.
1. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 1.a. Standardize structural bay spacing.
 - 1.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
 2. Canopies and awnings used to define the street level should be integrated into building design.
 - 2.a. Provide generously sized awnings, metal awning screens and other vertical screens to provide shade for glass windows/doors while preserving transparency.
 3. Exterior railings, stairs, steps, low walls, or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.

** Unless otherwise stated, DSG for building design apply only to street level or ground floor.*

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To encourage non-residential building activities that are visible from the public realm and vice versa, with "eyes on the street".
- » To encourage well-detailed facade fenestration.

Design Guidelines

1. The maximum length of a wall that does not satisfy the transparency requirement should be 10 feet in length.
 2. Transparency on street level facade should be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
 3. Windows on a street level facade should be transparent glass with a maximum reflectance of approximately 0.15 that allows for pedestrians to view the activity within the building.
 4. Window openings should be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 4.a. Recessing a window opening a minimum of 4 to 6 inches behind the façade.
 - 4.b. Projecting windows a minimum of 4 to 6 inches beyond the façade.
1. Exterior railings, stairs, steps, low walls or vertical elements should not significantly block visibility of the facade areas used to meet transparency standards.
 2. Transparency at the street level should expand beyond the height requirement in the City of Lakewood Zoning Ordinance, which is 2'-10', to provide a greater facade area with transparency.
 3. Transparent facades at the street level should be located to align with commercial and retail uses. When aligned with a retail use, incorporate an outdoor patio, seating area, or amenity space.
 4. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors).
 5. Transparency alternatives such as murals may be considered.

Building Materials & Articulation

Intent

- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character and refined building material choices.
- » To promote the use of building materials on any visible facade that provide visual interest and a sense of human scale without appearing as a patchwork of incongruous colors or materials.
- » To discourage building materials that produce flat or featureless surfaces on any visible façade.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To encourage the use of innovative, high-quality and sustainable materials.
- » To promote building materials that are integrated into a cohesive facade design.


Design Guidelines

1. Provide additional architectural articulation options that is more detailed at the ground floor, including:
 - 1.a. Expression of the structural system and infill panels through a change in plane of at least 3" on average.
 - 1.b. Articulation of window and doorway surrounds, which may include sills, lintels, pilasters, and mullions, through a change in plane of at least 2" on average.
 - 1.c. A system of horizontal and vertical articulating reveals of 3/8" width by 3/8" depth, minimum.
 - 1.d. A system of art or ornament integral to the building (such as an inset decorative panel or metal framework anchored to embeds in the building façade).
2. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.

1. Architectural materials should include the use of brick, masonry, precast, high quality metal panels/ cladding and finishes.
2. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
3. Building facades should include multiple and frequent entries to provide activity and repetition.
4. Building designers are encouraged to use architectural canopies that are visually integrated into the building architecture.
5. Buildings are encouraged to setback the ground floor to provide active outdoor amenities along the street that promote active street life, including:
 - 5.a. Restaurant seating and cafe spaces.
 - 5.b. Areas for public art and creative placemaking.
 - 5.c. Areas for seating and gathering.

Pierce Street

Pierce Street is an important connection bringing ArtLine users from W. Colfax Avenue to the northernmost areas near RMCAD, W. 17th Ave, and Aviation Park. The street serves an important role as a primary north-south street connecting commercial uses along W. Colfax Avenue to residential areas near W. 17th Avenue. The street includes existing streetscape improvements and larger land uses along the east side and unimproved streetscapes on the west side. The ArtLine route is located on the east side from West Colfax to 17th Avenue and the west side from West Colfax to Lakewood Place.

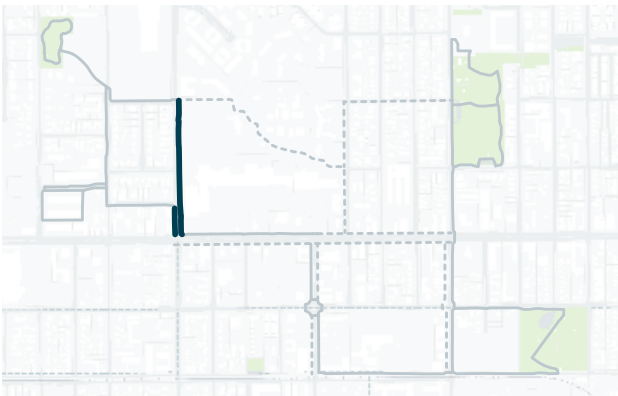

Pierce Street Map

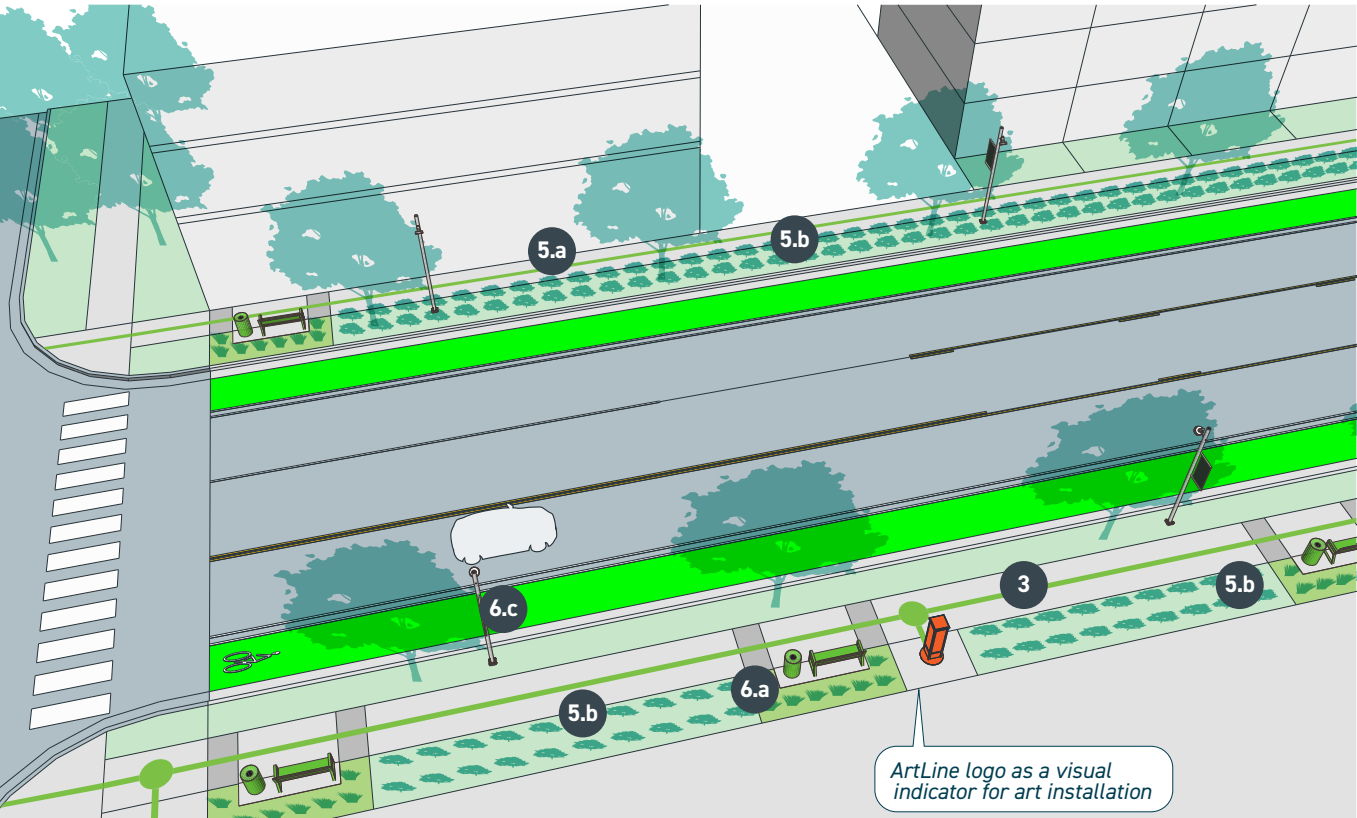


Figure 2. A conceptual illustration of Pierce Street (between W. Colfax and Lakewood Place)

Streetscape Design Standards Number


Streetscape

Intent

- » To improve the pedestrian connections and the ArtLine experience from areas between W. Colfax Avenue and W. 17th Ave.
- » To provide a cohesive, attractive, and comfortable pedestrian connection with improved sidewalks, sustainable landscape plantings and street trees.
- » To create a consistent design character along the street that features the ArtLine, public art, green bike lanes, and creative enhancements.
- » To allow a streetscape design that is flexible and functions with existing development, adaptive reuse, and new development.

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
2. Illustrative perspective sections —Pierce Street (Refer to Figure 2) shall be representative of the segment of the ArtLine streetscape where located on Pierce Street.
3. The 40 West ArtLine 'Green Line' shall be included on the east side of the street from West Colfax to 17th Avenue and the west side from West Colfax to Lakewood Place and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
4. The streetscape treatment behind the curb shall have the following:
 - 4.a. Streetscape area a minimum of thirteen feet (13') wide including a Tree Lawn, Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 4.b. The Tree Lawn shall be a minimum of six feet (6') and contain streetscape elements, such as street furnishings, lights, landscape areas with trees.
 - 4.c. The Sidewalk Zone shall be a minimum of five feet (5') and organized to create a continuous unobstructed area for ease of travel and maintenance.
 - 4.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2'), to create a transition between the sidewalk and the building or frontage zone.
1. Hardscape treatments along the streetscape shall include the following:
 - 1.a. Sidewalk Zone
 - 1.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.
 - 1.b. Tree Lawn
 - 1.b.1. Use of consistent landscape and planting to provide a buffer and barrier between the sidewalk and curb.
2. Street Furniture and Lighting along the streetscape shall include the following:
 - 2.a. Furnishings
 - 2.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 300 feet of streetscape length on average.
 - 2.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 600 feet of streetscape length on average.
 - 2.b. Bicycle Racks
 - 2.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.
 - 2.c. Pedestrian Lighting
 - 2.c.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.

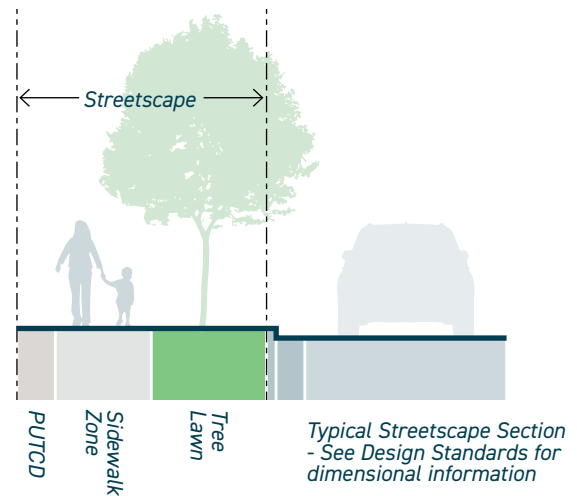

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.
- » To enhance the ArtLine experience while respecting the existing character and important RMCAD and Metro West Housing Solutions land uses.

Design Guidelines

1. Street level facades should use well-detailed, quality, and durable materials that provide texture and depth. See the “Building Materials and Articulation” section for more information.
 2. The street level facade should be articulated to promote human scale building frontage through articulation, transparency, and architectural details. Appropriate techniques include:
 - 2.a. Recessed entries.
 - 2.b. Projecting window bays.
 - 2.c. Changes in street level setback.
 3. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between existing sidewalk grade and the finish floor elevation of the ground floor.
 4. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or other pedestrian corridors) where Pierce Street intersects other streets or connections. Street level commercial space at corners should wrap the corner onto the intersecting streets or connection for a minimum distance of 15 feet.
1. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 1.a. Standardize structural bay spacing.
 - 1.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
 2. Canopies and awnings used to define the street level should be integrated into building design.
 - 2.a. Provide generously sized awnings, metal awning screens and other vertical screens to provide shade for glass windows/doors while preserving transparency.
 3. Exterior railings, stairs, steps, low walls or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.

* Unless otherwise stated, DSG for building design apply only to street level or ground floor.



Activity at the street level through a variety of uses and architectural elements

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To design buildings so activities are visible from the public realm and vice versa, with “eyes on the street”.
- » To encourage well-detailed facade fenestration.

Design Guidelines

1. The maximum length of a wall that does not satisfy the transparency requirement should be 10 feet in length.
2. Transparency on street level facade should be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
3. Windows on a street level facade should be transparent glass with a maximum reflectance of approximately 0.15 that allows for pedestrians to view the activity within the building.
4. Window openings should be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 4.a. Recessing a window opening a minimum of 4 to 6 inches behind the façade.
 - 4.b. Projecting windows a minimum of 4 to 6 inches beyond the façade.
1. Exterior railings, stairs, steps, low walls or vertical elements should not significantly block visibility of the facade areas used to meet transparency standards.
2. Transparency at the street level should expand beyond the height requirement in the City of Lakewood Zoning Ordinance, which is 2'-10', to provide a greater facade area with transparency.
3. Transparent facades at the street level should be located to align with commercial and retail uses. When aligned with retail use, incorporate an outdoor patio, seating area, or amenity space.
4. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors).
5. Transparency alternatives such as murals may be considered.

Building Materials & Articulation

Intent


- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character and refined building material choices.
- » To encourage the use of building materials on any visible facade that provide visual interest and a sense of human scale without appearing as a patchwork of incongruous colors or materials.
- » To discourage building materials that produce flat or featureless surfaces on any visible façade.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To encourage the use of innovative, high-quality and sustainable materials.
- » To promote building materials that are integrated into a cohesive facade design.

Design Guidelines

1. Provide additional architectural articulation options that is more detailed at the ground floor, including:
 - 1.a. Expression of the structural system and infill panels through a change in plane of at least 3" on average.
 - 1.b. Articulation of window and doorway surrounds, which may include sills, lintels, pilasters, and mullions, through a change in plane of at least 2" on average.
 - 1.c. A system of horizontal and vertical articulating reveals of 3/8" width by 3/8" depth, minimum.
 - 1.d. A system of art or ornament integral to the building (such as an inset decorative panel or metal framework anchored to embeds in the building façade).
2. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.
1. Architectural materials should include the use of brick, masonry, precast, high quality metal panels/ cladding and finishes.
2. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
3. Building facades should include multiple and frequent entries to provide activity and repetition.
4. Building designers are encouraged to use architectural canopies that are visually integrated into the building architecture.
5. Buildings are encouraged to setback the ground floor to provide active outdoor amenities along the street that promote active street life, including:
 - 5.a. Restaurant seating and cafe spaces.
 - 5.b. Areas for public art and creative placemaking.
 - 5.c. Areas for seating and gathering.

Lakewood Place

Lakewood Place is a one-block section of the ArtLine located just north of W. Colfax Avenue that provides an east-west connection between Reed and Pierce Streets. The street serves an important role as a unique street and public space serving and connecting numerous commercial buildings, creative businesses, and art galleries. The narrow right-of-way and numerous access driveways make it feel like a functional and service-oriented street currently rather than a traditional street.

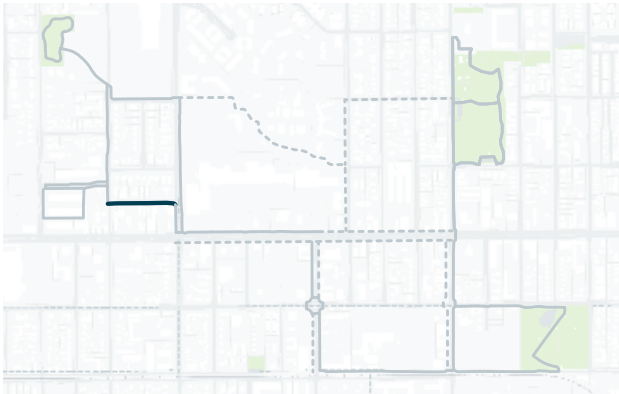

Lakewood Place Map

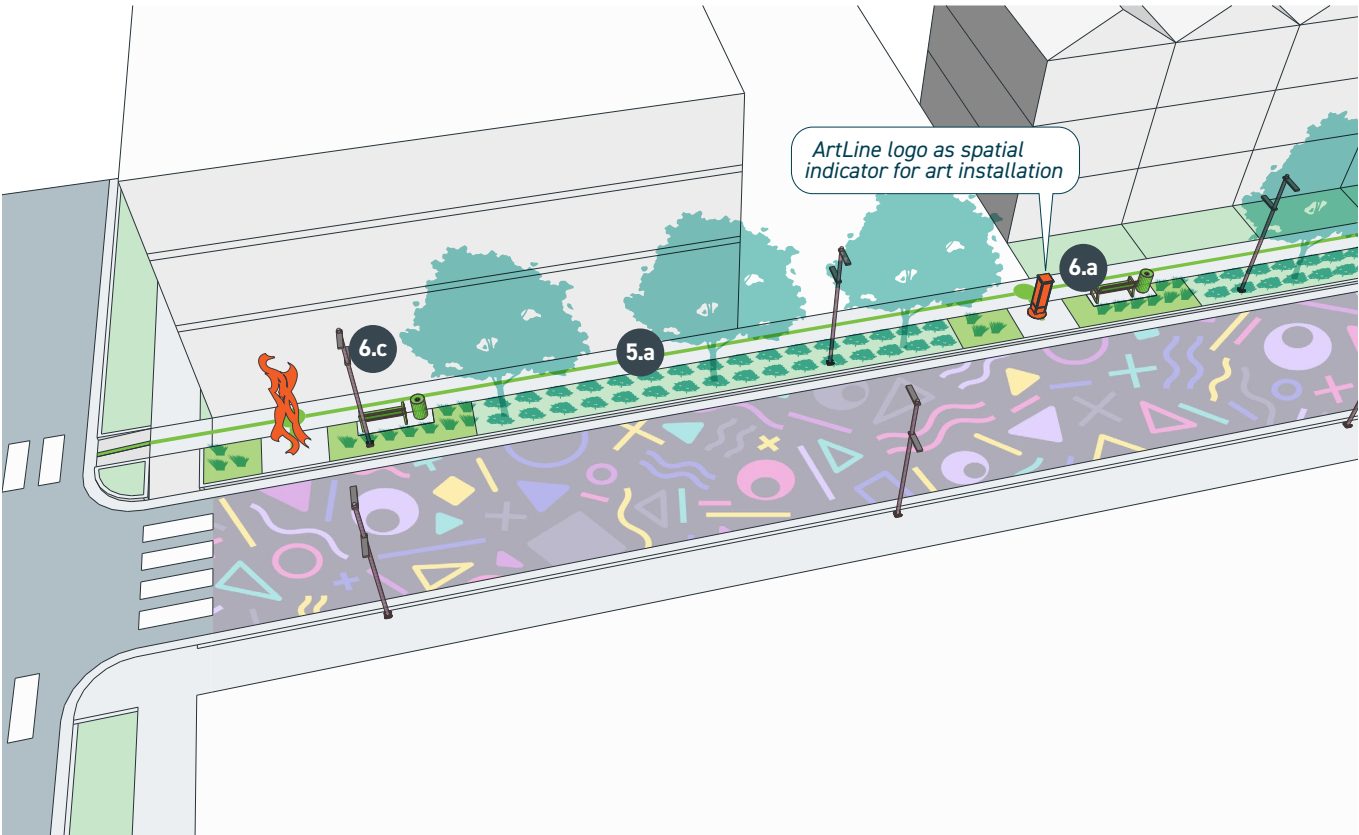


Figure 3. A conceptual illustration of Lakewood Place

Streetscape Design Standards Number


Streetscape

Intent

- » To improve the pedestrian connections and the ArtLine experience from between Reed and Pierce Streets.
- » To create a highly visible, welcoming, safe, and aesthetically pleasing connection for pedestrians and bicyclists between the creative businesses in the Aviation Park segment and Colfax Core segment of the ArtLine.
- » To provide a cohesive, attractive, and comfortable pedestrian connection with improved sidewalks, continuous lighting, and creative murals or other forms of public art.
- » To create a consistent design character along the street that features the ArtLine, public art and creative enhancements.
- » To allow a streetscape design that is flexible and functions with existing development, adaptive reuse and new development.

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
2. Illustrative perspective sections —Lakewood Place (Refer to Figure 3) shall be representative of the segment between Reed and Pierce Streets.
3. The 40 West ArtLine 'Green Line' shall be included on the north side of the street and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
4. The streetscape treatment behind the curb shall have the following:
 - 4.a. Overall streetscape area, including a Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 4.b. The Tree Lawn shall contain streetscape elements such as street furnishings, lights, landscape areas with trees.
 - 4.c. The Sidewalk Zone shall be a minimum of six feet (6') and organized to create a continuous unobstructed area for ease of travel and maintenance.
 - 4.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2'), to create a transition between the sidewalk and the building or frontage zone.
1. Hardscape treatments along the streetscape shall include the following:
 - 1.a. Sidewalk Zone
 - 1.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.
2. Street Furniture and Lighting along the streetscape shall include the following:
 - 2.a. Furnishings
 - 2.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 200 feet of streetscape length on average.
 - 2.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 300 feet of streetscape length on average.
 - 2.b. Bicycle Racks
 - 2.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.
 - 2.c. Pedestrian Lighting
 - 2.c.1. Use of special 40 West Arts District light with banners and connections for string lights, as identified in Chapter 1 of this document, regularly spaced at a maximum distance of forty (40') on average to create a consistent and regular pattern of lighting.

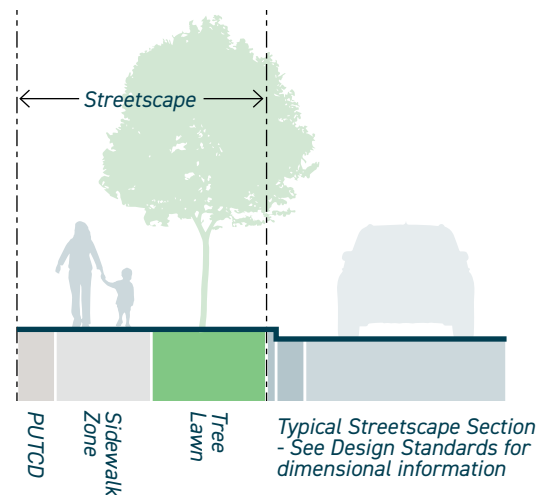

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.

Design Guidelines

1. Street level facades should use well-detailed, quality and durable materials that provide texture and depth. See the “Building Materials and Articulation” section for more information.
 2. The street level facade should be articulated to promote human scale building frontage through articulation, transparency, and architectural details. Appropriate techniques include:
 - 2.a. Recessed entries.
 - 2.b. Projecting window bays.
 - 2.c. Changes in street level setback.
 3. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between existing sidewalk grade and the finish floor elevation of the ground floor.
 4. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or other pedestrian corridors) where Lakewood Place intersects other streets or connections. Street level commercial space at corners should wrap the corner onto the intersecting streets or connection for a minimum distance of 15 feet.
1. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 1.a. Standardize structural bay spacing.
 - 1.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
 2. Canopies and awnings used to define the street level should be integrated into building design.
 - 2.a. Provide generously sized awnings, metal awning screens and other vertical screens to provide shade for glass windows/doors while preserving transparency.
 3. Exterior railings, stairs, steps, low walls, or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.

** Unless otherwise stated, DSG for building design apply only to street level or ground floor.*

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To design buildings so activities are visible from the public realm and vice versa, with "eyes on the street".
- » To encourage well-detailed facade fenestration.

Design Guidelines

1. The maximum length of a wall that does not satisfy the transparency requirement should be 10 feet in length.
2. Transparency on street level facade should be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
3. Windows on a street level facade should be transparent glass with a maximum reflectance of approximately 0.15 that allows for pedestrians to view the activity within the building.
4. Window openings should be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 4.a. Recessing a window opening a minimum of 4 to 6 inches behind the facade.
 - 4.b. Projecting windows a minimum of 4 to 6 inches beyond the facade.
1. Exterior railings, stairs, steps, low walls, or vertical elements should not significantly block visibility of the facade areas used to meet transparency standards.
2. Transparency at the street level should expand beyond the height requirement in the City of Lakewood Zoning Ordinance, which is 2'-10', to provide a greater facade area with transparency.
3. Transparent facades at the street level should be located to align with commercial and retail uses. When aligned with retail use, incorporate an outdoor patio, seating area, or amenity space.
4. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors).
5. Transparency alternatives such as murals may be considered.

Building Materials & Articulation

Intent

- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character and refined building material choices.
- » To promote the use of building materials on any visible facade that provide visual interest and a sense of human scale without appearing as a patchwork of incongruous colors or materials.
- » To discourage building materials that produce flat or featureless surfaces on any visible façade.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To encourage the use of innovative, high-quality, and sustainable materials.
- » To promote building materials that are integrated into a cohesive facade design.

Design Guidelines

1. Provide additional architectural articulation options that is more detailed at the ground floor, including:
 - 1.a. Expression of the structural system and infill panels through a change in plane of at least 3" on average.
 - 1.b. Articulation of window and doorway surrounds, which may include sills, lintels, pilasters, and mullions, through a change in plane of at least 2" on average.
 - 1.c. A system of horizontal and vertical articulating reveals of 3/8" width by 3/8" depth, minimum.
 - 1.d. A system of art or ornament integral to the building (such as an inset decorative panel or metal framework anchored to embeds in the building façade).
2. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.


1. Architectural materials should include the use of brick, masonry, precast, high quality metal panels/ cladding, and finishes.
2. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
3. Building facades should include multiple and frequent entries to provide activity and repetition.
4. Building designers are encouraged to use architectural canopies that are visually integrated into the building architecture.
5. Buildings are encouraged to setback the ground floor to provide active outdoor amenities along the street that promote active street life, including:
 - 5.a. Restaurant seating and cafe spaces.
 - 5.b. Areas for public art and creative placemaking.
 - 5.c. Areas for seating and gathering.



Building articulation through subtle changes in planes

W Line Bike Path (Lamar St. to Depew St.)

The W Line Bike Path is a regional bike path that connects west to Golden and east into Denver and other regional trails via the Lakewood Gulch Trail. This off-street connection on the ArtLine brings users from Lamar Street and the W Line station to Harlan Street and the south side of Mountair Park near Depew Street. The path serves an important role as a primary east-west multi-use path connecting people from the station and activities along Lamar Street to the park. The path is located on the north side of the light rail tracks in between the protective fence and the adjacent private properties. The standards and guidelines set forth in this section apply to the W Line Bike Path located in right-of-way between the RTD rail tracks and private property, and any future instances where the W Line Bike Path is relocated to publicly accessible areas within larger redevelopments.

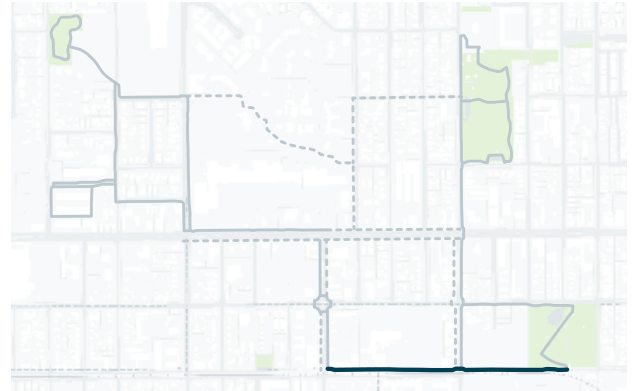

W Line Bike Path Map



A conceptual illustration of W Line Bike Path as an activated art corridor


Streetscape

Intent

- » To improve the pedestrian connections and the ArtLine experience from areas between Lamar Street and Mountair Park.
- » To provide a cohesive, attractive, and comfortable pedestrian connection with improved pedestrian and bicycle path experience, fence art and attractive building frontages.
- » To create a consistent design character along the path that features the ArtLine, public art and creative enhancements.
- » To allow a path design and alignment that is flexible and functions with existing properties, adaptive reuse, and new development.

Design Standards

1. The 40 West ArtLine 'Green Line' shall be included on the path and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
2. The path treatment shall have the following:
 - 2.a. The Walking Path Zone shall be a minimum of ten feet (10') and organized to create a continuous unobstructed area for ease of travel and maintenance.
3. Hardscape treatments along the path shall include the following:
 - 3.a. Walking Path Zone
 - 3.a.1. Use of cast-in-place concrete with regular scoring or acceptable special paving for all path areas, building connections, and the Walking Path Zone.
4. Street Furniture and Lighting along the streetscape shall include the following:
 - 4.a. Furnishings
 - 4.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 300 feet of path length on average.
 - 4.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 600 feet of path length on average.

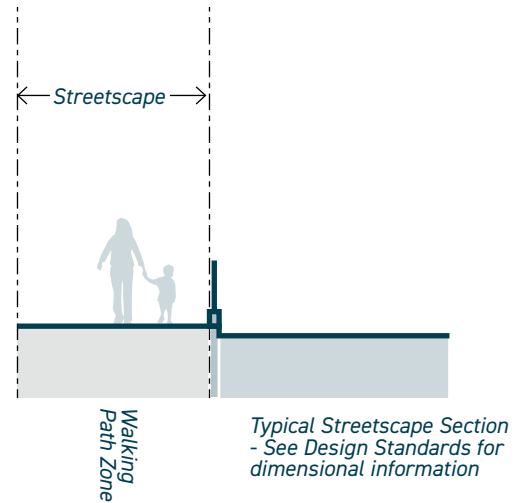

1.a. Bicycle Racks

- 1.a.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.

1.b. Pedestrian Lighting

- 1.b.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.

1. Street Crossings shall include the following:

- 1.a. Installation of a raised crossing or speed table at Lamar and Harlan Streets with a creative ArtLine treatment to delineate the route and help slow vehicles crossing the W Line Bike Path and ArtLine at these locations.

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote building designs fronting the path with texture and depth that provide a sense of human scale and have entrances fronting the path.
- » To promote visual interest activity at the ground level through a variety of uses and architectural design elements.
- » To encourage flexible ground level designs that can accommodate a variety of uses over time.
- » To create visual interest and commercial uses along the path.

Design Guidelines

1. The building facade facing the path should not be designed as a back of house service area or blank facade.
2. Ground level facades fronting the path should use well-detailed, quality, and durable materials that provide texture and depth. See the "Building Materials and Articulation" section for more information.
3. Building facades fronting the path should be articulated to promote human scale building frontage through articulation, transparency, and architectural details.
4. Buildings should maintain a relationship between the bike path and elevation of ground floor uses, not to exceed approximately 36 inches between existing path grade and the finish floor elevation of the ground floor.
5. Building entries and other site access points should be located fronting the path and include architectural details and amenities to create an identifiable entry.
6. Exterior railings, stairs, steps, low walls, or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To design buildings so activities are visible from the public realm and vice versa, with "eyes on the street or public space".
- » To encourage well-detailed facade fenestration.

Design Guidelines

1. Transparency on ground level facade should be located to provide visibility into ground level commercial uses within the building.
2. Windows on a facade facing the path should be transparent glass with a maximum reflectance of approximately 0.15 that allows pedestrians to view the activity within the building.
3. Window openings should be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 3.a. Recessing a window opening a minimum of 4 inches behind the façade.
 - 3.b. Projecting windows a minimum of 4 inches beyond the façade.
 - 3.c. Exterior railings, stairs, steps, low walls, or vertical elements should not significantly block visibility of the facade areas including transparency.
4. Transparency alternatives such as murals may be considered.

* Unless otherwise stated, DSG for building design apply only to street level or ground floor.

Building Materials & Articulation

Intent


- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character and material choices.
- » To promote the use of building materials on any visible facade that provide visual interest and a sense of human scale without appearing as a patchwork of incongruous colors or materials.
- » To discourage building materials that produce flat or featureless surfaces on any visible façade.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To encourage the use of innovative, high-quality and sustainable materials.
- » To encourage the use of building materials that are integrated into a cohesive facade design.

Design Guidelines

1. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.
2. Architectural precast materials should include the use of brick, masonry, high quality architectural metal panels/cladding, and finishes.
3. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
4. Building facades should include multiple and frequent entries to provide activity and repetition.
5. Building designers are encouraged to use architectural canopies that are visually integrated into the building architecture.
6. Buildings are encouraged to setback the ground floor to provide active outdoor amenities along the path that promote an active public realm, including:
 - 6.a. Areas for public art and creative placemaking.
 - 6.b. Areas for seating and gathering.

West 14th and 16th Avenues, and the corner of Teller Street

West 14th (the south side from Harlan to Depew Streets) and 16th Avenue (both sides from Reed to Teller Streets), and the corner of West 16th Avenue and Teller Street will promote a safe and comfortable pedestrian experience while featuring the ArtLine and selective locations for public art or creative placemaking enhancements. The improved streetscape amenities will promote the overall neighborhood character and ArtLine experience with tree lawns, sidewalks, limited street furnishings and pedestrian lighting. Considerations should be given to the relationship to adjacent uses, including existing residential homes, commercial uses, or undeveloped areas.

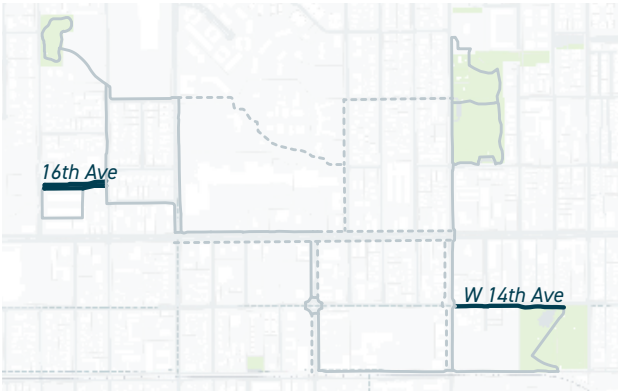

West 14th and 16th Avenues Map

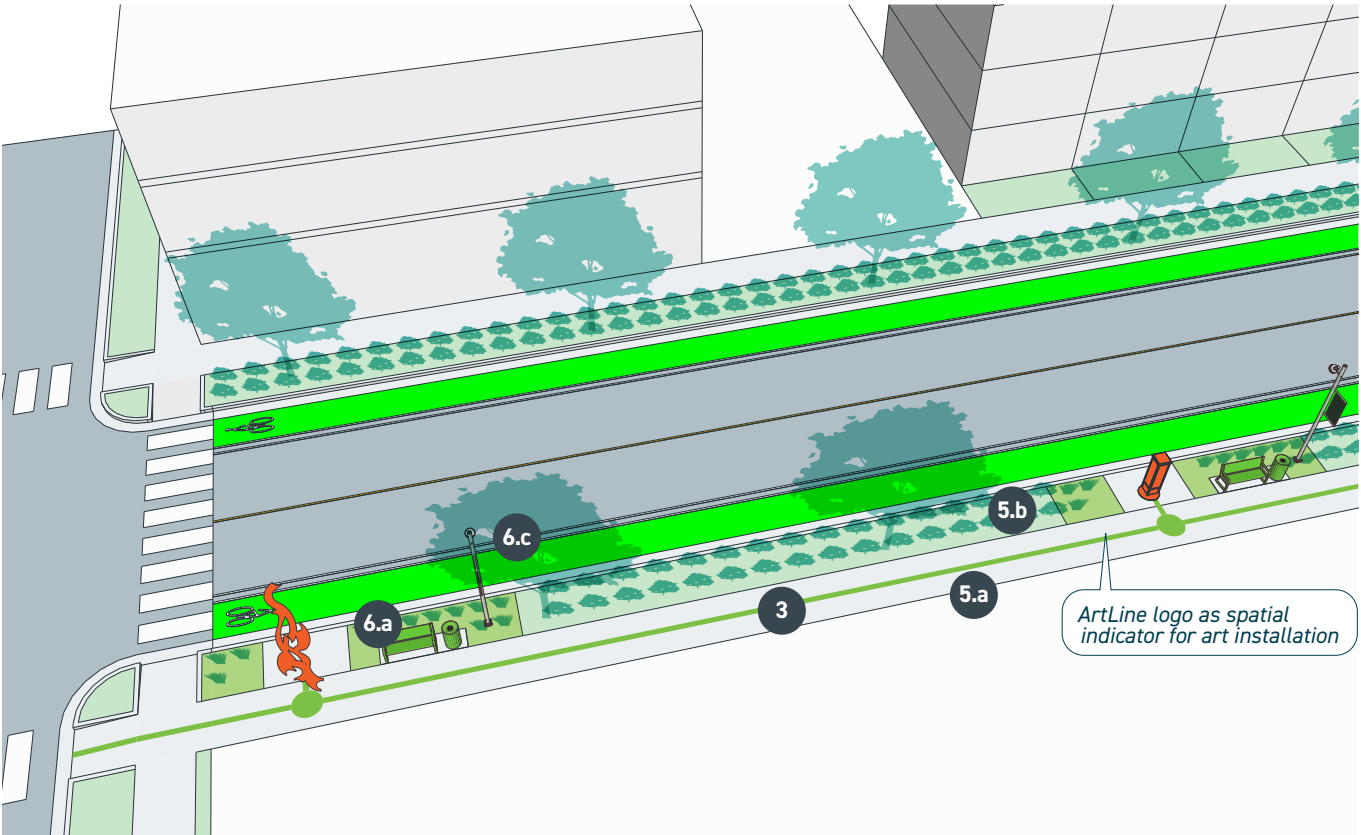


Figure 4. A conceptual illustration of 14th Ave

Streetscape Design Standards Number


Streetscape

Intent

- » To improve the pedestrian connections and the ArtLine experience.
- » To provide a cohesive, attractive, and comfortable pedestrian connection with improved sidewalks, sustainable landscape plantings and street trees.
- » To create a consistent design character along the street that features the 40 West ArtLine, public art, green bike lane marking where appropriate, and creative enhancements.
- » To allow a streetscape design that is flexible and functions with existing development, adaptive reuse, and new development.

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
 2. Illustrative perspective sections — 14th Avenue and 16th Avenue (see Figure 4) shall be representative of the typical streetscape where the ArtLine route is located.
 3. The 40 West ArtLine 'Green Line' shall be included on the south side of 14th Avenue from Harlan to Depew Streets, both sides of 16th Avenue from Reed to Teller Streets, and along the east side of Teller Street from 16th Avenue to the parking lot loop and back to 16th Avenue and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
 4. The streetscape treatment behind the curb shall have the following:
 - 4.a. Streetscape area a minimum of thirteen feet (13') wide including a Tree Lawn, Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 4.b. The Tree Lawn shall be a minimum of six feet (6') and contain streetscape elements, such as street furnishings, lights, landscape areas with trees.
 - 4.c. The Sidewalk Zone shall be a minimum of five feet (5') and organized to create a continuous unobstructed area for ease of travel and maintenance.
 - 4.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2'), to create a transition between the sidewalk and the building or frontage zone.
1. Hardscape treatments along the streetscape shall include the following:
 - 1.a. Sidewalk Zone
 - 1.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.
 - 1.b. Tree Lawn
 - 1.b.1. Use of consistent landscape and planting to provide a buffer and barrier between the sidewalk and curb.
 2. Street Furniture and Lighting along the streetscape shall include the following:
 - 2.a. Furnishings
 - 2.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 300 feet of streetscape length on average.
 - 2.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 600 feet of streetscape length on average.
 - 2.b. Bicycle Racks
 - 2.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.
 - 2.c. Pedestrian Lighting
 - 2.c.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.

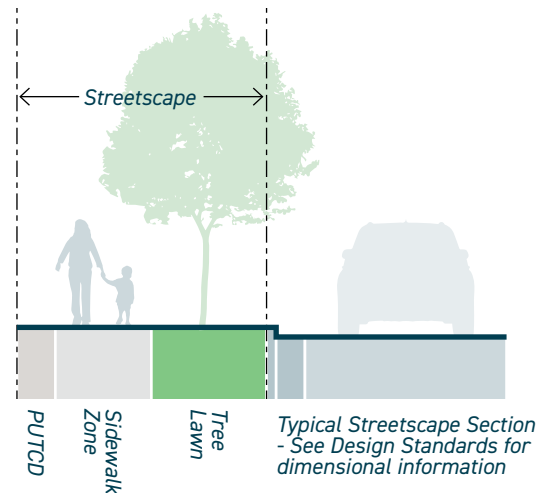

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.

Design Guidelines

1. Street level facades should use well-detailed, quality, and durable materials that provide texture and depth. See the “Building Materials and Articulation” section for more information.
 2. The street level facade should be articulated to promote human scale building frontage through articulation, transparency, and architectural details. Appropriate techniques include:
 - 2.a. Recessed entries.
 - 2.b. Projecting window bays.
 - 2.c. Changes in street level setback.
 3. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between existing sidewalk grade and the finish floor elevation of the ground floor.
 4. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or other pedestrian corridors) where these avenues intersect other streets or connections. Street level commercial space at corners should wrap the corner onto the intersecting streets or connection for a minimum distance of 15 feet.
1. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 1.a. Standardize structural bay spacing.
 - 1.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
 2. Canopies and awnings used to define the street level should be integrated into building design.
 - 2.a. Provide generously sized awnings, metal awning screens and other vertical screens to provide shade for glass windows/doors while preserving transparency.
 3. Exterior railings, stairs, steps, low walls, or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.



Pedestrian-oriented ground floor entries and stoops for townhomes or multi-family residential buildings

* Unless otherwise stated, DSG for building design apply only to street level or ground floor.

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To ensure that building activities are visible from the public realm and vice versa, with "eyes on the street".
- » To encourage well-detailed facade fenestration.

Design Guidelines

1. The maximum length of a wall that does not satisfy the transparency requirement should be 10 feet in length.
 2. Transparency on street level facade should be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
 3. Windows on a street level facade should be transparent glass with a maximum reflectance of approximately 0.15 that allows for pedestrians to view the activity within the building.
 4. Window openings should be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 4.a. Recessing a window opening a minimum of 4 to 6 inches behind the façade.
 - 4.b. Projecting windows a minimum of 4 to 6 inches beyond the façade.
 5. Exterior railings, stairs, steps, low walls, or vertical elements should not significantly block visibility of the facade areas used to meet transparency standards.
1. Transparency at the street level should expand beyond the height requirement in the City of Lakewood Zoning Ordinance, which is 2'-10', to provide a greater facade area with transparency.
 2. Transparent facades at the street level should be located to align with commercial and retail uses. When aligned with a retail use, incorporate an outdoor patio, seating area, or amenity space.
 3. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors).
 4. Transparency alternatives such as murals may be considered.

Building Materials & Articulation

Intent

- » To provide for the comfort and interest of the pedestrian environment through the provision of human-scaled architectural character and refined building material choices.
- » To promote the use of building materials on any visible façade that provide visual interest and a sense of human scale without appearing as a patchwork of incongruous colors or materials.
- » To discourage building materials that produce flat or featureless surfaces on any visible façade.
- » Provide architectural materials and facade articulation that emphasize the base of the building from the upper floors and visually differentiates the ground floor from upper floors.
- » To encourage the use of innovative, high-quality, and sustainable materials.
- » To promote building materials that are integrated into a cohesive facade design.


Design Guidelines

1. Provide additional architectural articulation options that is more detailed at the ground floor, including:
 - 1.a. Expression of the structural system and infill panels through a change in plane of at least 3" on average.
 - 1.b. Articulation of window and doorway surrounds, which may include sills, lintels, pilasters, and mullions, through a change in plane of at least 2" on average.
 - 1.c. A system of horizontal and vertical articulating reveals of 3/8" width by 3/8" depth, minimum.
 - 1.d. A system of art or ornament integral to the building (such as an inset decorative panel or metal framework anchored to embeds in the building façade).
2. Architectural scaling elements should be used to break down the appearance of large building facades into architectural patterns and component building forms. Building facades should provide variation of building massing corresponding to architectural or structural bay dimensions. Variation in building massing may include changes in wall plane or height and may relate to primary building entries, important corners or other significant architectural features.

1. Architectural materials should include the use of brick, masonry, precast, high quality metal panels/ cladding, and finishes.
2. Facade articulation should include a significant change in plane of the ground floor facade from the upper floors.
3. Building facades should include multiple and frequent entries to provide activity and repetition.
4. Building designers are encouraged to use architectural canopies that are visually integrated into the building architecture.
5. Buildings are encouraged to setback the ground floor to provide active outdoor amenities along the street that promote active street life, including:
 - 5.a. Restaurant seating and cafe spaces.
 - 5.b. Areas for public art and creative placemaking.
 - 5.c. Areas for seating and gathering.

West 17th Avenue

West 17th Avenue is an important connection between Walker-Branch Park, RMCAD, and Aviation Park. The street serves an important role as a primary east-west street connecting residential areas to the parks and major north-south streets. The two sections of 17th Avenue include a varying level of sidewalk and public realm improvements, ranging from unimproved conditions in the eastern section to partially improved areas between Pierce and Reed Streets. The DSG apply to the north side of 17th Avenue from Reed to Pierce Streets and the south side of 17th Avenue from Kendall to Harlan Streets when the future RMCAD segment is developed.

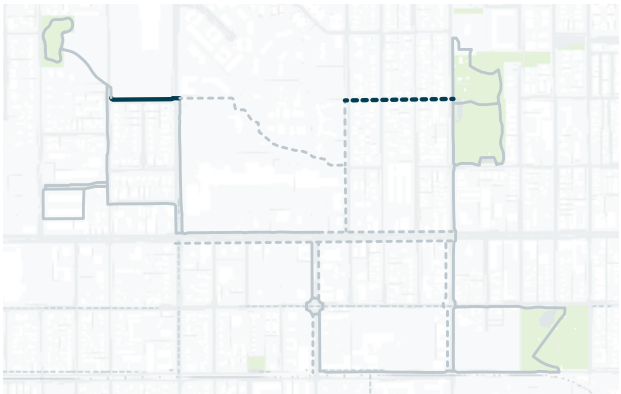

West 17th Avenue Map

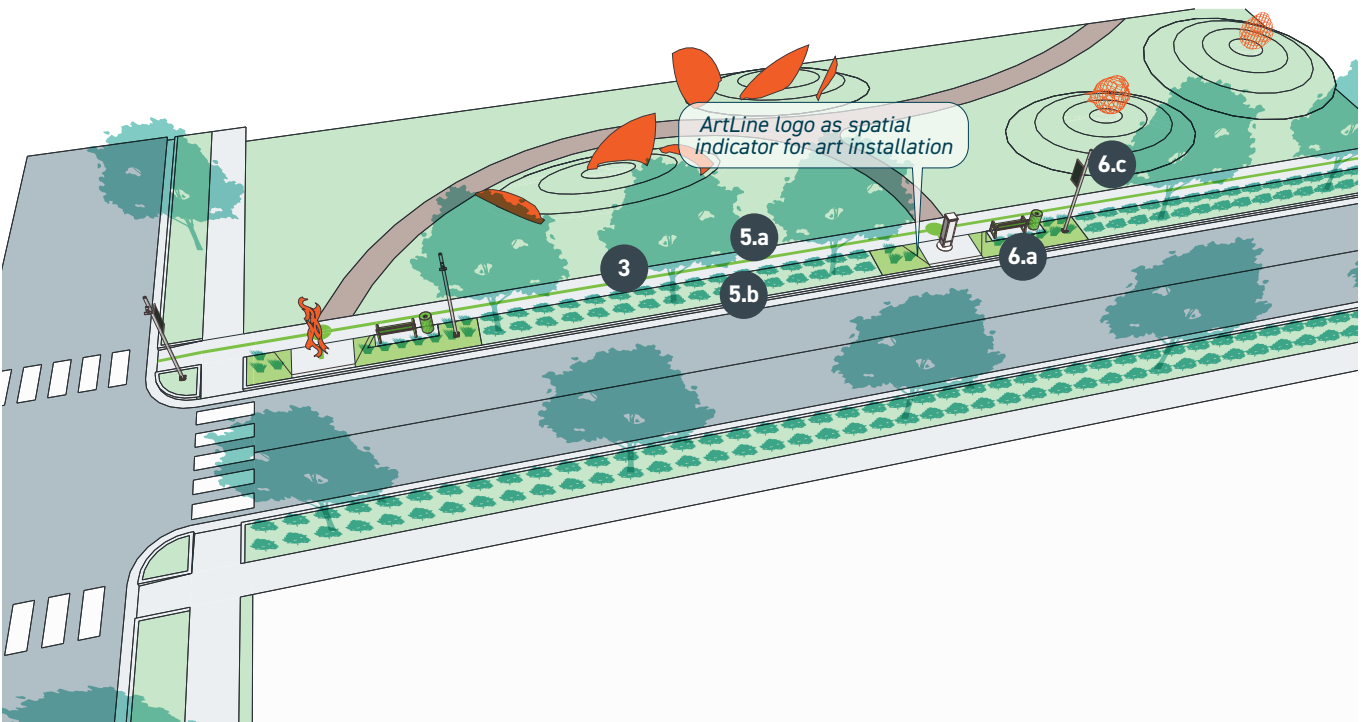


Figure 5. A conceptual illustration of 17th Ave (Reed to Pierce Streets)

Streetscape Design Standards Number


Streetscape

Intent

- » To improve the pedestrian connections and the ArtLine experience.
- » To provide a cohesive, attractive, and comfortable pedestrian connection with improved sidewalks, sustainable landscape plantings and street trees.
- » To create a consistent design character along the street that features the 40 West ArtLine, public art, and creative enhancements.
- » To allow a streetscape design that is flexible and functions with existing development (especially the residential character on the eastern portion of 17th Ave), adaptive reuse, and new development.

Design Standards

1. Compliance with all other requirements as defined in "Overall Streetscape Standards" in Chapter 1 of this document.
 2. Illustrative perspective sections — 17th Avenue (see Figure 5) shall be representative of the typical streetscape.
 3. The 40 West ArtLine 'Green Line' shall be included on the south side of the street between Harlan and Kendall Streets and the north side between Pierce and Reed Streets, and integrated with the sidewalk per the Overall ArtLine Marking Standards in Chapter 1 of this document.
 4. The streetscape treatment behind the curb for the ArtLine segments along 17th Avenue shall have the following:
 - 4.a. Streetscape area a minimum of thirteen feet (13') wide including a Tree Lawn, Sidewalk Zone, and the Pedestrian, Utility, & Traffic Control Devices (PUTCD). Reasonable exceptions may be made if needed to allow adaptive reuse of existing buildings.
 - 4.b. The Tree Lawn shall be a minimum of six feet (6') and contain streetscape elements, such as street furnishings, lights, landscape areas with trees.
 - 4.c. The Sidewalk Zone shall be a minimum of five feet (5') and organized to create a continuous unobstructed area for ease of travel and maintenance.
 - 4.d. A PUTCD shall be located outside the Sidewalk Zone, a minimum of two feet (2'), to create a transition between the sidewalk and the building or frontage zone.
1. Hardscape treatments along the streetscape shall include the following:
 - 1.a. Sidewalk Zone
 - 1.a.1. Use of cast-in-place concrete with regular scoring for all sidewalks and the Sidewalk Zone.
 - 1.b. Tree Lawn
 - 1.b.1. Use of consistent landscape and planting to provide a buffer and barrier between the sidewalk and curb.
 2. Street Furniture and Lighting along the streetscape shall include the following:
 - 2.a. Furnishings
 - 2.a.1. One (1) 40 West Arts District punch bench, as identified in Chapter 1 of this document, for every 300 feet of streetscape length on average.
 - 2.a.2. One (1) 40 West Arts District custom punch trash bin, as identified in Chapter 1 of this document, for every 600 feet of streetscape length on average.
 - 2.b. Bicycle Racks
 - 2.b.1. Bicycle Racks shall be provided in accordance with Lakewood zoning standards but shall be of the type specified in Chapter 1 of these DSG.
 - 2.c. Pedestrian Lighting
 - 2.c.1. Use of special 40 West Arts District light with banners, as identified in Chapter 1 of this document, regularly spaced.

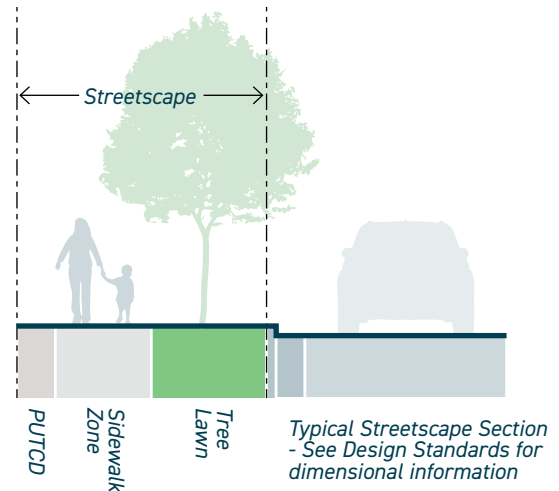

Ground Floor Building Design*

Pedestrian-Oriented Facade Design & Uses

Intent

- » To promote activity at the street level through a variety of uses and architectural design elements.
- » To promote street level designs with texture and depth that provide a sense of human scale.
- » To avoid creating a non-active ground floor along building facades.
- » To encourage flexible street level designs that can accommodate a variety of uses over time.
- » To create visual interest at the street level.

Design Guidelines

1. Street level facades should use well-detailed, quality, and durable materials that provide texture and depth. See the “Building Materials and Articulation” section for more information.
2. The street level facade should be articulated to promote human scale building frontage through articulation, transparency, and architectural details. Appropriate techniques include:
 - 2.a. Recessed entries.
 - 2.b. Projecting window bays.
 - 2.c. Changes in street level setback.
3. Buildings should maintain a relationship between the public sidewalk and elevation of street level uses, not to exceed approximately 36 inches between existing sidewalk grade and the finish floor elevation of the ground floor.
4. Street level commercial uses should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or other pedestrian corridors) where these avenues intersect other streets or connections. Street level commercial space at corners should wrap the corner onto the intersecting streets or connection for a minimum distance of 15 feet.
1. Street level non-residential spaces should be designed to accommodate future division to host small retail spaces or consolidation to support larger commercial or retail needs. Appropriate techniques include:
 - 1.a. Standardize structural bay spacing.
 - 1.b. Coordinate electrical, plumbing and HVAC systems with individual bays.
2. Canopies and awnings used to define the street level should be integrated into building design.
 - 2.a. Provide generously sized awnings, metal awning screens and other vertical screens to provide shade for glass windows/doors while preserving transparency.
3. Exterior railings, stairs, steps, low walls, or vertical elements should be visually consistent and integrated with the building facade and not significantly vary or detract from the visual continuity of the building facade.

* DSG for Ground Floor Building Design only apply to segment between Pierce and Reed Streets.

Transparency

Intent

- » To encourage facades that create a sense of human scale.
- » To provide visual interest on building facades and create interplay of light and shadow on the building's facade.
- » To ensure that building activities are visible from the public realm and vice versa, with "eyes on the street".
- » To encourage well-detailed facade fenestration.

Design Guidelines

1. The maximum length of a wall that does not satisfy the transparency requirement should be 10 feet in length.
 2. Transparency on street level facade should be located to provide visibility into street level commercial uses required by the Lakewood Zoning Ordinance.
 3. Windows on a street level facade should be transparent glass with a maximum reflectance of approximately 0.15 that allows for pedestrians to view the activity within the building.
 4. Window openings should be designed to provide depth of detail on the facade. Appropriate techniques include:
 - 4.a. Recessing a window opening a minimum of 4 to 6 inches behind the façade.
 - 4.b. Projecting windows a minimum of 4 to 6 inches beyond the façade.
 5. Exterior railings, stairs, steps, low walls, or vertical elements should not significantly block visibility of the facade areas used to meet transparency standards.
1. Transparency at the street level should expand beyond the height requirement in the City of Lakewood Zoning Ordinance, which is 2'-10', to provide a greater facade area with transparency.
 2. Transparent facades at the street level should be located to align with commercial and retail uses. When aligned with a retail use, incorporate an outdoor patio, seating area, or amenity space.
 3. Transparency should be focused at building corners (i.e., at intersections of two streets or activated alleys, private access drives, or pedestrian corridors).
 4. Transparency alternatives such as murals may be considered.



STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 7

To: Mayor and City Council
From: Travis Parker, Planning Director
Subject: **40WEST ARTLINE FRAMEWORK PLAN**

SUMMARY STATEMENT: The Planning Department respectfully requests City Council approve the adopted 40 West ArtLine Framework Plan as an amendment to the Lakewood Comprehensive Plan. The 40 West ArtLine is recommended in the Comprehensive Plan and other adopted City plans, including the West Colfax Vision 2040 Action Plan and the 40 West Arts District Urban Design and Mobility Concepts Plan. The Framework Plan is consistent with and helps implement these plans.

The development of the 40 West ArtLine Framework Plan included a robust public and stakeholder engagement process with thousands involved over the years. At a public hearing on December 6, 2023, Lakewood Planning Commission unanimously adopted the 40 West ArtLine Framework Plan and recommended that City Council approve it as an amendment to the Comprehensive Plan. On February 5, 2024, City Council discussed the 40 West ArtLine Framework Plan during a study session and moved the Plan forward to a public hearing to consider it as an amendment to the Comprehensive Plan.

BACKGROUND INFORMATION:

The [40 West ArtLine](#) is Lakewood's award-winning 4-mile outdoor art experience that connects people to parks, shopping, creative businesses, transit and more. The ArtLine was first envisioned by the community and recommended in the City Council-adopted [40 West Arts District Urban Design and Mobility Concepts Plan](#) in 2012. After years of planning and community engagement, and with the assistance of several federal, state, and local grants, the ArtLine launched in 2018 with more than 70 permanent and temporary public art installations created by over two dozen artists and many community volunteers. Thousands of community members participated in planning for the ArtLine and the launch celebration party in June 2018.

Since 2018, sustaining and advancing the development of the 40 West ArtLine has involved an informal collaboration between the community, multiple City departments, the Lakewood-West Colfax Business Improvement District (BID), 40 West Arts, artists, Metro West Housing Solutions, the City of Edgewater, and many others. Project partners have made great strides on the first phase of implementation of the ArtLine, but no formal organizational structure or dedicated funding exists to continue the ongoing support of this important project. Partners have long recognized the need for a formal plan and implementation tools to document the vision, set expectations, secure future funding and other resources, and help ensure the ArtLine's long-term sustainability. In 2022, the Denver Regional Council of Governments (DRCOG) awarded Lakewood a grant to develop an ArtLine Framework Plan and Design Standards & Guidelines to implement the plan and Lakewood City Council subsequently approved an IGA with DRCOG to accept the grant (Resolution 2022-45). The consulting firm Livable Cities Studio was selected by project partners through a competitive bid process to assist on the project.

GRANT FUNDED PROJECT DELIVERABLES

The primary project deliverable involved working with the community and stakeholders to develop the **40 West ArtLine Framework Plan**. This Plan officially documents the long-term aspirational community vision for the ArtLine

and will help guide next steps to ensure the ArtLine is vibrant and sustainable for years to come. The draft Plan was presented to Lakewood Planning Commission at a study session on November 8, 2023 and a public hearing on December 6, 2023 where it was unanimously adopted and recommended to City Council for approval as an amendment to the Lakewood Comprehensive Plan.

The grant also funded working with the City Council appointed Lakewood Design Review Commission (DRC) and stakeholders to develop **40 West ArtLine Design Standards & Guidelines (DSG)** to help implement the Plan by setting clear expectations that help ensure the community vision for the ArtLine is realized as public and private investment occurs along the route. The DSG are being presented to City Council as a separate agenda item for consideration for adoption.

COMMUNITY ENGAGEMENT

Planning for the 40 West ArtLine has involved thousands of residents and other stakeholders over the years and this project continued that level of engagement. The public process launched in early 2023 and included two community open houses, a bilingual survey, three community outreach events on the ArtLine, numerous stakeholder and small group meetings, monthly ArtLine Project Team meetings (which consists of representatives from several City departments as well as the Executive Director of the 40 West Arts District and the Executive Director of the Lakewood – West Colfax BID), presentations at community meetings including West Colfax Community Association (WCCA) and Two Creeks Neighborhood Organization, monthly updates at the 40 West Arts board meetings, presentations to the City of Edgewater History, Arts, Recreation and Parks Board, outreach through bi-lingual paid community connectors, and an interactive project website www.LakewoodTogether.org/40WestArtLine.

In addition to using the project website and various social media platforms through the City of Lakewood and project partners like 40 West Arts, the Lakewood-West Colfax BID, WCCA, and the City of Edgewater to share information about the project, more traditional outreach methods were also used including placing bilingual posters, flyers, and postcards at ArtLine area businesses and destinations to promote the project and mailing approximately 5000 postcards to owners and occupants in the ArtLine area in the spring and the fall to promote the outreach events and to invite review and comment on the draft Framework Plan and DSG. This multi-faceted outreach and engagement approach provided multiple ways to present information and gather community input and feedback at key points in the development of the Framework Plan and DSG.

40 WEST ARTLINE FRAMEWORK PLAN OVERVIEW

The 40 West ArtLine Framework Plan documents a long-term aspirational community vision for the ArtLine and helps guide future decisions to implement the project and to help secure funding for improvements, staffing, and maintenance. Key items related to the Plan are addressed below.

- The process to develop the Plan and the vision and recommendations involved considering, evaluating, and synthesizing the extensive amount of work and community engagement related to the ArtLine historically and throughout this recent planning effort. The summary of these past and current efforts is documented in the Existing Resources and Community Input Summary, which is available on the project website.
- The Plan identifies an overall project vision and includes the following goals and strategies that guide the recommendations throughout the Plan:

Goals

- Vibrant Art and Public Realm Experiences

- Manageable Smaller Loops
- Transformative Destinations
- Long Lasting Community Amenity

Strategies

- Densify Public Art
 - Integrate with Development
 - Improve Mobility and Connections
 - Create Programming and Destinations
 - Emphasize Sense of Identity
- A key recommendation that came out of the project is to break the ArtLine into shorter, more manageable loops by geographic area. These smaller loops, or Segments, each have their own unique character areas and recommendations, and include:
 - Aviation Park
 - Colfax Core
 - Lamar Street
 - Mountair Park
 - Walker-Branch Park
 - Rocky Mountain College of Art + Design (future proposed Segment)
 - The Plan identifies three high-priority projects to focus on implementing first to showcase what the entire ArtLine experience can become. The projects include:
 - The HUB at 40 West Arts Plaza
 - Lamar Street Art Corridor, Street Gallery + Festival Street
 - Densify W Line Bike Path Art
 - The Plan includes conceptual designs to improve conditions for walking and bicycling and consistent ArtLine marking treatments so projects can be funded when grants and other resources become available.
 - The final section of the Plan focuses on Implementation and includes a matrix outlining timelines, responsible parties, and funding for the recommendations made for each of the six ArtLine Segments. This matrix will help guide future decisions and priorities around implementing the overall vision.
 - A Spanish language summary of the Framework Plan was requested at the September 20, 2023 final project open house after the WCCA meeting. This summary is available on the project website.

BUDGETARY IMPACTS: None.

STAFF RECOMMENDATIONS: That City Council approve the adopted 40 West ArtLine Framework Plan as an amendment to the Lakewood Comprehensive Plan.

ALTERNATIVES: Not approve the adopted 40 West Framework Plan as an amendment to the Comprehensive Plan.

PUBLIC OUTREACH: This item had extensive public outreach and engagement as described above and was promoted through the regular communication channels for an item coming before City Council.

NEXT STEPS: The 40 West ArtLine Framework Plan will be an amendment to the Comprehensive Plan immediately following Council action and staff and project partners will continue ongoing efforts to implement the vision in the adopted plan.

ATTACHMENTS: Resolution 2024-10
Adopted 40 West ArtLine Framework Plan

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

2024-10

A RESOLUTION

APPROVING THE 40 WEST ARTLINE FRAMEWORK PLAN AS AN AMENDMENT TO THE LAKEWOOD COMPREHENSIVE PLAN

WHEREAS, the City of Lakewood Planning Commission adopted the Lakewood Comprehensive Plan on March 18, 2015; and

WHEREAS, the City of Lakewood City Council approved the Lakewood Comprehensive Plan on April 27, 2015; and

WHEREAS, the 40 West ArtLine is recommended in the Comprehensive Plan and other adopted City plans, including the West Colfax Vision 2040 Action Plan and the 40 West Arts District Urban Design and Mobility Concepts Plan; and

WHEREAS, the 40 West ArtLine Framework Plan will therefore help implement the Comprehensive Plan and the other adopted City plans; and

WHEREAS, The City has worked with thousands of community members and stakeholders to develop the 40 West ArtLine Framework Plan that establishes a long-term vision for this award-winning amenity; and

WHEREAS, the Planning Commission conducted a public hearing on the 40 West ArtLine Framework Plan, with proper notice given; and

WHEREAS, on December 6, 2023 the Planning Commission unanimously adopted the 40 West ArtLine Framework Plan and recommended that City Council approve the Plan as an amendment to the Lakewood Comprehensive Plan; and

WHEREAS, the City Council has conducted a public hearing on the 40 West ArtLine Framework Plan, with proper notice; and

WHEREAS, the City Council has considered the public testimony received, the action of the Planning Commission, and the staff report and recommendation; and

WHEREAS, on February 26, 2024, the City Council approved said ArtLine Framework Plan as an amendment to the Lakewood Comprehensive Plan.

NOW, THEREFORE, BE IT RESOLVED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. The adopted 40 West ArtLine Framework Plan as presented to the City Council on February 26, 2024 is hereby approved as an amendment to the Comprehensive Plan.

SECTION 2. The Mayor and City Clerk are hereby authorized and directed to execute and attest, respectively, their signatures on this Resolution as evidence of the approval of said Plan as an amendment to the Comprehensive Plan on behalf of the City Council.

SECTION 3. This Resolution shall become legally effective immediately following final passage.

INTRODUCED, READ, AND ADOPTED by a vote of ____ for and ____ against at a hybrid regular meeting of the Lakewood City Council on February 26, 2024, at 7 o'clock p.m. at the Lakewood Civic Center, 480 S. Allison Parkway, Lakewood, Colorado.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

Approved as to form:

Alison McKenney Brown, City Attorney



40 West ArtLine: A Framework for Moving Forward

February 2024

Prepared by Livable Cities Studio



Lakewood
Full of Possibilities

Table of Contents

4	Acknowledgments	
7	Framework Plan Overview	
11	Introduction	
12	The ArtLine Story	
13	The ArtLine in Context	
14	Importance of Public Art and Creative Placemaking	
15	ArtLine + The Community	
17	Strategic Framework	
18	ArtLine Vision, Goals + Strategies	
20	ArtLine Route + Access	
22	ArtLine Segments + Priority Projects Overview	
24	Aviation Park	
30	Colfax Core	
36	Lamar Street	
40	Mountair Park	
44	Walker-Branch Park	
50	Rocky Mountain College of Art + Design (Future)	
55	ArtLine Design Considerations	
56	Streetscape Elements	
58	The Green Line	
62	Public Art + Creative Placemaking	
65	Implementation	
66	Implementation Matrix	
70	Art Selection Process	
72	Organization and Maintenance Considerations	
76	Policy and Regulatory Considerations	



Acknowledgments

The 40 West ArtLine project helps implement numerous community goals related to placemaking, public health, multi-modal mobility, economic development, public art and more. Because it is such a multi-faceted and complex project, its progress to date has been sustained through a coordinated effort between several City departments and community partners along the West Colfax Avenue corridor.

The City-led ArtLine Project Team helps guide project decisions. The City representatives include staff from Planning, Community Resources – including Heritage, Culture and the Arts and Parks, Economic Development, and Public Works. Additional existing partnerships include the 40 West Arts District, a state-certified Colorado Creative district, and the Lakewood-West Colfax Business Improvement District, a Colorado special district formed in 2011. These partners collaborate on decisions related to funding, maintenance, implementation of investments and programming along the ArtLine. This Framework Plan and supporting efforts will help current and future project partners document a long-term vision to guide the future of the ArtLine.

Funding to develop this Framework Plan was provided through a grant from the Denver Regional Council of Governments. Grants from the Colorado Department of Transportation, National Endowment for the Arts, Jefferson County Public Health, and several non-profit and other community partners have also been instrumental in supporting the ArtLine.

Key Project Partners + Community Collaborators

40 West Arts Creative District
City of Edgewater
City of Lakewood
Lakewood-West Colfax Business Improvement District (BID)
Metro West Housing Solutions (MWHS)
Rocky Mountain College of Art + Design (RMCAD)
Sprout City Farms
West Colfax Community Association (WCCA)

ArtLine Project Team

Liz Black, Executive Director, 40 West Arts
Bradley Chronowski, City of Lakewood Community Resources
Nestor Fedak, City of Lakewood Planning
Laine Godsey, City of Lakewood Community Resources
Christy Ivanov, City of Lakewood Planning
Bill Marino, Lakewood West Colfax Business Improvement District
Laura Moody, City of Lakewood Economic Development
Alexis Moore, City of Lakewood Planning
Paul Rice, City of Lakewood Planning
Matthew Seubert, City of Lakewood Planning
Shannon Terrell, City of Lakewood Planning
Roger Wadnal, City of Lakewood Planning
Mike Whiteaker, City of Lakewood Transportation Engineer

Consultants

Livable Cities Studio

Meredith Wenskoski

Todd Wenskoski

Yishuen Lo

Chelsea Gieryic

WeilWorks

Tracy Weil

Community Connectors

Brenda Gurule, Executive Director, Chicano Humanities and Arts Council Gallery

Reverend Ruben Rodriguez, Pastor, Mountair Christian Church

Two community connectors, Brenda Gurule and Rev. Ruben Rodriguez, provided significant support on the outreach efforts for this project by spreading the word about the plan, displaying project information in an ArtLine area art gallery and church, attending community events to speak with community members, encouraging people in their networks to attend events, and inviting people to take the ArtLine survey. These individuals are both deeply connected to the community surrounding the ArtLine and met regularly with the project team to share feedback.



Ground mural, Harvest Labyrinth by Katy Casper, along the W Line bike path



Sculpture art, Stegoskel by PUNCH, within Walker-Branch Park



Fence art, Today is the Day by Yulia Avgustinovich, along Lamar St



Sculpture art, Dermal Plate Gateway by PUNCH, within Mountain Park



Interactive art, Affirmation Station by Timothy Flood, in Lamar Station Plaza




Wall mural, Take Time by DAAS, at the W Line bike path and Harlan St


Framework Plan Overview

The 40 West ArtLine is an outdoor art and creative placemaking experience in the heart of the state-certified 40 West Arts Creative District in Lakewood, Colorado. This free outdoor gallery experience tests new urban design and placemaking ideas and showcases over 70 temporary and permanent art and creative placemaking installations created by dozens of artists and many community volunteers. The route is marked by a green line on the ground and follows sidewalks, bike and park paths, and local streets to connect people to parks, dining, shopping, public art, transit and more. The ArtLine is connected to

the greater metro Denver region via historic West Colfax Avenue and the RTD W Line light rail. Originally envisioned by the community in 2011 and with support from an Our Town grant from the National Endowment for the Arts, the ArtLine officially launched in 2018 and is envisioned to eventually become the longest continuous arts experience in Colorado. This Framework Plan charts the ArtLine course for the years to come by documenting the vision, goals and key project priorities for this award-winning community amenity.

40 West ArtLine Map: Recommended Route

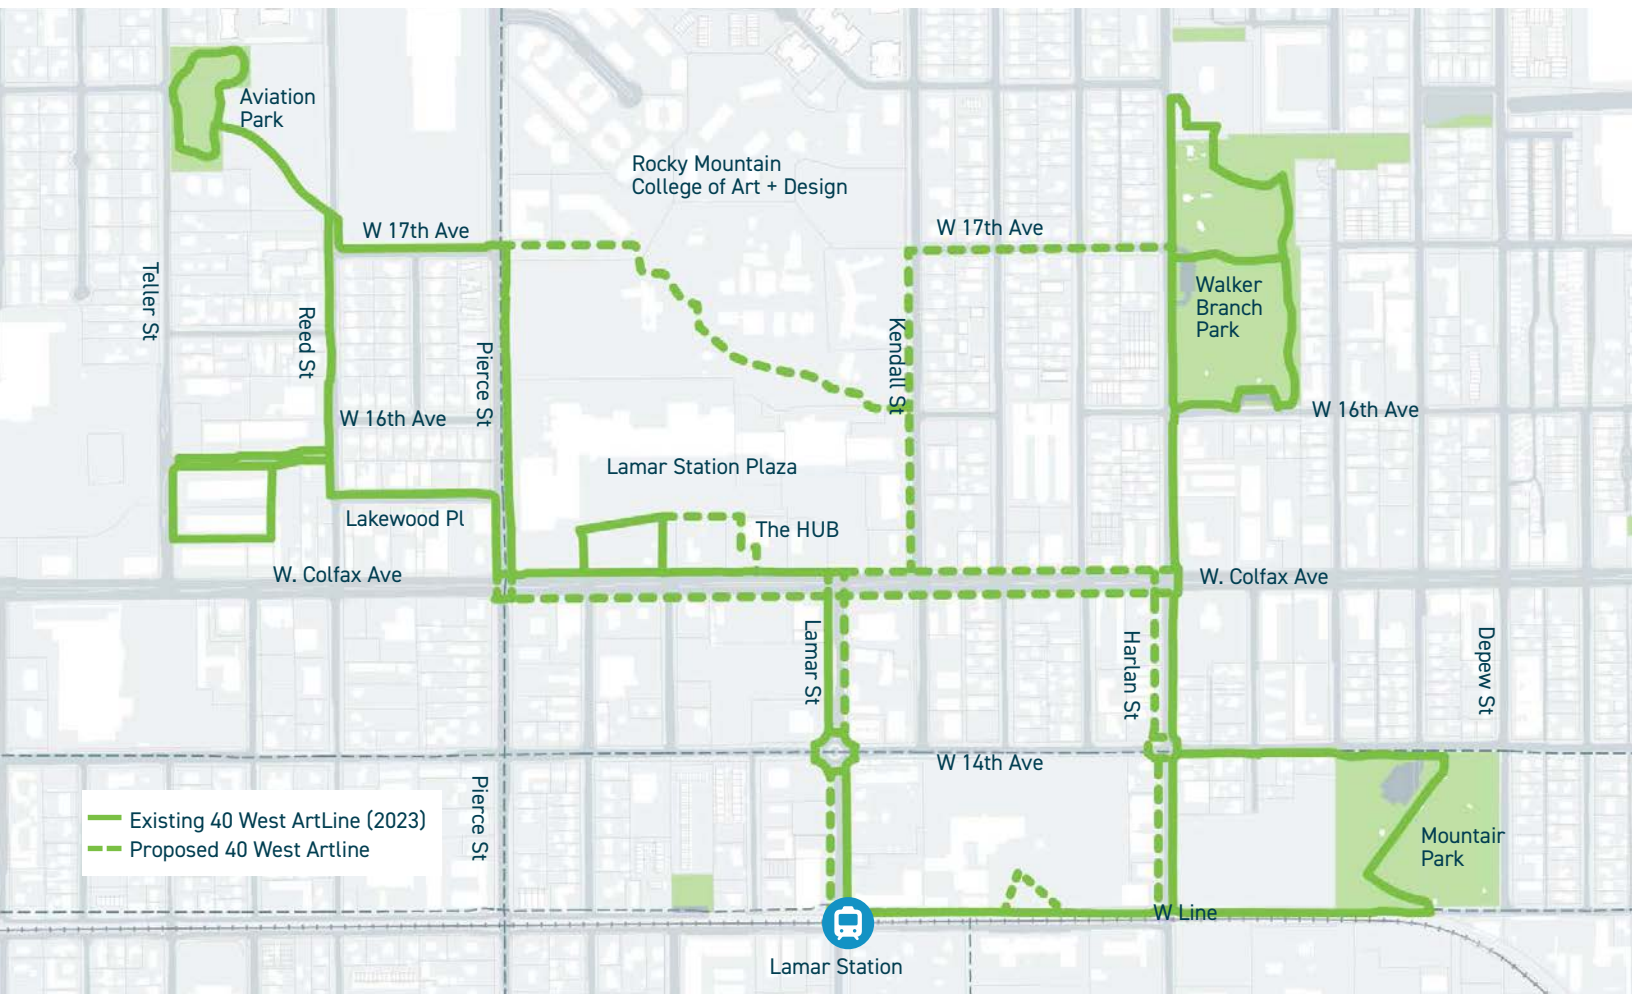

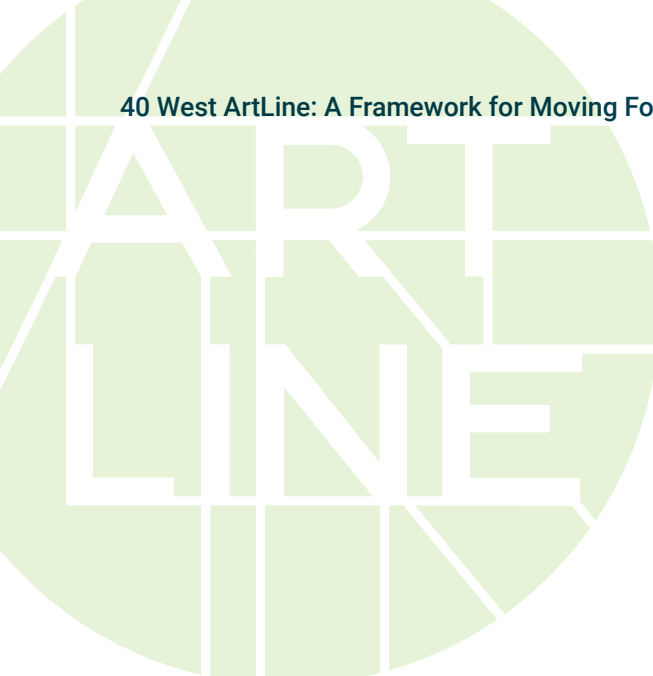

VISION

The 40 West ArtLine is a 4-mile public art and creative placemaking experience that connects parks, transit, local businesses, and neighborhoods in the 40 West Arts Creative District. The 40 West ArtLine: A Framework for Moving Forward is a plan that reflects the community's vision to enhance the ArtLine as a creative placemaking amenity that supports a resilient, equitable, and vibrant neighborhood with abundant cultural and transportation opportunities. The following goals and strategies were developed based on community and stakeholder input and guide the plan recommendations.

GOALS

Vibrant Art and Public Realm Experiences

Manageable Smaller Loops

Transformative Destinations

Long Lasting Community Amenity

STRATEGIES



Densify Public Art




Integrate with Development



Improve Mobility and Connections



Create Programming and Destinations




Emphasize Sense of Identity




KEY CONCEPTS

*Priority Projects



Aviation Park

1. State-Owned Parcel Improvements
2. Activate Aviation Park Art Pedestals
3. 17th Avenue Sculpture Gardens
4. Reed Street Utility Art
5. Reed Street Mobility Improvements
6. Reed Street and 17th Avenue Intersection Improvements
7. 16th Avenue Streetscape and Creative Business Area
8. Lakewood Place Mural and Lighting Experience



Colfax Core

1. **The HUB at 40 West Arts Plaza***
2. Art Gateway at Lamar and Colfax
3. Art Along West Colfax Streetscape
4. Improve North-South Crossings Along West Colfax Avenue
5. Lamar Station Plaza Creative Hub




Lamar Street

1. **Lamar Street Art Corridor, Street Gallery + Festival Street***
2. Art With Private Development
3. Attractive and Complete Street
4. Lamar Street Gateway
5. Environmental Art along Lamar Street




Mountair Park

1. **Densify W Line Bike Path Art***
2. Harlan Streetscape Improvements
3. Brickyard Development Art + Community Gathering Spaces
4. Mountair Park Gateway Moments



Walker-Branch Park

1. 17th Avenue and Harlan Street Intersection
2. Harlan Streetscape Improvements
3. Walker-Branch Park Art
4. Harlan Street and 18th Avenue Crossing
5. Opportunities for Programming, Gathering and Events
6. Walker-Branch Park Gateway and Wayfinding



Rocky Mountain College of Art + Design (RMCAD)

1. ArtLine Connection Through RMCAD
2. Adaptive Reuse of Historic Building and Outdoor Performance Garden
3. RMCAD Art and Sculpture Garden
4. Kendall Streetscape
5. 17th Avenue and Kendall Street Intersection
6. 17th Avenue Streetscape



Introduction

- 12 The ArtLine Story
- 13 The ArtLine in Context
- 14 Importance of Public Art and Creative Placemaking
- 15 ArtLine + The Community

The ArtLine Story

The 40 West ArtLine is a community inspired 4-mile long public art and creative placemaking amenity that meanders through the historic and eclectic neighborhoods of the 40 West Arts Creative District in Lakewood, Colorado. The ArtLine's popularity has continued to grow since the idea of creating an arts trail in this area first emerged in 2011 while the community was planning for the future Lamar Station on the W Line light rail, which opened in 2013. The arts trail was envisioned as a green painted line on the ground to connect three neighborhood parks with transit, historic neighborhoods, local businesses, and Creative District amenities. The ArtLine, which officially launched in 2018 with over 70 temporary and permanent art installations created by over two dozen artists and hundreds of community volunteers, has become an award-winning creative placemaking experience that has overwhelming public support. The ArtLine has beautified the area through public art and provided new physical and social connections within the community.

Since implementation, the necessity for a formal framework plan has arisen to help prioritize and guide future decisions and ensure the ArtLine is well-maintained and sustainable. The 40 West ArtLine: A Framework for Moving Forward is a long-term plan to chart the ArtLine's course for the years to come. The plan documents the ArtLine vision, synthesizes the previous work and extensive community engagement since the ArtLine's early beginnings, builds on the existing public art and creative placemaking features and identifies additional opportunities for new art and public space amenities, conceptualizes designs to improve conditions for walking and bicycling, defines what the green line treatment should be, and provides guidance to put the plan into place and to fund and maintain the project. In addition to this plan, the *40 West ArtLine Design Standards and Guidelines* have been developed as a separate but related document to provide design guidance for the public and private realm streetscape in the six different character segments of the 40 West ArtLine.



40 West ArtLine Map by Elle Powell




ArtLine Dedication, June 2018

The ArtLine in Context

The ArtLine is part of the Denver metropolitan region's vibrant arts and culture scene and is situated in Lakewood, CO, directly west of Denver. The ArtLine serves residents in the historic neighborhoods where it is located as well as visitors who can easily access this unique amenity via the Lamar Station on the W Line light rail, by foot or bicycle from the W Line bike path that connects to the regional Lakewood Gulch Trail, or by bus or vehicle from West Colfax Avenue, an arterial street that provides a major connection between Lakewood and Denver.

The ArtLine is located within the state-certified 40 West Arts Creative District and contributes to a robust regional art system, with Meow Wolf, Denver's Arts District on Santa Fe, the Denver Art Museum, and RiNo Art District all within a 6-mile radius. The ArtLine is anchored by The HUB at 40 West Arts, which houses seven unique galleries and creative businesses and serves as a central gathering and events space for 40 West, the Lakewood community, visitors, and artists. The HUB at 40 West Arts is a key entry point to the ArtLine and is located along historic West Colfax Avenue and within the Lamar Station Plaza shopping center, home to the legendary and recently re-opened Casa Bonita restaurant.

ArtLine Regional Context Map

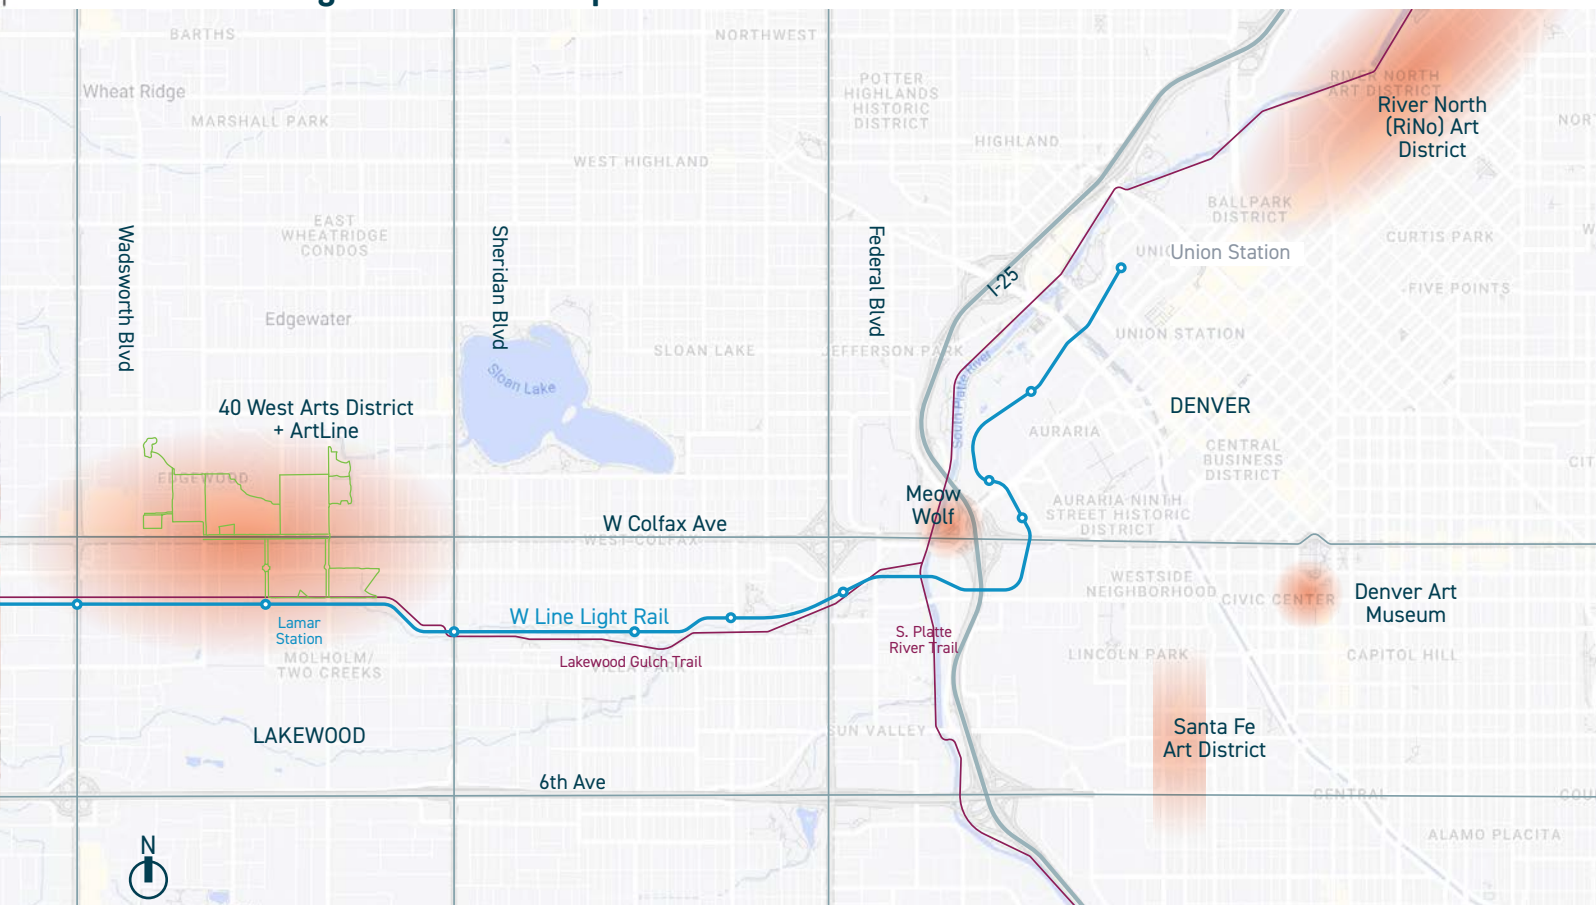

Importance of Public Art and Creative Placemaking

Public art and creative placemaking – generally defined as diverse partners using arts and culture to shape the character of a place to spur local economic development, enhance social connections, and improve the physical environment – are foundational to the 40 West ArtLine. Creative placemaking has many documented benefits. A 2022 Urban Land Institute study found that it promotes social cohesion, reduces crime, and helps build trust among diverse groups. It is also an economic driver. Similar creative placemaking projects like the High Line in New York City and the Indianapolis Cultural Trail have generated billions of dollars in economic benefit to local communities. Done well, creative placemaking can also promote equity by leading with a placekeeping approach that attracts energy, amenities, and investments while acting to retain people, character, history, and culture.

The ArtLine is a community influenced creative placemaking project. Its benefits to area residents and the City of Lakewood are both anecdotal and quantifiable. More than 4000 community members attended the 2018 ArtLine opening celebration and many expressed that the project generated increased pride in their neighborhood. One resident shared photos of her grandchildren joyfully discovering artwork along the green line, demonstrating how the ArtLine improved her family's lives. Social connections and quality of life have been improved for dozens of residents of the Creekside community, an affordable senior living development on the ArtLine, through participation in a community art project and an immersive performance arts experience during the COVID pandemic. Funded through an AARP grant in 2020, this collaborative project paid local 40 West artists to work with the residents in creating a visual storytelling fence art installation that beautified their neighborhood and helped the seniors feel more connected to their community during a time of isolation. The grant also funded Handsome Little Devil's, a local arts group, to bring Project Joy Bomb, an immersive parade-like arts experience, to the seniors and other residents along the ArtLine. Economic benefits of the ArtLine are notable, ranging from large-scale development projects, financed because of their proximity to the 40 West

Arts District and the ArtLine, to direct payments to artists, fabricators, and engineers through public art commissions and purchases. One local artist along the route made his career highest one-day sale to a visitor following the ArtLine map who stopped at his gallery to shop. Public health benefits are documented through an annual ArtLine Pedestrian and Bicycle Count, which showed a 130% increase in pedestrians and a 325% increase in bicyclists using the ArtLine route in 2021 compared to 2018 before the ArtLine launched. Estimates suggest nearly 235,000 people will walk or bike along the ArtLine each year and benefit from the creative placemaking project. This Framework Plan outlines strategies to bolster the ArtLine as an amenity that will continue to directly involve and benefit the surrounding community for years to come.



Handsome Little Devil's Joy Bomb, funded by AARP grant in 2020

ArtLine + The Community

The 40 West ArtLine is a community driven project that is the result of extensive public engagement and planning efforts with thousands of stakeholders. The process to develop this *40 West ArtLine Framework Plan* built on the past community engagement work and included additional

community pop-up and open house events, an online bi-lingual survey, and small group workshops to gather input and feedback. Some of the key community feedback that helped develop the goals and recommendations in this plan includes:



For more information about the ArtLine's inception, community engagement efforts and input, and additional resources please refer to the supplemental 40 West ArtLine Existing Resources and Community Input Summary document.



APPENDIX

Strategic Framework

18	ArtLine Vision, Goals + Strategies
20	ArtLine Route + Access
22	ArtLine Segments + Priority Projects Overview
24	Aviation Park
30	Colfax Core
36	Lamar Street
40	Mountair Park
44	Walker-Branch Park
50	Rocky Mountain College of Art + Design (Future)

ArtLine Vision, Goals + Strategies

Vision

The 40 West ArtLine is a 4-mile public art and creative placemaking experience that connects parks, transit, local businesses, and neighborhoods in the 40 West Arts Creative District. The 40 West ArtLine: A Framework for Moving Forward is a plan that reflects the community's vision to enhance the ArtLine as a creative placemaking amenity that supports a resilient, equitable, and vibrant neighborhood with abundant cultural and transportation opportunities. The following goals and strategies were developed based on community and stakeholder input and guide the plan recommendations.

Goals

- a. **Vibrant Art and Public Realm Experiences.** Establish an identifiable public realm with a consistent and aesthetically interesting marking for the ArtLine that promotes pedestrian safety and comfort and a dynamic artistic and creative placemaking experience.
- b. **Manageable Smaller Loops.** Break down the ArtLine into shorter, identifiable segments that are anchored by major destinations, amenities, or clusters of activities and art and are easier for people to experience during a typical visit.
- c. **Transformative Destinations.** Enhance existing and create new transformative destinations that attract visitors, support local resident needs, and promote local businesses and development.
- d. **Long Lasting Community Amenity.** Ensure that the strategies and recommendations support a community amenity that is well-operated and maintained and flexible and resilient in the face of future changes.



Public Art and Creative Placemaking Strategies

Five major recommended strategies have emerged to enhance the ArtLine and support the goals. Each strategy addresses community desires and concerns that have surfaced throughout the engagement process. The six ArtLine segments concentrate on a different set of strategies, all working toward the overall goals and vision to enhance the ArtLine as a sustainable creative placemaking amenity.



Densify Public Art

Art should be focused strategically to elevate the experience and add an element of surprise and discovery for ArtLine visitors.



Integrate with Development

Embrace opportunities to enhance the ArtLine experience by incorporating art, placemaking, and enhanced streetscapes with new development and adaptive reuse projects.



Improve Mobility and Connections

A safe, comfortable, well-lit, and continuous pedestrian and bicycle network is essential for the long-term success of the ArtLine.



Create Programming and Destinations

Places for community to come together to celebrate, play, shop, dine, and connect are important for a vibrant and dynamic ArtLine experience.



Emphasize Sense of Identity

The ArtLine area is rich in history and culture and many opportunities exist to celebrate this and create memorable places and experiences.

ArtLine Route + Access

Based on community feedback and an understanding of ArtLine visitors based on observation during annual ArtLine pedestrian and bicycle counts, people do not typically experience the entire 4-mile ArtLine at one given time, and instead, users explore the route in smaller more manageable segments. Therefore a desire exists to create shorter distinct segments and sub-loops and to enhance the ArtLine to improve wayfinding and the walking and biking experience to connect to area destinations like parks, Lamar Station Plaza, and the Lamar Light Rail Station. While the overall ArtLine route largely stays the same, to create the shorter segments and sub-loops, several additions are recommended:

- A key recommendation is to bring the ArtLine through the Rocky Mountain College of Art + Design (RMCAD) campus in the future. Throughout the public engagement process there was strong support for exploring a connection through the historic campus and RMCAD has supported this idea. The RMCAD route would start at the corner of 17th and Pierce and travel east through campus, pass the sculpture garden, and emerge on Kendall Street. This expansion would include implementing the ArtLine along the west side of Kendall Street from West Colfax Avenue to 17th Avenue where the route would head east along the south side of 17th Avenue to connect with Walker-Branch Park. Additional design work, funding, and collaboration with RMCAD is necessary to realize this future connection.
- The additional suggested expansions include implementing the ArtLine on both sides of the street along Colfax Avenue from Pierce Street to Harlan Street with the West Colfax Safety Project, both sides of Lamar Street from Colfax Avenue to 13th Avenue, and both sides of Harlan Street from 17th Ave to the W Line bike path.

Identifying access points into the ArtLine route is also important for ensuring a welcoming entrance to the experience and a place where visitors can find ArtLine information and resources. While the ArtLine can be accessed and enjoyed from any starting point along the route, there are a few main entry locations that should be prioritized for people accessing the route by foot, bicycle, rail, or vehicle. These locations include the HUB at 40 West Arts, the three parks, and the W Line Lamar Street light rail station. Priority should be given to additional signage and information for visitors at these entry points.




Today is the Day by Yulia Avgustinovich



W Line bike path

40 West ArtLine Map: Recommended Route + Access Points

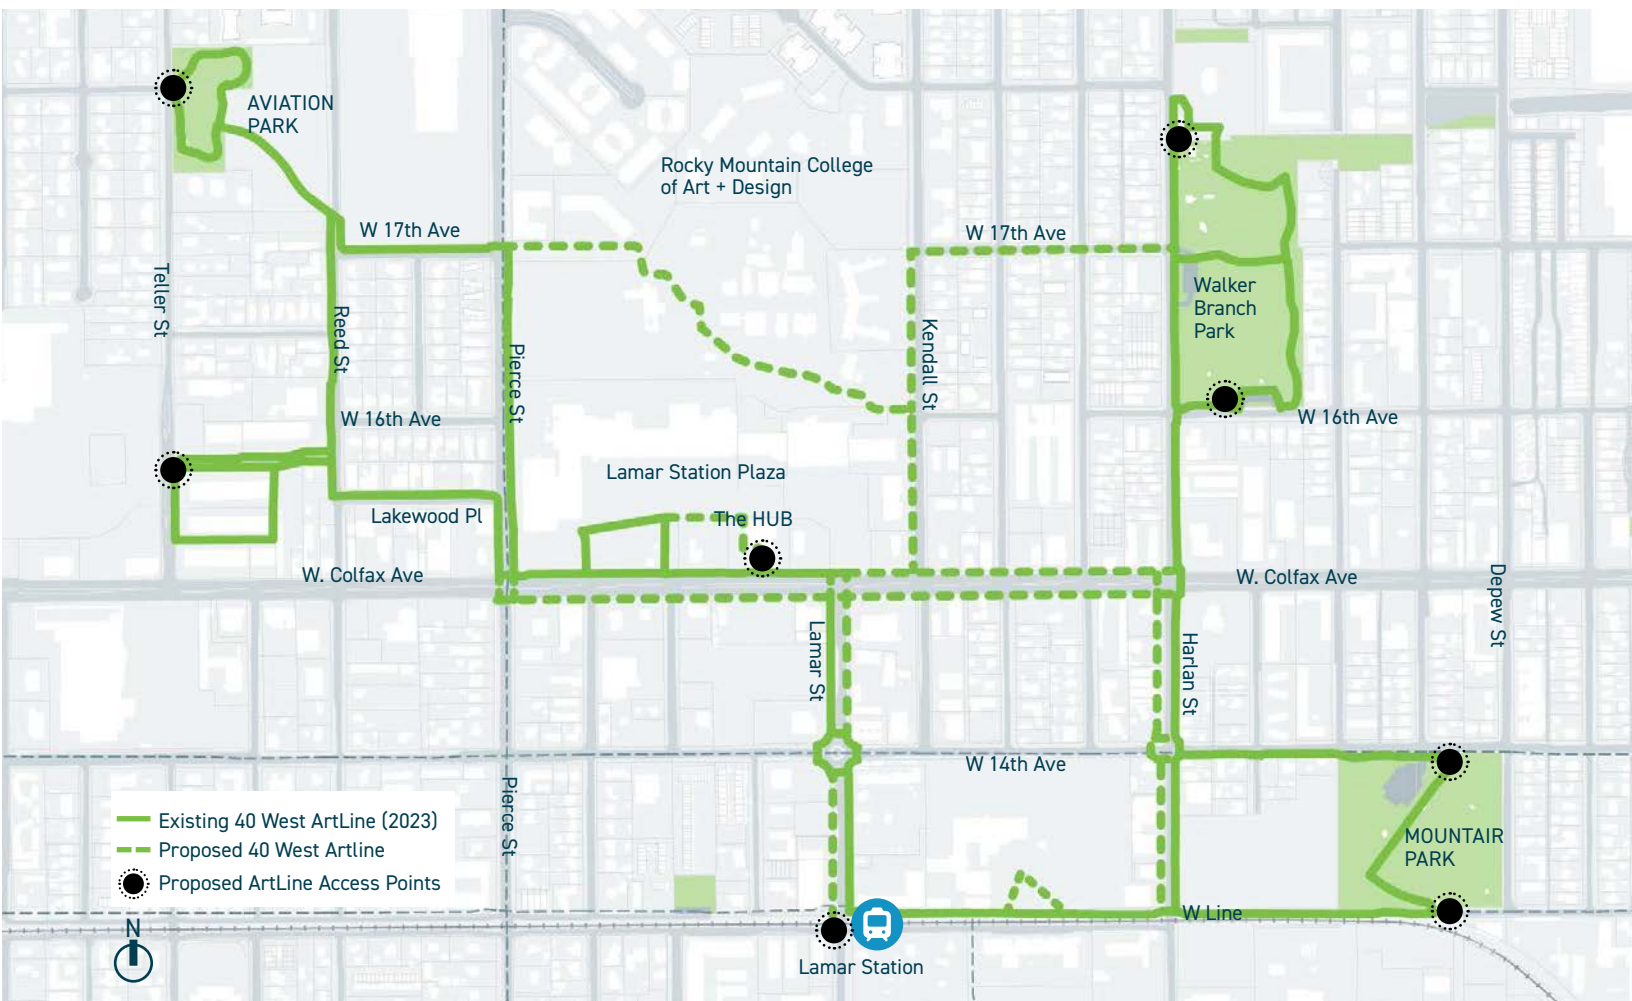

ArtLine Segments + Priority Projects Overview

To create the smaller sub-loop ArtLine segments and celebrate the unique character areas and assets along the route, the Framework Plan identifies six different segment areas, each with its own special features, adjacent land uses, parks or public spaces, and relationship to existing neighborhood amenities. These segments can be experienced individually and work together to feature a diverse range of creative and artistic opportunities which will create a continuous ArtLine experience that is dynamic and supports the neighborhood context.


The six segments, as illustrated on the map, include:

- Aviation Park - [page 24](#)
- Colfax Core - [page 30](#)
- Lamar Street - [page 36](#)
- Mountair Park - [page 40](#)
- Walker-Branch Park - [page 44](#)
- Rocky Mountain College of Art + Design (Future) - [page 50](#)

Details for each of these segments are described on the following pages and include:



- Existing Character and Opportunities
- Segment Vision, Recommendations, and Concept Designs

40 West ArtLine Segments Map

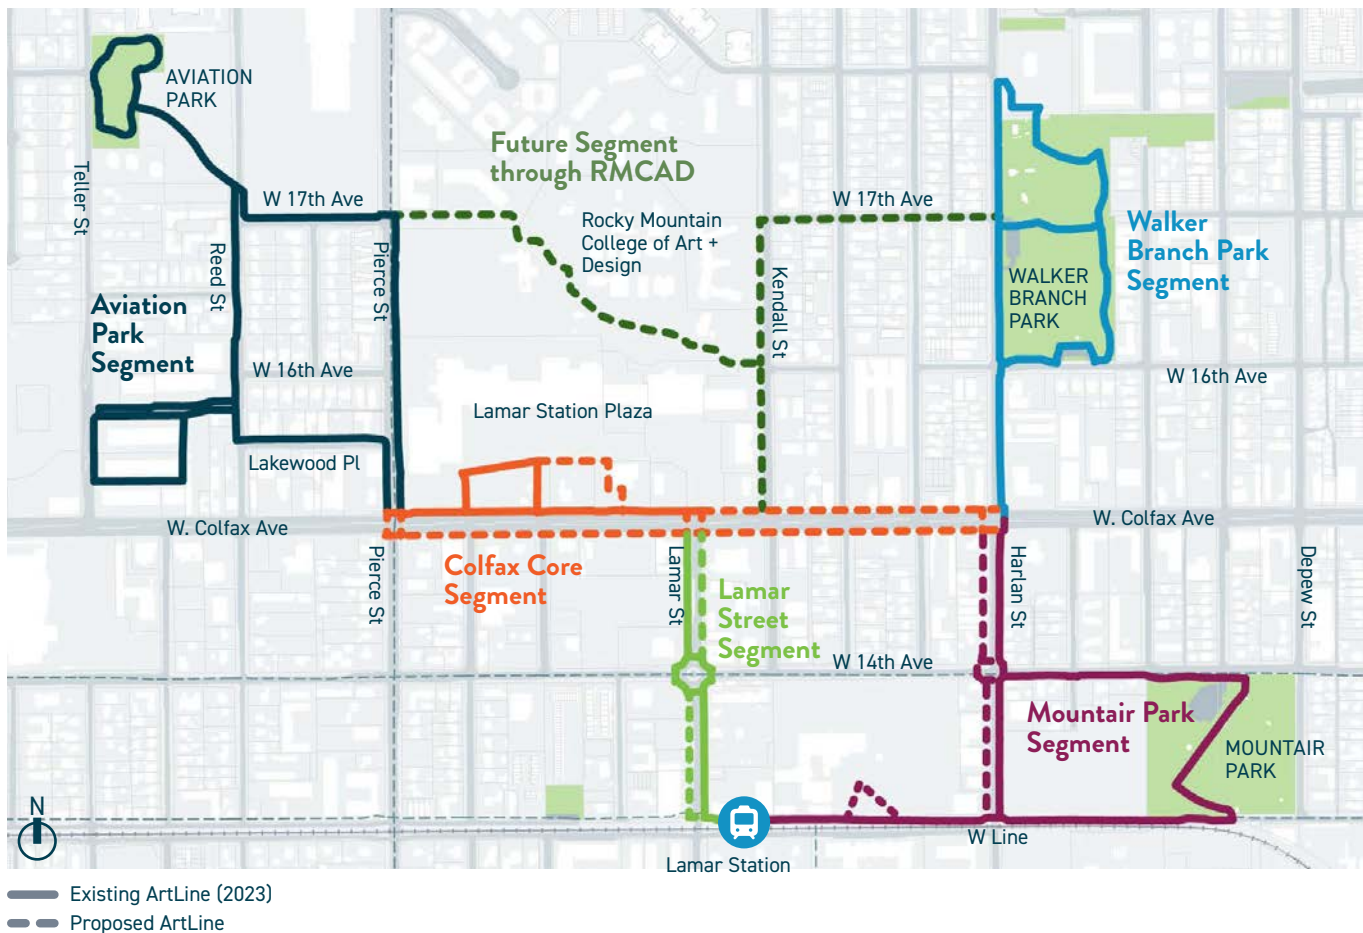

Additionally, three Priority Projects are described in detail in the Segments where each project is located. These Priority Projects were identified based on community and stakeholder input as areas to focus on first to enhance the ArtLine's identity and user experience and to showcase what the entire ArtLine experience can be. Project partners should focus on identifying funding, tools, and partnerships to implement the Priority Projects as soon as possible.

40 West ArtLine Priority Projects

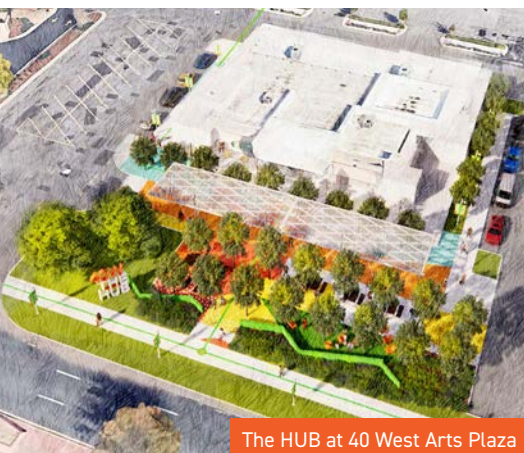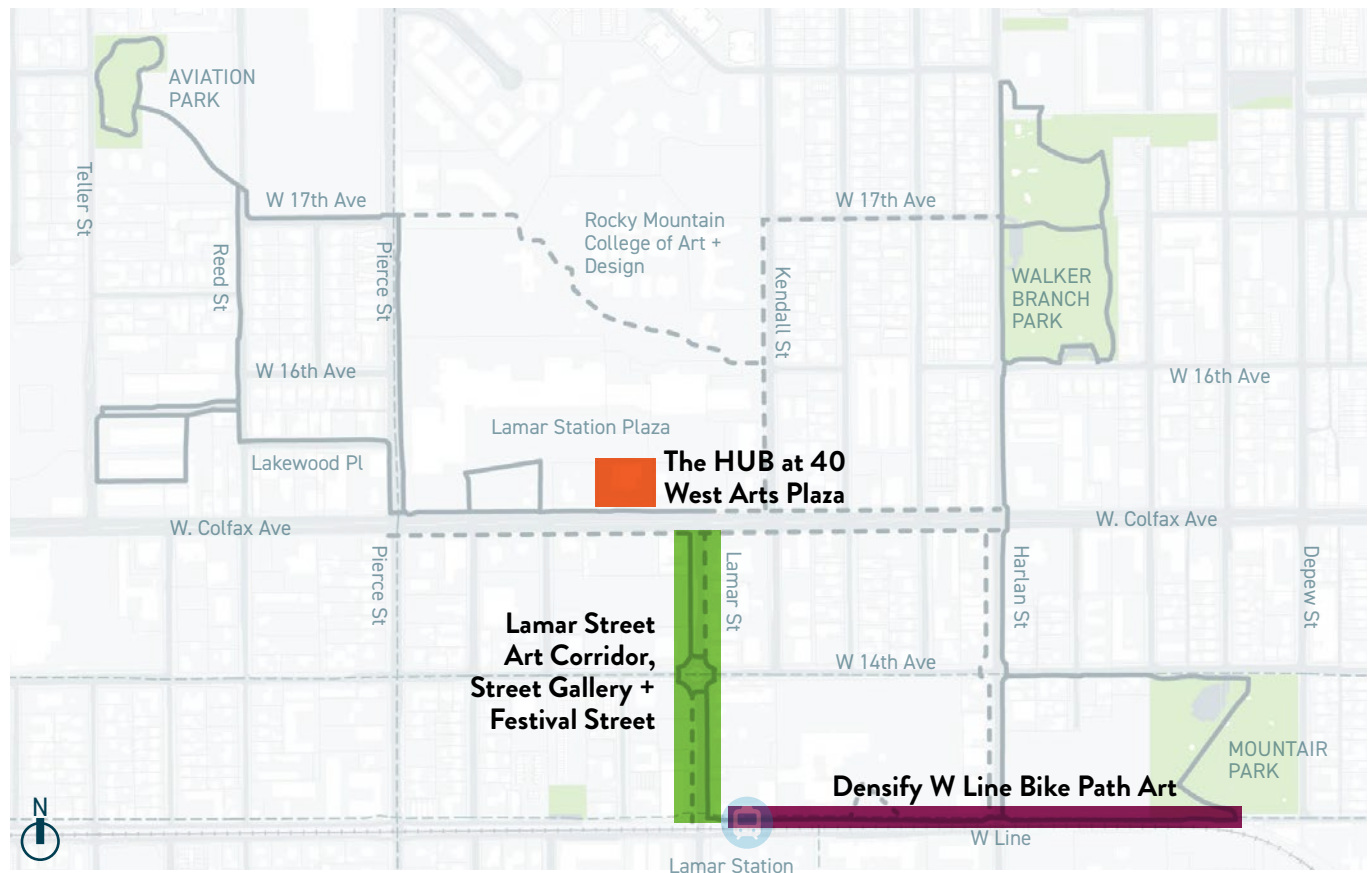

Aviation Park


Existing Character and Opportunities

The Aviation Park segment encompasses the northwestern section of the ArtLine. The park was once the site of the former Aviation Country Club, a social club for WWII pilots and other aviation personnel in the 1950s. Prior to that it was the Broadmoor Country Club, which hosted big name entertainers like Lawrence Welk. It was developed as a Lakewood park in 2005.

The character of this segment varies from single family residential homes, including some multifamily residential, to commercial, light-industrial, and mixed uses closer to West Colfax Avenue. There are some larger institutional uses along the north and east sections of the segment that include the Colorado Department of Revenue building and Rocky Mountain College of Art + Design (RMCAD), where the route passes the main entry of the historic campus along Pierce Street. Just north of RMCAD is the Residences at Creekside which is owned and operated by Metro West Housing Solutions and offers affordable apartments to seniors in the community.

The park serves as a major anchor for the segment by featuring some of the earliest ArtLine public art installations. The areas near West Colfax Avenue have embraced local artists and creative industries by creating a collection of galleries and creative businesses along West 16th Avenue, Reed Street, and Teller Street. Lakewood Place contains an eclectic mix of uses and has been activated with temporary art in the past. It's an important link between galleries and creative businesses in the west part of the ArtLine to the HUB at 40 West Arts and destinations to the east.

The public realm and mobility infrastructure in the Aviation Park segment is lacking consistency with several unimproved streets due to the period that the area developed and the historic lack of emphasis on pedestrian and bicycle infrastructure. In many areas, the streets lack sidewalks and street trees, and do not meet current city public roadway standards. Building and land uses along each street also affect the character of the streets. This includes substantial areas of surface parking, asphalt paving, unobstructed access to commercial businesses, and established landscaping and mature trees on private property in the residential areas. Of the two major north-south streets in this segment, the only area with a continuously improved sidewalk and landscape treatment is the east side of Pierce Street, which was completed in 2016 with Community Development Block Grant funds. The remaining three frontages along the two major north-south streets either have substandard sidewalks or are missing them completely. Recent ArtLine crosswalk improvements at 17th Avenue and Pierce Street and Aviation Park and Reed Street, funded through CDOT Revitalizing Main Streets grants, facilitate safer access between the park and areas to the east.

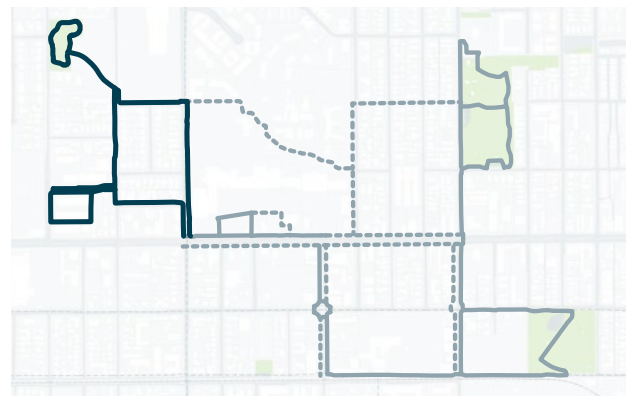

Aviation Park Segment Map



Aviation Park entry sign on Teller St



Sculpture art, *Unearthed Plates* by PUNCH, within Aviation Park



Ground mural, *Aztec Maze* by Katy Casper and *Story Totem* by Nestor Fedak with *Hidden Dinosaur* art panels by Michelle Wolins, at Teller St and 16th Ave



Wall mural, *Legilimens* by Birdcap and *Story Totem* by Nestor Fedak, along Pierce St



Reed St and 40 West Arts creative businesses



Ground mural, *Pollinator Path* by Charlotte Ricker, at 17th Ave and Pierce St

Segment Vision, Recommendations, and Concept Designs

The Aviation Park segment concentrates on **improved mobility and connections and creating programming and destinations**. The segment will utilize the larger open spaces near the park while transitioning to the industrial and commercial character closer to West Colfax, with the two major streetscapes along Reed Street and Pierce Street acting as primary connections. The varied character areas inspire different approaches to each part of the segment ranging from opportunities for land art and large sculptures near the park to creative lighting, gathering spaces, murals, fence art and integration with the business near Colfax.

Key Concepts

1 State-Owned Parcel Improvements

- a. Create a larger land art experience by adding new large-scale installations within the state-owned parcel on the west side of Reed Street. This expanse of unimproved natural area provides ample space for new installations to allow visitors and residents to connect with the natural environment and create a sense of discovery, exploration, and contemplation through the expression of new forms of land art.
- b. Integrate an artistic intervention or creative surface treatment within the path that connects Reed Street to Aviation Park to let people know they are on the ArtLine.

2 Activate Aviation Park Art Pedestals

- a. Activate and repurpose the existing pedestals near the playground with art pieces with lighting or family-friendly elements to make people feel comfortable and bring color to the area.
- b. Consider implementing a rotating mural program with artists, students, and community members to create dynamic art pieces on the pedestal bases.

Public Art & Creative Placemaking Strategies



Improve
Mobility and
Connections



Create
Programming
and Destinations

3 17th Avenue Sculpture Gardens

- a. Implement a sculpture garden along 17th Ave in the park area on the north side of the road between Reed Street and Pierce Street in the Colorado Department of Revenue property.
- b. Capitalize on this area's natural setting and mature trees to introduce large outdoor sculptures and small-scale land art that can be experienced as users walk or bike along 17th Ave.


4 Reed Street Utility Art

- a. Utilize the existing 4-5 utility streetlight poles as a canvas for creative and artistic expression along the street. Work in partnership with Xcel to explore artistic treatments in the form of painted murals, yarn wrapping, or other forms of creative and colorful wraps that can be applied to the existing poles to test new placemaking ideas and bring more artistic identity to Reed Street.

5 Reed Street Mobility Improvements

- a. Implement mobility improvements on Reed Street, first along the west side and eventually on both sides of the street, including curb and gutter, new sidewalks, and a landscaped tree lawn to improve pedestrian comfort and safety.
- b. Incorporate artistic and/or ArtLine branded crosswalk treatments with street crossings.

Aviation Park Segment Framework Diagram

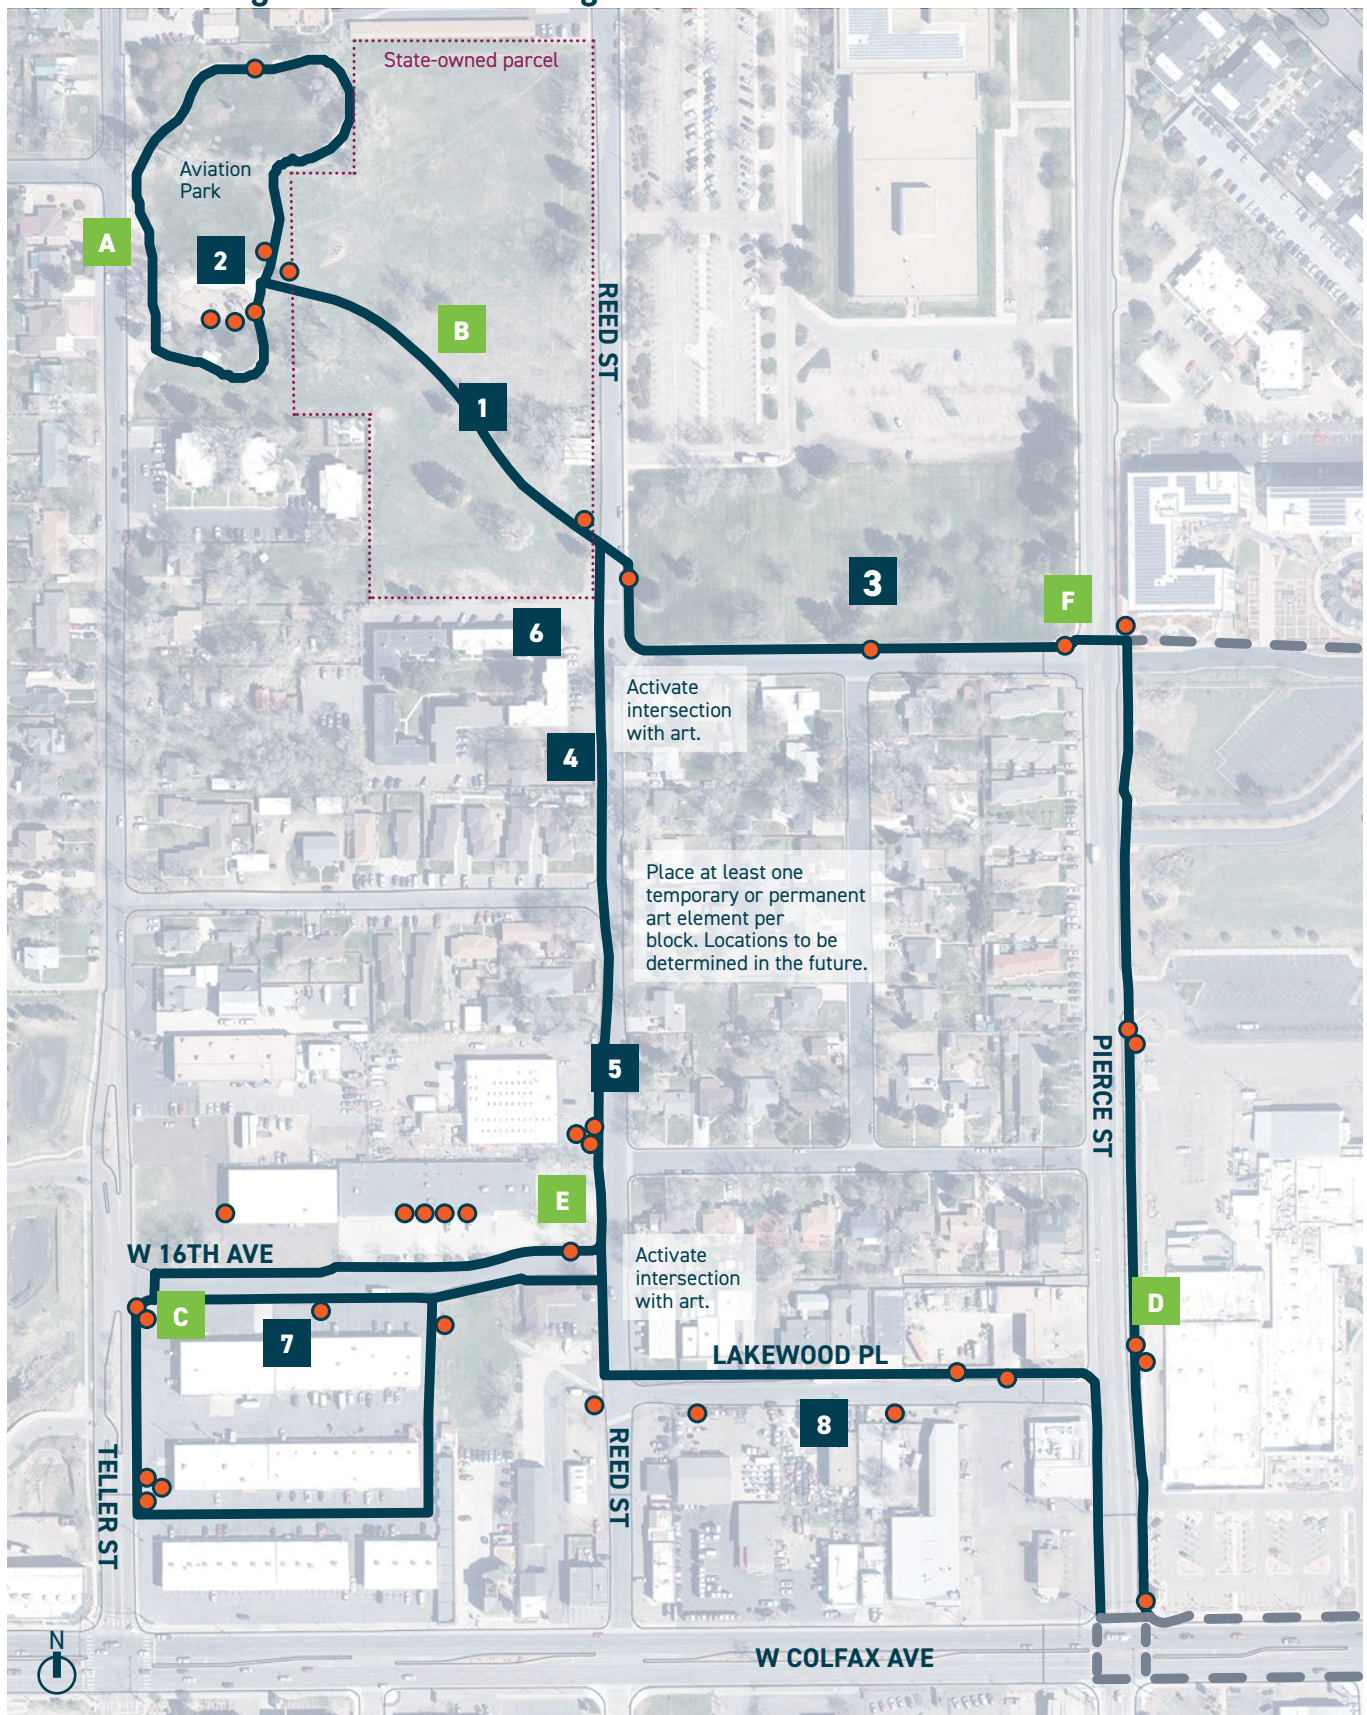

- Existing Art (temporary and permanent as of 2023)
- Existing ArtLine (2023)
- Existing Character Images
- Key Concepts

6 Reed Street and 17th Avenue Intersection Improvements

- Add artistic and/or ArtLine branded crosswalk to connect north-south across 17th Avenue.
- Add artistic and/or ArtLine branded crosswalk to connect east-west at the north and south portions of the intersection to connect across Reed Street and consider raised intersection to slow traffic.
- Retain the existing mid-block crosswalk between 17th Avenue and 18th Avenue.
- Utilize this intersection as an opportunity to create a more welcoming connection into the state-owned parcel adjacent to Aviation Park.

Concept of Reed St and 17th Ave Intersection Improvement



7 16th Avenue Streetscape and Creative Business Area

- Create an enhanced public realm experience using ground murals and markings to connect doorways to new streetscape improvements.


Concept of W. 16th Ave Streetscape Improvement



8 Lakewood Place Mural and Lighting Experience

- a. Utilize creative lighting, fence art, and murals to create a destination placemaking experience and strong connection between gallery hubs in the 40 West Arts District.

Concept of Reed Street Area Improvements

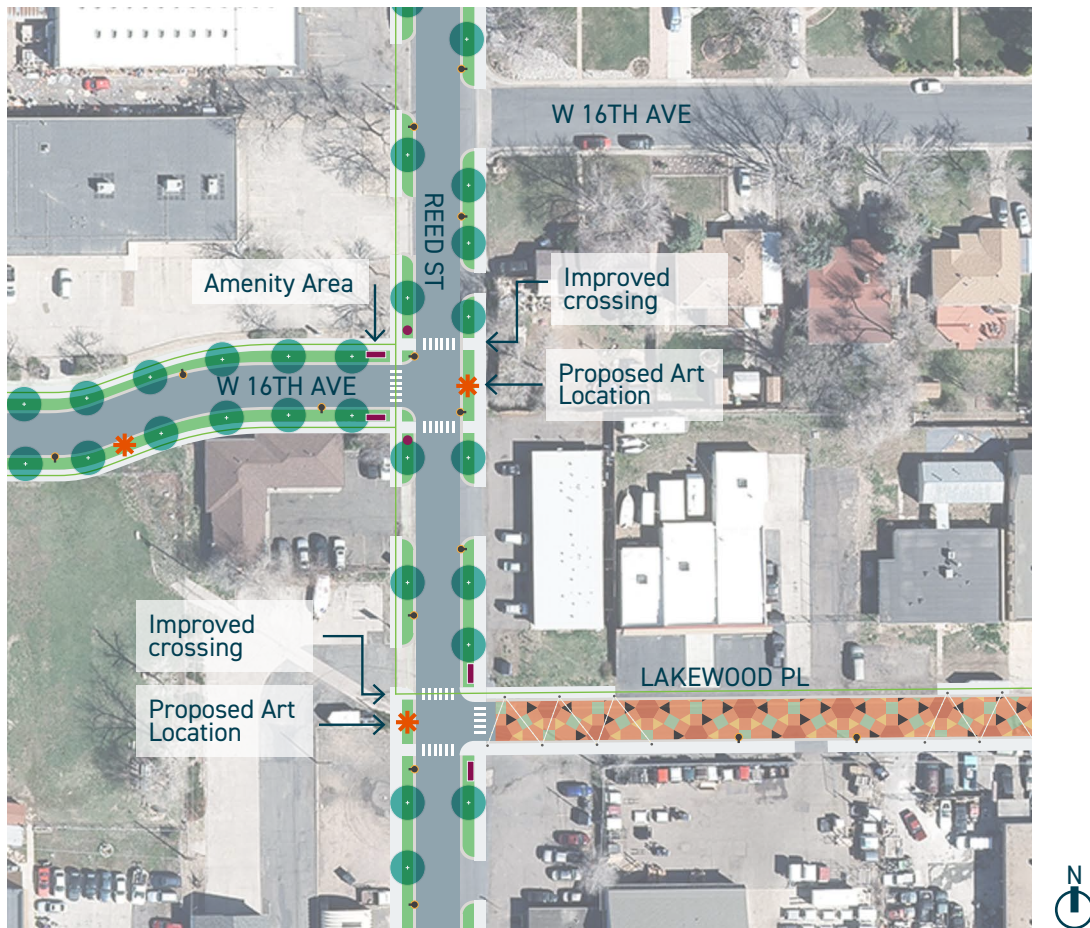


Colfax Core

Existing Character and Opportunities


The Colfax Core segment of the ArtLine has the greatest visibility to attract potential visitors and encompasses West Colfax Avenue from Pierce Street to Harlan Street. Lamar Station Plaza anchors this segment with the HUB at 40 West Arts and businesses like WestFax Brewing Company, Arc Thrift Store, and Casa Bonita. West Colfax Avenue has a rich history, once known as the Golden Road and serving as the primary road to connect Denver and Golden. When West Colfax Avenue was paved in 1932 it became part of the transcontinental US Highway 40. In the 1950s the area was populated with dozens of motels. During the 1960s and 1970s West Colfax Avenue started providing services and housing residents, including increasing numbers of immigrants. Today, the character of this segment is primarily commercial and West Colfax Avenue still operates as a primary arterial road, with three travel lanes in both directions currently.

The existing public realm is uncomfortable for pedestrians with many missing or inadequate sidewalk areas and paved tree lawn areas that slope toward the road on the north side of West Colfax Avenue. There is a lack of street trees and vegetation and surface parking lots that directly abut the sidewalk and pedestrian area. For the thousands of people traveling West Colfax each day in a vehicle, there is no indication that you are arriving at the ArtLine as you drive through the Colfax Core segment. However, the planned West Colfax Avenue Safety Project will transition one travel lane in each

direction to improve safety and aesthetics by providing continuous detached sidewalks and areas for landscaping and placemaking, which is a priority for the community. Significant opportunities exist in the next few years to enhance the entrance into the ArtLine and this segment of the route with the Safety Project. Notably, the intersection of Colfax Avenue and Lamar Street is envisioned as a key focal point and gateway entrance opportunity. Also, Casa Bonita re-opened in 2023 under new ownership and with significant renovations. It's expected to attract more than a million visitors annually, which provides exciting opportunities to build more awareness and visitorship for the ArtLine and can help attract other new creative uses and businesses to Lamar Station Plaza to create a central hub and destination on the ArtLine.

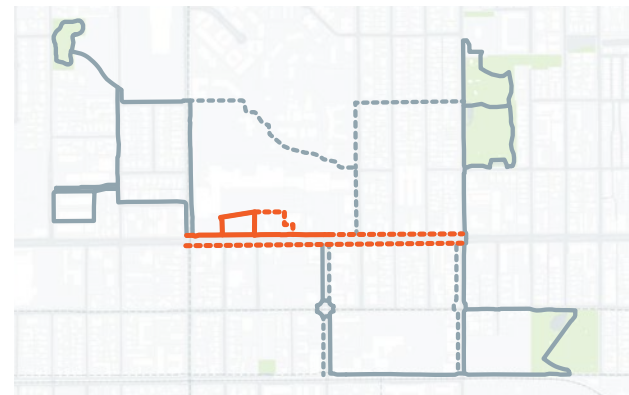

Colfax Core Segment Map

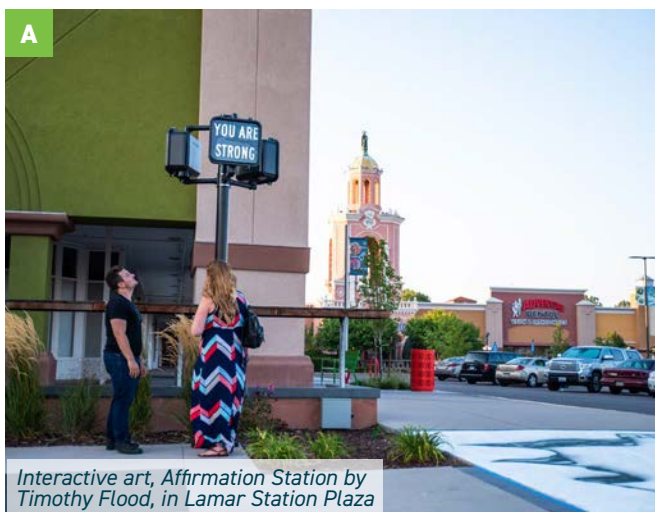

Interactive art, Affirmation Station by Timothy Flood, in Lamar Station Plaza



Community celebration at The HUB at 40 West Arts in Lamar Station Plaza



Story Totem by Nestor Fedak with Hidden Dinosaur art panels by Michelle Wolins, along Colfax Ave



Ground mural, Rainbow Road Chroma Code by Katy Casper, in Lamar Station Plaza

Segment Vision, Recommendations, and Concept Designs

The Colfax Core segment concentrates on **densifying public art, integrating with development, improved mobility and connections, creating programming and destinations, and emphasizing a sense of identity.** The segment will become the front door for the ArtLine, announcing arrival to the route for the diverse variety of users along West Colfax. The segment will feature an ArtLine experience on both sides of the street and a new public space and flexible performance and event area at the HUB at 40 West Arts. The segment will also feature a signature public art gateway piece at the intersection of Lamar Street and West Colfax Avenue and opportunity for additional art installations along the improved streetscape.

Public Art & Creative Placemaking Strategies



Densify Public Art



Integrate with Development



Improve Mobility and Connections




Create Programming and Destinations



Emphasize Sense of Identity

Colfax Core Segment Framework Diagram

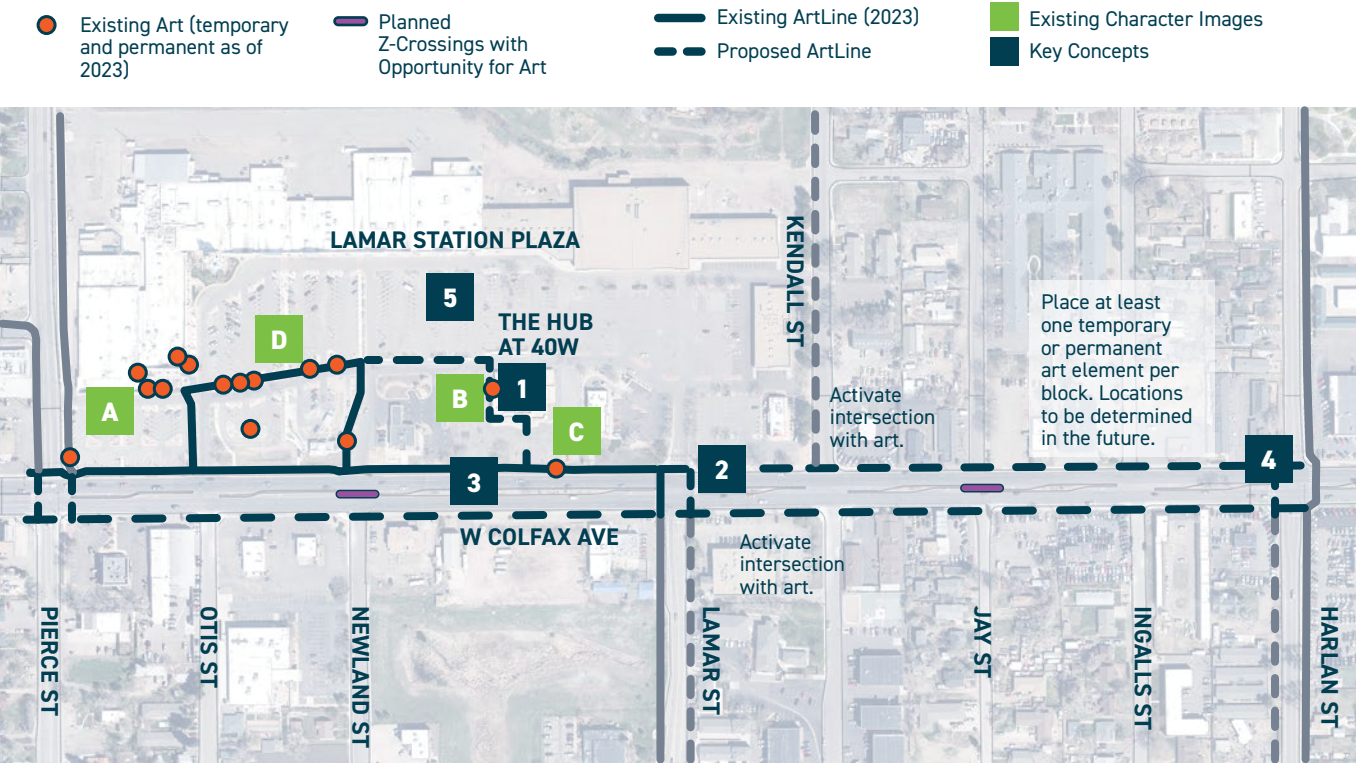

Key Concepts

1 The HUB at 40 West Arts Plaza

*PRIORITY PROJECT

- a. Create, support, and fund a destination public space that is adaptable for events, performances, rotating art, and everyday gathering.
- b. Explore hiring artists to work with community members to install ground murals on the plaza space as a near-term investment. Consider thermoplastic murals as a longer-term investment.
- c. Utilize this plaza to establish a highly visible front door for the 40 West Arts District along West Colfax Avenue by extending paving and/or ground murals to the sidewalk in order to integrate the plaza with the streetscape and invite people in.
- d. Locate the plaza between the south side of the building and West Colfax Avenue to enhance the entrance and showcase The HUB at 40 West Arts.
- e. Implement landscape improvements along the east side of The HUB building and consider creation of a small patio/outdoor dining space.
- f. Promote The HUB as a main entry point to the ArtLine and provide signage and visitor information about the route, ArtLine Audio Tours, artist info, and more.

One Concept of The Hub at 40 West Arts Plaza



2 Art Gateway at Lamar Street and West Colfax Avenue

- a. Commission a signature art gateway at the intersection of West Colfax Avenue and Lamar Street featuring a large public art piece, ideally activating all four corners, to announce you have arrived in the heart of the 40 West Arts District. The size, scale and visual impact of the art installation should make it a visually recognizable gateway and let people know they have arrived in the 40 West Arts District and at a key location along the ArtLine.

Gateway Concept Idea at Lamar St and W Colfax Ave



**For illustration purposes only*

3 Art Along West Colfax Streetscape

- a. Engage with planned improvements to the medians during Phase 1 of the West Colfax Safety Project. Consider fence art, improved lighting, Z crossing art installations, and landscape improvements.
- b. Implement improvements to the streetscape along both sides of the street during Phase 2 of the West Colfax Safety Project. Consider wayfinding elements, furnishings, improved lighting, and landscape improvements. Use art to highlight designated areas for pedestrians to safely cross West Colfax Avenue.

4 Improve North-South Crossings Along West Colfax Avenue

- a. Ensure north-south crossings of Colfax Avenue at Pierce, Lamar, and Harlan Streets are designed to prioritize and accommodate people walking or biking the ArtLine with short crossings and accessible ramps.
- b. Add public art and lighting, and clearly delineate the crosswalks with ArtLine branded pavement markings to make it a comfortable, safe, and welcoming experience.

5 Lamar Station Plaza Creative Hub

- a. Position Lamar Station Plaza as a destination with creative businesses, restaurants, and entertainment to build on the energy of Casa Bonita, the HUB at 40 West Arts, WestFax Brewery and other restaurants and galleries.
- b. Continue to work with Lamar Station Plaza owners and businesses on placemaking, art, and wayfinding along the ArtLine route within the shopping center.




Examples of public art in median and along the street. Art by Okuda San Miguel.

Lamar Street

Existing Character and Opportunities

The Lamar Street segment spans two blocks and connects Lamar Station Plaza and West Colfax Avenue with Lamar Station, a neighborhood-serving walk-up stop along the RTD West Rail Line. The street is considered a key spine of the 40 West ArtLine and is envisioned to be a focal point of the 40 West Arts District. The direct connection to public transit represents an opportunity to welcome regional visitors to the ArtLine and draw them to The HUB at 40 West and other area destinations. Lamar Street is a minor collector from 13th to 14th Ave and a local street from 14th to Colfax Ave with one lane of traffic in each direction and bike lanes. A roundabout at the intersection of W 14th Avenue and Lamar Street is home to the sculpture “Connected” by Christopher Weed, which honors the connectedness of the people and neighborhoods in the area. This area is characterized by a mix of uses, including industrial and makerspace uses as well as newer affordable and market-rate apartment developments and The Loop apartments, an older apartment building that was recently beautified with the Wild Urban Medicine murals by artist Katy Casper. Nearby future proposed developments, like The Brickyard, will put even more emphasis on the potential to activate this segment as a vibrant place.

Lamar Street has enhanced sidewalk and streetscape in two segments but is currently missing sidewalks along the west side of the street between 13th Avenue and 14th Avenue and along the east side of the street between 14th Avenue and West Colfax Avenue. It has many art and placemaking elements, including recently installed thermoplastic ground murals designed by 40 West Artist Charlotte Bassin, but there is potential to greatly enhance the public and private realm in the area and create a major sense of arrival to the ArtLine for visitors arriving from Lamar Station or from the W Line bike path.

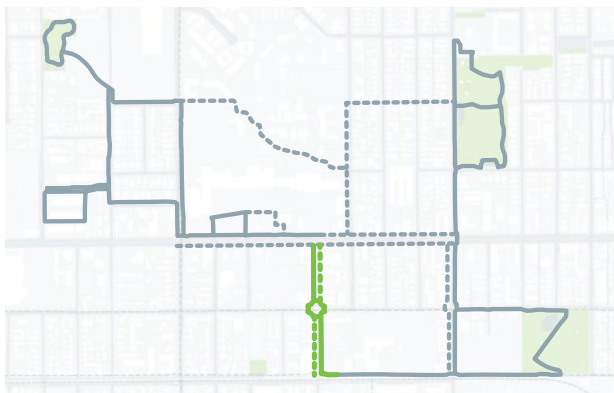

Lamar Street Segment Map



Segment Vision, Recommendations, and Concept Designs

Lamar Street will concentrate on **densifying public art, integrating with development, improved mobility and connections, and emphasizing a sense of identity.** This segment will become an outdoor art corridor and gallery framed by adaptively reused buildings and higher density mixed-use activities with numerous locations for public art, including individual pieces, sculptures, wall murals, and small pockets for people to gather and socialize. The street will be the focal point and main mixed-use neighborhood spine with a continuous design character and street-level activation, including gathering spaces, neighborhood-serving businesses, public art, and lighting. Lamar Street is envisioned to become a community destination, and the roadway could be temporarily closed off for festivals and community events. Future improvements along the street will enhance mobility and connectivity between the Lamar Station and areas to the north along the ArtLine. This segment also has the potential to be a welcoming and enhanced entrance to the future proposed Brickyard development to the east and creatively activated pedestrian walkways should be designed to connect the two areas.

Public Art & Creative Placemaking Strategies



Densify Public Art



Integrate with Development




Improve Mobility and Connections



Emphasize Sense of Identity

-  Existing Art (temporary and permanent as of 2023)
-  Existing ArtLine (2023)
-  Proposed ArtLine
-  Existing Character Images
-  Key Concepts

Lamar Street Segment Framework Diagram

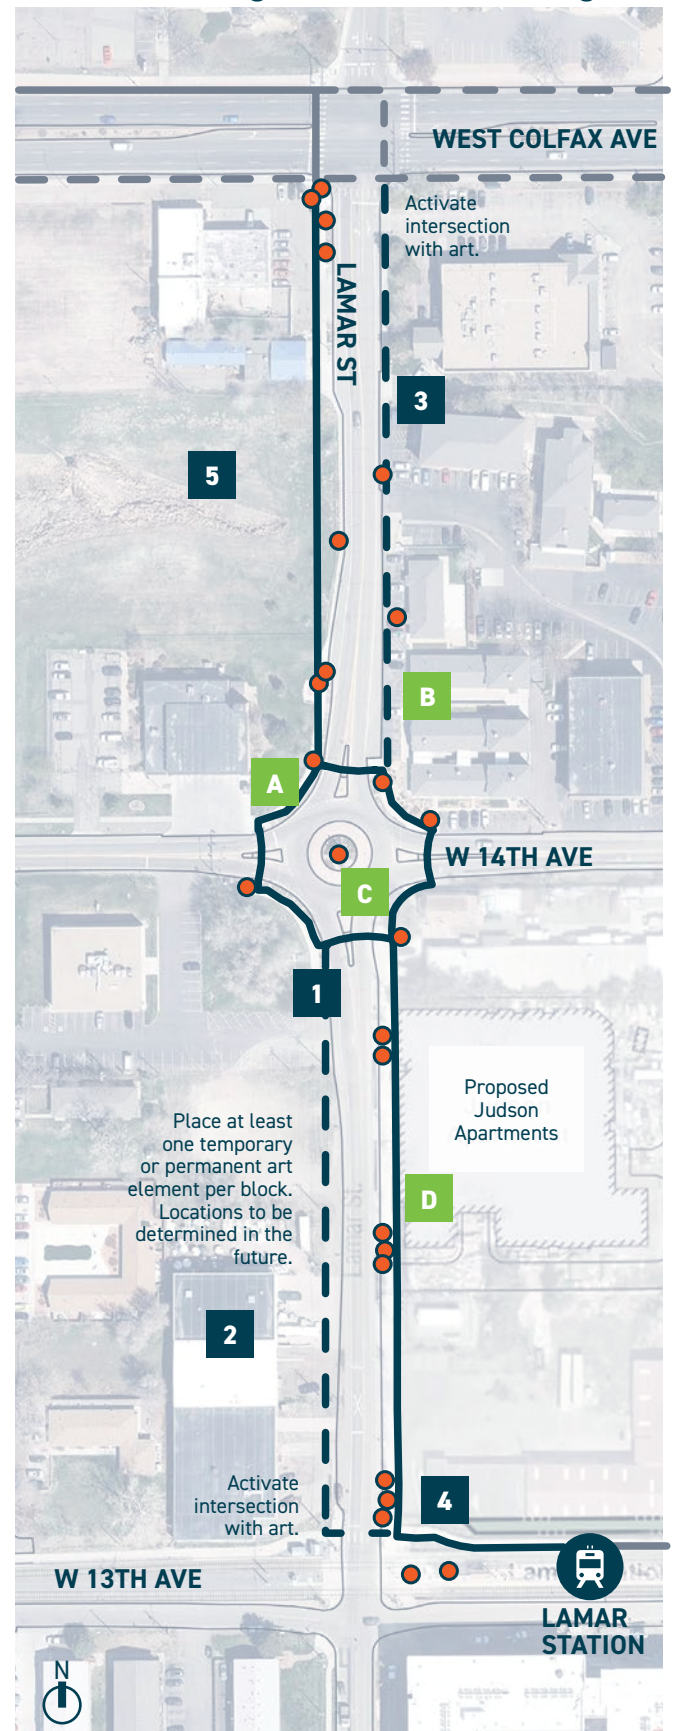

Key Concepts

1 Lamar Street Art Corridor, Street Gallery + Festival Street ***PRIORITY PROJECT**

- a. Create an outdoor art corridor or hallway experience that includes numerous locations for public art along both sides of the street.
- b. Integrate this street gallery approach with new developments and adaptive reuse by integrating public art on private property, buildings, or public realm enhancements.
- c. Support the creation of a well-lit and creatively enhanced pedestrian walkway/alleyway to connect Lamar Street to adjacent future redevelopment to the east.
- d. Encourage opportunities to create a “festival street” for block parties and temporary street closures for pop-up celebrations and events in partnership with local businesses and 40 West Arts.

Concept of Lamar Street Art Corridor



2 Art With Private Development

- a. Incorporate art and creative design features into new development as a part of the City of Lakewood's Enhanced Development Menu and ArtLine Design Standards & Guidelines to create a continuous art experience utilizing the facade and ground floor of buildings facing the street.
- b. Encourage art enhancements on existing buildings to help activate the street and provide interest.
- c. Support efforts to encourage adaptive re-use of existing buildings and new mixed-use buildings that provide neighborhood-serving businesses that help activate the street level and contribute to developing Lamar Street as a destination for the community.

3 Attractive and Complete Street

- a. Complete the missing sidewalk and streetscape segments with future grants or redevelopment to provide a safe and attractive connection on both sides of Lamar Street in this segment.
- b. Consider opportunities to prioritize active transportation and to improve comfort and safety for pedestrians and bicyclists with secure bike parking and other enhanced design elements.

4 Lamar Street Gateway

- a. Create an enhanced and improved vertical placemaking / wayfinding element near the station at 13th Avenue to be highly visible and welcome people to the ArtLine when they are arriving by light rail or on the W Line bike path. Consider a gateway element at or near the station.
- b. Utilize the existing 40W kiosk and bike station at 13th and Lamar to provide information about the ArtLine and events in the area and promote this as an entrance point into the ArtLine for visitors accessing the amenity from the W Line light rail.

5 Environmental Art Along Lamar Street

- a. Create an environmental land art experience in the storm water detention area to activate it as a passive recreational area along the ArtLine.
- b. Coordinate with the future North Dry Gulch drainage improvement project to incorporate the art into future designs.



Art should be included with private development



Examples of arrival gateway opportunities

Mountair Park

Existing Character and Opportunities

The prominent feature of this segment is Mountair Park, a 9-acre park at the intersection of 14th Avenue and Depew Street that slopes down to the W Line bike path and 13th Avenue. The park features a baseball field, picnic tables, playground, basketball court and a picnic shelter. The park is also home to Mountair Park Community Farm, a 1.5-acre organic vegetable farm in the south section of the park that was established in 2014 through a partnership between the City of Lakewood and the non-profit Sprout City Farms. The farm averages 10,000 pounds of food produced per year and works to provide access to fresh, healthy food for area residents and to be a gathering space for the community.

The ArtLine route travels through the park and connects to the other segments along Harlan Street and the W Line bike path. The surrounding land uses are primarily residential with some industrial, transit-oriented development and affordable housing along the south edge of the segment. The historic Loveland House is located on the west side of Harlan Street in this segment and is proposed to be restored and adaptively re-used as part of a boutique hotel project. The segment passes by the Lakewood Brick property, an historic industrial site that is proposed to be redeveloped as The Brickyard. This development is envisioned as a mixed-use community with residential, commercial, and community gathering spaces activated with art.

The public realm along Harlan Street within this segment is uncomfortable for pedestrians. There is an attached and narrow sidewalk along the east side of the street and a missing sidewalk along the west side of the street. Bike lanes are located on both sides of the street and the W Line bike path is a well-used local and regional route for walking and biking. There is an opportunity to emphasize the linear nature of the W Line bike path and the spirit of movement through kinetic artwork. There is also an opportunity to build on the existing art in the park, which includes Dermal Plate Gateway by PUNCH, one of the largest and most recognizable sculptures on the ArtLine, to create an exciting destination.




Sculpture art, Dermal Plate Gateway by PUNCH, within Mountair Park near W Line



Ground mural, Street Confetti by Sandra Fettingis, along the W Line bike path



Mountair Park Community Farm managed by Sprout City Farms and interactive musical instruments

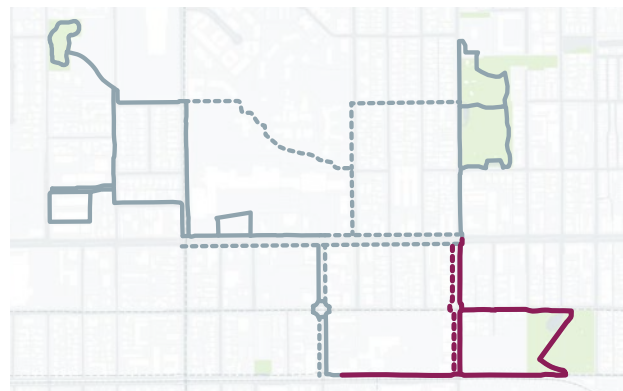

Mountair Park Segment Map

Segment Vision, Recommendations, and Concept Designs

The Mountair Park segment will concentrate on **densifying public art, integrating with development, improved mobility and connections, creating programming and destinations, and emphasizing a sense of identity**. The segment will be characterized by the integration of art in many forms, including larger sculptural pieces, land art, fence art, integration with Mountair Park Community Farm, new gateways, kinetic art, and the unique opportunity to connect to the planned Brickyard and Loveland House redevelopments.

Public Art & Creative Placemaking Strategies



Densify Public Art



Integrate with Development



Improve Mobility and Connections




Create Programming and Destinations



Emphasize Sense of Identity

Mountair Park Segment Framework Diagram

- Existing Art (temporary and permanent as of 2023)
- Existing ArtLine (2023)
- Existing Character Images
- Linear Art Activation
- Proposed ArtLine
- Key Concepts

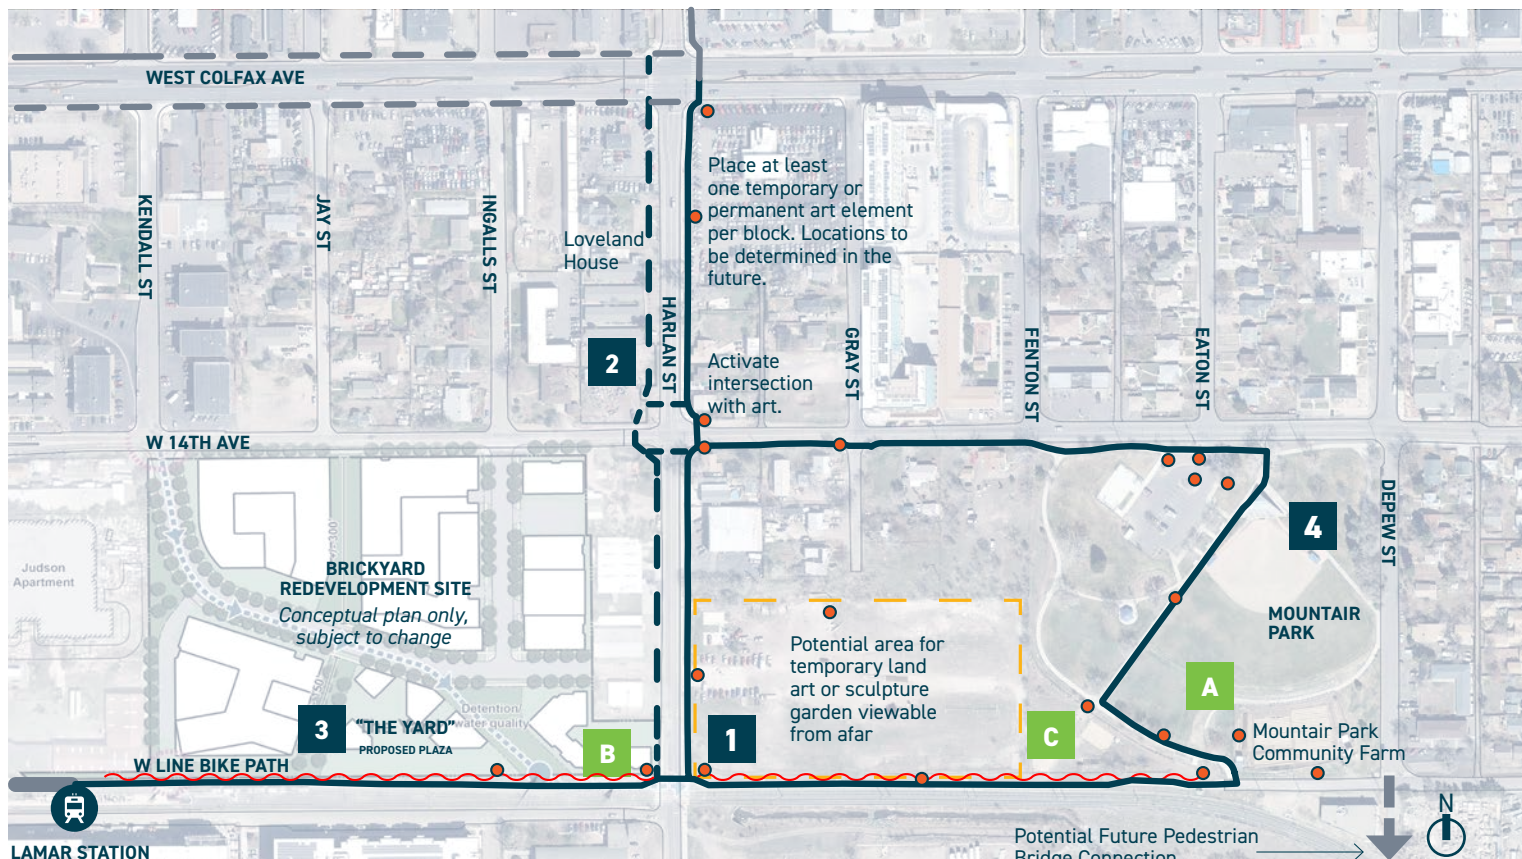

Key Concepts


1 Densify W Line Bike Path Art

*PRIORITY PROJECT

- Take advantage of the existing W Line bike path to create a linear art and public space experience along the RTD W Rail Line. Thousands of potential ArtLine visitors see the route from the W Line and the bike path and there's an opportunity to generate interest and excitement by adding more art to this area.
- Implement kinetic art, fence art, lighting, and banners to create a continuous artistic experience connecting Lamar Station to Mountair Park.
- Continue to coordinate with the owners of the vacant parcel at the northeast corner of Harlan Street and the W Line bike path to maintain existing art and add new temporary art elements.



Examples of linear kinetic art

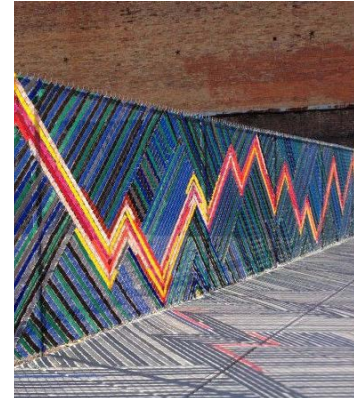

Examples of fence art

Concept of W Line Bike Path



2 Harlan Streetscape Improvements

- a. Create a more comfortable experience for pedestrians and bicyclists along Harlan Street with wider sidewalks, tree lawns, and more defined bike lanes.
- b. Partner with the future Loveland House redevelopment to connect the project to the ArtLine with enhanced art and placemaking experiences that honor the history of the site and neighborhood.
- c. Support opportunities to provide murals or other art and placemaking on existing commercial buildings along Harlan Street.

3 Brickyard Development Art + Community Gathering Spaces

- a. Coordinate with the developer to support integration of public art and performance spaces into the project adjacent to the ArtLine and create an attractive and highly visible access into the site from the ArtLine.
- b. Consider celebrating the connection to the new Brickyard redevelopment by allowing for a future ArtLine route through 'The Yard,' which is a new mixed-use plaza envisioned at the heart of the development.

4 Mountair Park Gateway Moments

- a. Implement gateway elements and enhance art and murals at Mountair Park Community Farm to strengthen its role as a major ArtLine destination.
- b. Utilize new park improvements in the northeast corner of the park to create a new gateway and public space featuring the ArtLine and a new public art installation.
- c. Add new public art installations in the form of land art or sculpture art to the park along the ArtLine route.
- d. Explore the opportunity for a new public space and flexible community plaza on 13th Avenue, and a future pedestrian bridge connection over the W Line light rail near the intersection of 13th Ave and Depew Street.
- e. Identify a location within the park to provide a welcoming entrance point to the ArtLine where visitors can park their vehicle or bicycle and find information about the ArtLine route, Audio Tours, and area information.

Concept of Proposed 14th Ave Gateway at Mountair Park




Walker-Branch Park

Existing Character and Opportunities

The Walker-Branch Park segment begins at West Colfax Avenue and continues north along Harlan Street to the Edgewater Civic Center and Library. The segment is characterized by the 13-acre community park that has views of downtown Denver to the east and the iconic RMCAD water tower to the west. The park provides a variety of recreation opportunities and gathering spaces, including a skate park, basketball court, two playgrounds, and grassy play fields. A future dog park is planned, along with other improvements in the recently completed Walker Branch Park Master Plan. The park and this segment of the ArtLine is unique, as portions are within both the City of Edgewater and the City of Lakewood's boundaries and collaboration between the jurisdictions is important.

According to the ArtLine Pedestrian and Bike Count 2021 Annual Report, Walker-Branch Park is one of the most visited locations on the ArtLine with high pedestrian activity and a diverse set of users. The report notes that Walker-Branch Park had the highest number of children under 5 and school-aged children. This makes it an ideal location for youth and family programming and interactive art. The park is already home to interactive and functional art, including Stranger Reduction Zone by Timothy Flood and Stegoskel by PUNCH. There are bike lanes on both sides of Harlan Street but the pedestrian experience along the street is uncomfortable and fractured due to narrow attached sidewalks and missing sidewalks in some sections on the west side of the street.

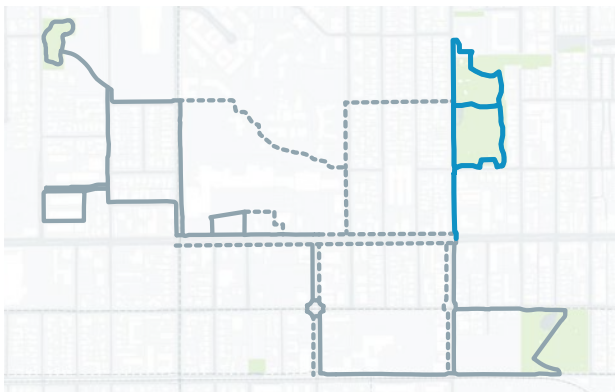

Walker-Branch Park Segment Map



Sculpture art, Stegoskel by PUNCH, within Walker-Branch Park



Ground mural by Brian Raymond Simmonds within Walker-Branch Park near the Edgewater Civic Center during winter



Story Totem by Nestor Fedak with Hidden Dinosaur art panels by Michelle Wolins, along Harlan St

Walker-Branch Park Segment Framework Diagram

Segment Vision, Recommendations, and Concept Designs

The Walker-Branch Park segment will concentrate on **densifying public art, improved mobility and connections, creating programming and destinations, and emphasizing a sense of identity.** This segment will celebrate the largest destination park on the ArtLine by building on the existing public art and offering new opportunities to expand the public art experience into the beautiful park setting in coordination with future park and mobility improvements. The ArtLine begins along Harlan Street before continuing into the park where users experience ground murals, interactive art installations, functional art, a new outdoor performance area, and a direct connection to the Edgewater Civic Center and Library building to the north. In addition, improvements to the 17th Avenue and Harlan intersection create a colorful pedestrian-friendly connection as users continue west along 17th Avenue to RMCAD. Improvements to the 18th Avenue and Harlan intersection will help welcome users into the ArtLine and Civic Center from the west.

Public Art & Creative Placemaking Strategies



Densify Public Art



Improve Mobility and Connections



Create Programming and Destinations



Emphasize Sense of Identity

● Existing Art (temporary and permanent as of 2023)

— Existing ArtLine (2023)

■ Existing Character Images

■ Key Concepts




Key Concepts

1 17th Avenue and Harlan Street Intersection

- Create a pedestrian-friendly crossing and implement safety measures at this intersection.
- Consider making this crosswalk raised to calm traffic.
- Incorporate artistic and/or ArtLine branded crosswalk treatments with the new crossing.


Concept Diagram of 17th and Harlan Intersection

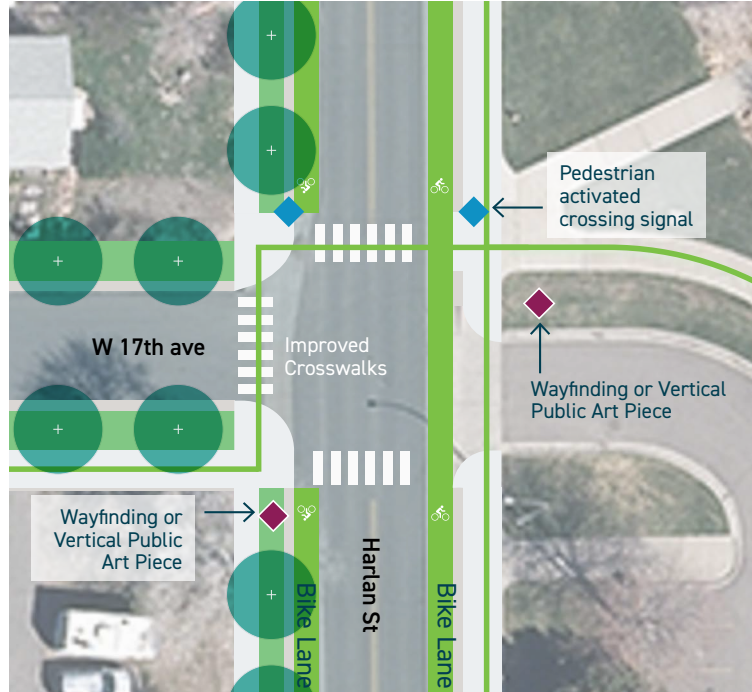

2 Harlan Streetscape Improvements

- Implement sidewalk and tree lawn along Harlan Street between West Colfax Avenue and 16th Avenue.
- Create art nodes with ground murals, areas set aside for small art installations, and consistent elements like benches and lighting.
- Consider protected bike lanes and pedestrian bulb outs at crossings.

Concepts of ArtLine Visual Indicators at Public Art Location Along the Street

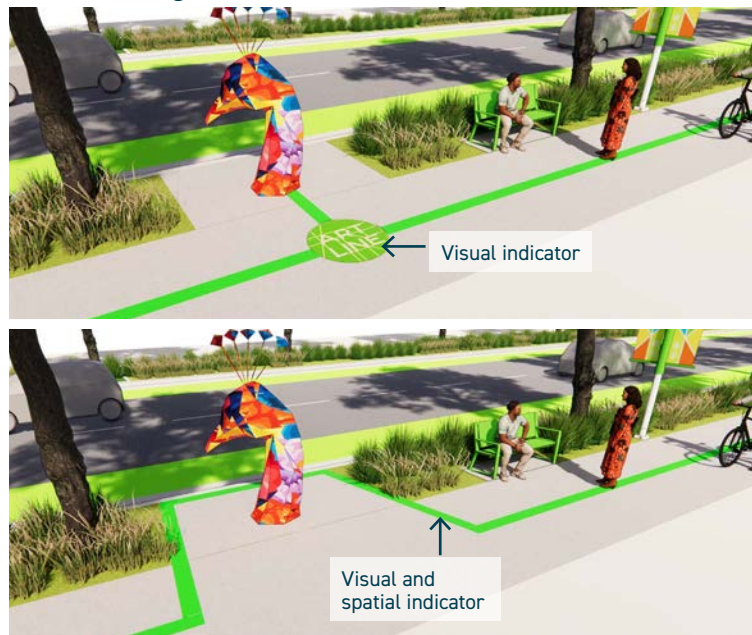


3 Walker-Branch Park Art

- a. Reinforce Walker-Branch Park as a key ArtLine destination by ensuring existing art is well-maintained and selectively adding new interactive and functional art with future projects, including the new dog park and future crosswalks on Harlan Street.
- b. Implement large new artistic murals by local artists on the existing basketball courts to create a highly graphic and playful entry into Walker-Branch Park from W 17th Ave.
- c. Consider the addition of a “permission wall” near the skate park, seasonal lighting, and temporary art elements to activate the park.
- d. Implement an improved gateway and ground mural at the park entry at the corner of Harlan Street and West 16th Avenue.

4 Harlan Street and 18th Avenue Crossing

- a. Create a pedestrian-friendly crossing and implement safety measures at this intersection, as it is a key access point to the ArtLine and the Edgewater Civic Center and Library from the north and west.
- b. Incorporate artistic and/or ArtLine branded crosswalk treatments with the new crossing.

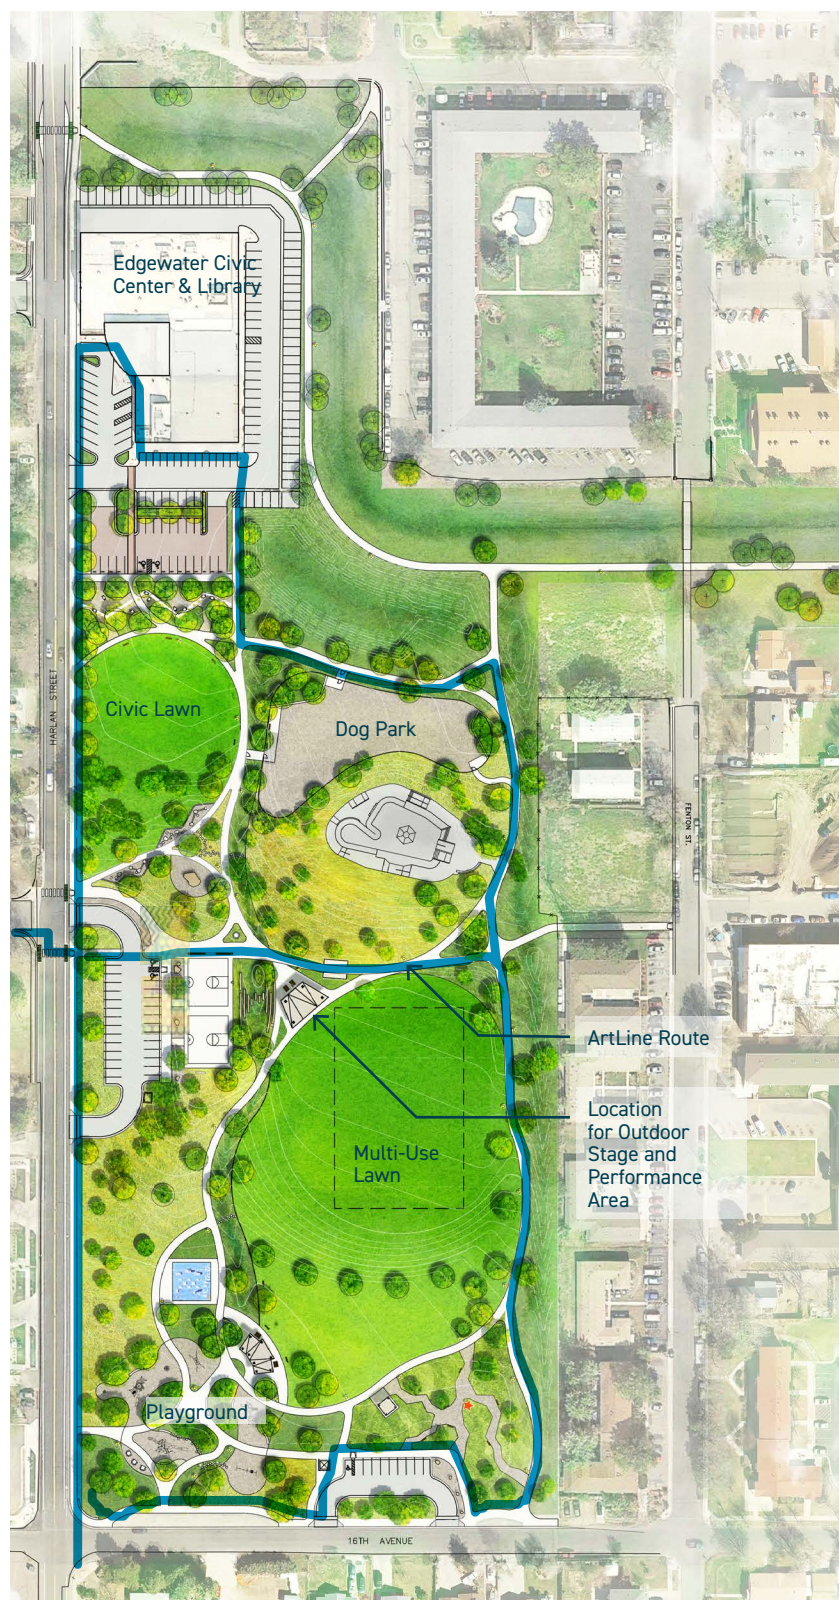

Concept plan rendering from Walker-Branch Park Master Plan



Concept rendering from Walker-Branch Park Master Plan of new outdoor space and flexible lawn adjacent to Edgewater Civic Center, and potential program events in partnership with Edgewater Public Library. For illustrative purposes only

5 Opportunities for Programming, Gathering and Events

- a. Create a new outdoor space and large flexible lawn for performances and events in collaboration with the City of Edgewater.
- b. Partner with Edgewater Public Library to cross-program events on the ArtLine, with a focus on youth and families.
- c. Celebrate the future dog park as the only one on the ArtLine and incorporate art and placemaking elements when it's developed so it stands out as a unique and memorable gathering space for visitors (and their four-legged friends!)
- d. Explore partnerships with the Filipino-American Community of Colorado Center, which is directly north of the Edgewater Civic Center and Library. This community center represents an opportunity to partner with organizations that will increase access to the ArtLine for visitors and residents of diverse backgrounds.



Concept rendering from Walker-Branch Park Master Plan illustrating new areas for ArtLine sculptures and the outdoor performance and event space. For illustrative purposes only

6 Walker-Branch Park Gateway and Wayfinding

- a. Implement wayfinding and placemaking elements in Walker-Branch Park to draw visitors from Edgewater into the ArtLine and the 40 West Arts District.
- b. Partner with the City of Edgewater and the Edgewater Library to promote the Civic Center location as a key entry point to the ArtLine where visitors can park and find ArtLine information both outside and inside of the Civic Center building.


Rocky Mountain College of Art + Design (Future)

Existing Character and Opportunities

This proposed new segment would extend the ArtLine route from the Aviation Park segment on the west through the beautiful and historic Rocky Mountain College of Art + Design (RMCAD) campus to the Walker-Branch Park and Colfax Core segments to the east and south. Implementation of this future segment will require close coordination with RMCAD and adjacent property owners to determine the final design and alignment. The route is envisioned to start near Pierce Street and 17th Avenue and continue through the campus to Kendall Street on the east. To complete the new segment, the proposed route connects to Walker-Branch Park along the west side of Kendall Street and south side of 17th Avenue or to the Colfax Core segment by traveling south along the west side of Kendall Street. The new segment would allow ArtLine visitors to enjoy the unique RMCAD campus and would provide area residents and visitors a more direct east-west connection from Aviation Park to Walker-Branch Park.

RMCAD is a private for-profit art school, and the 23-acre campus is a designated historic district on the National Registry of Historic Places. The campus was initially home to the Jewish Consumptives' Relief Society in the early 1900s, shifting to become the American Medical Center in the 1950s. In 2002, RMCAD purchased the property and works to maintain the unique grounds which include gardens, lawns, the iconic RMCAD water tower, and historic structures.

As a private school the property has been inaccessible for residents and visitors to the ArtLine. A desire has emerged for residents to the west of RMCAD to be able to directly access Walker-Branch Park, specifically seniors who live at the Residences at Creekside, a Metro West Housing Solutions (MWHS) property. Additionally, allowing access through the property will give residents and visitors alike the ability to enjoy this beautiful institutional space and learn about and celebrate its rich history.

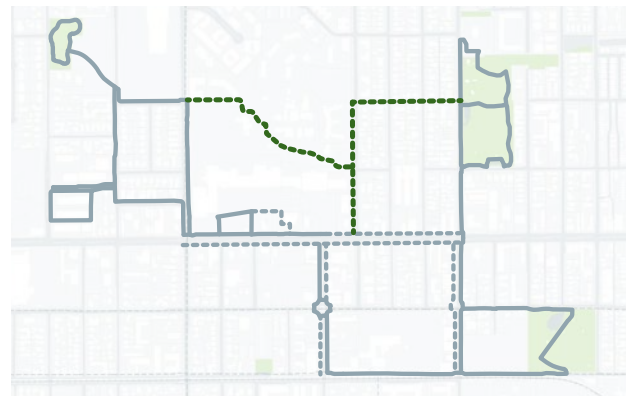

RMCAD Segment Map

Segment Vision, Recommendations, and Concept Designs

The proposed RMCAD segment concentrates on **improved mobility and connections and creating programming and destinations**. This segment will connect Walker-Branch Park to Aviation Park by featuring a new connection through the heart of the RMCAD campus. The route includes two linear street connections with ground murals, wayfinding, and pedestrian crossing improvements before entering the campus and bringing visitors through RMCAD's sculpture garden and proposed outdoor performance area located adjacent to historic campus buildings.

Public Art & Creative Placemaking Strategies



Improve
Mobility and
Connections




Create
Programming and
Destinations

Key Concepts

1 ArtLine Connection Through RMCAD

- Collaborate with RMCAD, MWHS and Lamar Station Plaza to fund through grants or other means the design and implementation of a future ArtLine route that is envisioned to connect through or adjacent to the Residences at Creekside property, past the historic buildings and sculpture garden, and exiting onto Kendall Street behind Lamar Station Plaza.
- Explore an alternate route through RMCAD that does not pass the sculpture garden and instead aligns with 17th Avenue, bringing ArtLine visitors through the north part of the RMCAD campus and still connecting with the Residences at Creekside community.
- Update maps and marketing materials to reflect the new segment after it is implemented.

RMCAD Segment Framework Diagram

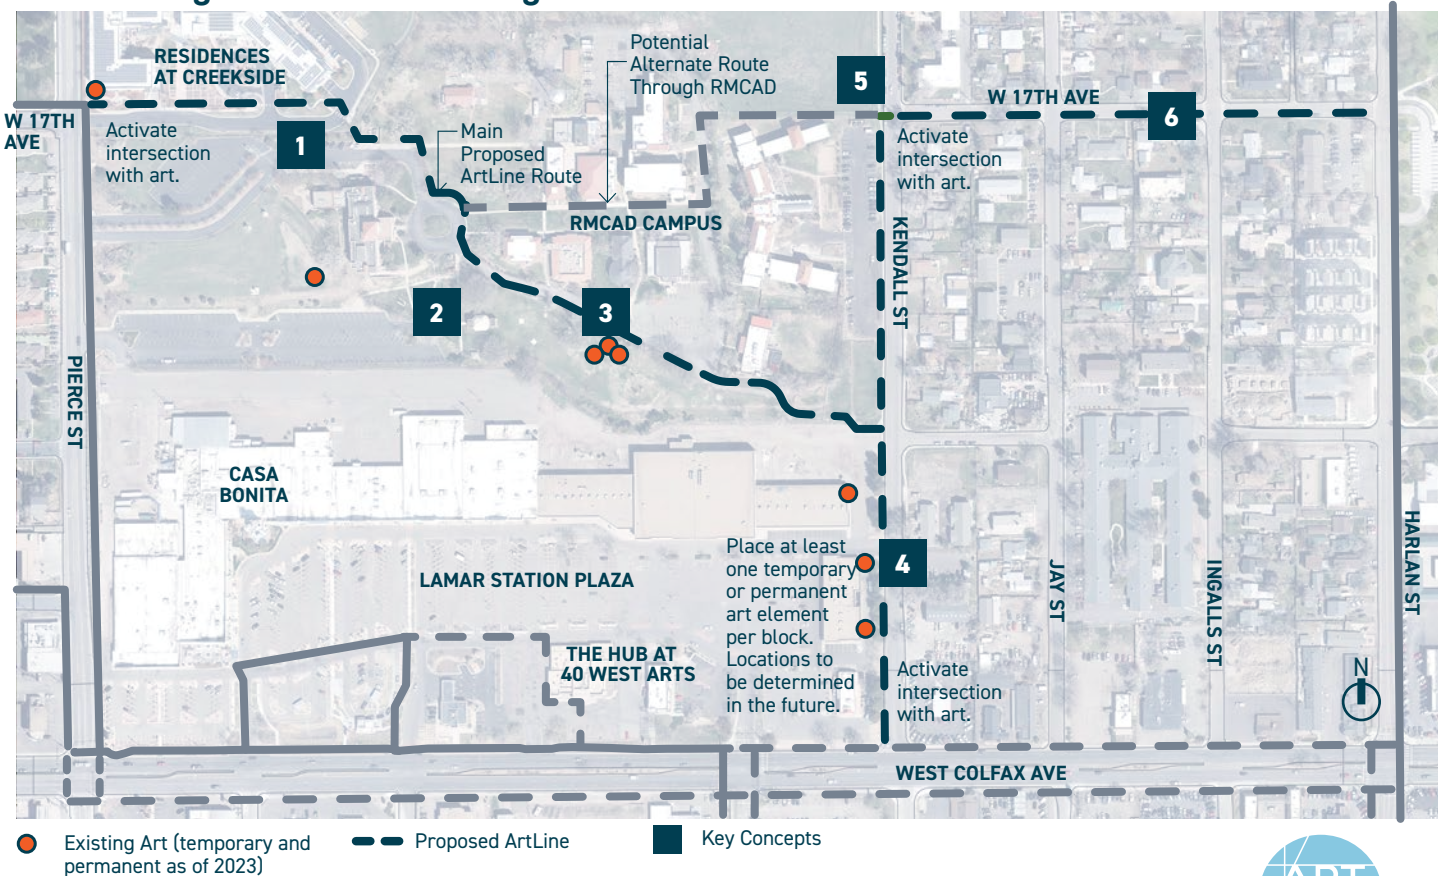

2 Adaptive Reuse of Historic Building and Outdoor Performance Garden

- Explore adaptive reuse of the Isaac Solomon Synagogue building as a gathering and event space.
- Integrate an outdoor performance garden adjacent to this building.
- Additional opportunities to collaborate on programming, for example concerts in the sculpture garden.
- Pursue grants to help implement these recommendations.



3 RMCAD Art and Sculpture Garden

- Integrate the ArtLine with the existing RMCAD Sculpture Garden.
- Explore using interpretive or interactive art elements to tell the unique story and history of the RMCAD campus.
- Collaborate with RMCAD students and faculty to create temporary and/or permanent art installations to elevate their work, integrate it with the ArtLine, and promote emerging student artists.



Examples of opportunities within the RMCAD campus, including a potential outdoor performance amphitheater and an expanded art program in the sculpture garden

4 Kendall Streetscape

- Improve the west side of the Kendall Street streetscape from 17th Avenue to Colfax Avenue with the ArtLine green line, ground murals, wayfinding, and locations for temporary or permanent art installations created in collaboration with RMCAD and potentially ICCS.
- Design Kendall Street as a low-stress bike route when the RMCAD Segment is installed.



Examples of potential small areas along Kendall St for art installations or wayfinding

5 17th Avenue and Kendall Street Intersection

- Improve pedestrian crosswalks in both directions at the 17th Avenue and Kendall Street intersection.
- Align the east-west crosswalk to the south side of 17th Avenue where the new ArtLine route will go and incorporate ArtLine branded crosswalk treatments.
- Utilize the terminus of 17th Avenue as a key location for wayfinding or vertical art pieces to draw visitors down Kendall Street toward the RMCAD segment. Consider the prominent RMCAD water tower when designing any new vertical elements at this location.

6 17th Avenue Streetscape

- Enhance 17th Avenue to include pedestrian-friendly crossings, additional wayfinding, and art nodes at the intersections of Harlan Street and Kendall Street.
- Shorten crossing distances for pedestrians and explore curb extensions in key locations to slow traffic and create space for gateway art pieces.

Concept Diagram of 17th Ave and Kendall St Intersection





ArtLine Design Considerations

- 56 Streetscape Elements
- 58 The Green Line
- 62 Public Art + Creative Placemaking

Streetscape Elements

While the street network along the ArtLine route provides the primary connection for all the segments, the route itself lacks a consistent streetscape character, and in many areas, lacks basic infrastructure including sidewalks, curb and gutter. Streetscape improvements that are consistently designed can strengthen the sense of a continuous route, reinforce the overall identity and brand of the ArtLine, and support a safer and more comfortable experience for all users, encouraging visitors to linger and explore.

Due to the length of the ArtLine and the varying conditions along the route, streetscape improvements are anticipated to be implemented over time with an emphasis on bringing unimproved areas of asphalt up to a basic level of improvement while continuing to complete enhancements along priority corridors or segments.

Recommendations

The categories of streetscape elements included below establish the overall framework and goals for the streetscape along the ArtLine. These recommendations are derived from community input that indicates desire for more landscaping, lighting, and other elements to enhance the user experience. The primary tool in assisting with the implementation of a consistent streetscape is the *ArtLine Design Standards and Guidelines* (DSG), which provides overall design guidance, rules and regulations for all public streets along the route. The DSG, a separate but associated document to the Framework Plan, should be referenced for additional detail and information on these Streetscape Elements.

Trees and Vegetation

- » Establish a consistent streetscape on public streets along all six ArtLine segments that provides continuous shade trees and canopy to reduce urban heat island effect and provides a more comfortable pedestrian experience.
- » Utilize landscape and understory plantings in the tree lawn that emphasizes water conservative planting and includes a variety of seasonal colors and interests while providing habitat and food species for pollinators.
- » Be mindful of plant selection where people might gather and stop.

Pedestrian Lighting & Banners

- » Continue to implement new pedestrian lighting on the segments lacking fixtures to enhance safety, evening comfort, and visibility. Pedestrian lighting is currently installed on parts of Pierce Street, Lamar Street and Mountair Park. Efforts should be made to continue phased implementation along all public streets and paths along the route with a special emphasis on the W Line bike path and major corridors, including West Colfax Avenue, Harlan Street, and Reed Street.
- » Incorporate creative art elements and use of colorful lighting projection technology in some fixtures to further reinforce the creative identity of the ArtLine.
- » Ensure the existing ArtLine Story Totems continue to be well-maintained to provide a lighting element along the route.
- » Selectively add new pedestrian lighting locations with furnishings, like seating and benches, to create safe and comfortable locations for people after dark.
- » Continue to utilize the pedestrian lighting banner program to reinforce the ArtLine identity and make users aware of special events, activities, or seasonal celebrations.

Bike Facilities

- » Continue to improve bike facilities throughout the ArtLine by implementing bicycle lanes on designated routes and utilizing special ArtLine markings, especially at street crossing locations, to let cyclists know they are on a facility that is within the ArtLine and to help indicate the crossings to drivers.
- » As a part of the citywide bicycle plan and recommendations, consider implementing protected bike lanes along corridors that see heavy bicycle traffic based on information tracked in the annual *ArtLine Pedestrian & Bicycle Count Report*.
- » Continue to implement a consistent style of bike racks that reinforce the ArtLine brand and identity and place them strategically in key destination areas to create frequent opportunities for cyclists to park and visit businesses, galleries, and other community amenities.




Streetscape with site furnishing, lighting, and wayfinding banner

Benches and Seating:

- » Continue to utilize and install the custom ArtLine bench along all the ArtLine segments to provide areas for seating, relaxation, and viewing art installations.
- » Additionally, look for opportunities to utilize creative and fun seating styles that relate to the vibrant and diverse nature of the artwork along the ArtLine.
- » Locate some benches and seating near public art to create opportunities for visitors to sit and linger while experiencing the public art.
- » Utilize the destination public spaces identified in the Framework Plan to create larger and more diverse gathering areas with a variety of seating opportunities, including large groupings of café seating, interactive and adaptable seating elements, or seating for larger groups of people.



Add variety of street trees along the street

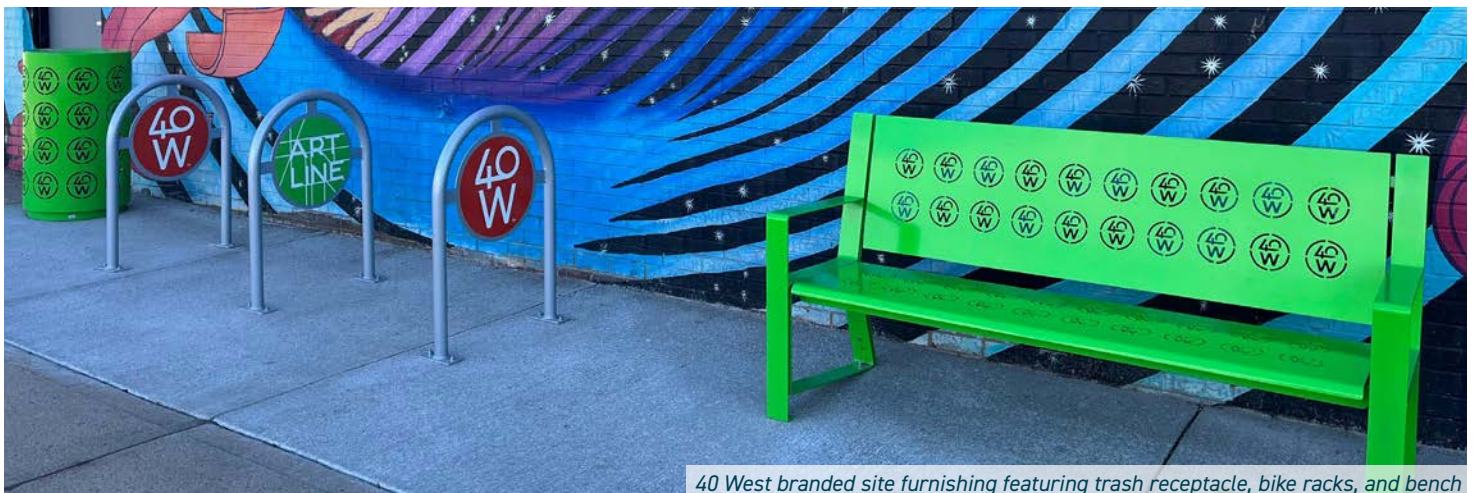

40 West branded site furnishing featuring trash receptacle, bike racks, and bench

The Green Line

The Green Line is the continuous, colorful graphic line marking the ArtLine route along sidewalks, park paths, the W Line bike path and on asphalt streets where no sidewalk exists. The current painted bright green line is a fast and effective way to draw visitors through the ArtLine and brand the concept, but the paint quickly fades and does not adhere well to new concrete. The line was initially painted in 2018 and has been re-painted in full or part three times since the original installation. It was envisioned as a quick-win to mark the route when the ArtLine idea was conceived but was not intended to be the long-term green line marking treatment. The goal has been to design and implement a more aesthetic and longer-lasting treatment.

The recommendations for the ArtLine markings establish a guide for more permanent methods of application that are more sustainable, require lower maintenance, and still create a colorful and recognizable visual element that further brands the ArtLine experience.

Marking Tiers

As part of the Framework Plan, three tiers of markings have been identified to address the varying conditions along the route. The tiers take into consideration the evolving nature of the ArtLine markings and allow for a phased approach to implementation based on opportunities and the physical conditions along the route. Each of the applications will be appropriate in different sections of the ArtLine, all working toward creating a more permanent and less maintenance-intensive Green Line marking method.

The three tiers include the following:



Tier 1: Temporary Markings – Acrylic Paint

Application:

- » To be used only in unimproved or existing areas where the current conditions do not allow for the installation of more permanent methods and there are not any plans for immediate improvements. Examples of this include areas that lack sidewalks where the markings are located on unimproved asphalt, or extremely unimproved sidewalk areas.
- » Average lifespan of this method is typically 1-2 years before repainting is required.

Marking Method:

- » Painted Acrylic:
 - Color: Pantone LT GREEN PMS 361C or equivalent agreed to by the City of Lakewood.
 - Width and location: 8" in width and located in the center of the sidewalk.



Tier 2: Semi-Permanent Markings – Thermoplastic and Methyl Methacrylate (MMA)

Application:

- » A semi-permanent marking that is not too expensive or complicated for projects improving the right-of-way/sidewalk. This method should be used in areas of the ArtLine that have higher quality existing paving conditions and on new development or improvement projects.
- » Average lifespan of this method is typically 5-10 years before reapplication is required.

Marking Methods:

- » Preformed Thermoplastic or MMA:
 - Color: Pantone LT GREEN PMS 361C or equivalent agreed to by the City of Lakewood.
 - Also incorporate 36" diameter ArtLine thermoplastic logo at key decision or entry points or in conjunction with adjacent art or placemaking elements.

Tier 3: Permanent or Enhanced Markings – Integral Color Concrete Band, Inset Metal, Microtop, etc.

Application:

- » Higher quality marking treatment or paving method for specific areas identified in the Framework Plan or where a special condition or location of public art warrants a Tier 3 application.
- » Average lifespan of this method is approximately 8 or more years before reinstallation or major repairs are required.

Marking Methods:

- » Integral Color Concrete Band
 - Color: Davis Color: Willow Green – 5376 or equivalent agreed to by the City of Lakewood.
- » Inset Metal Strip
 - Description: Permanent long-term application of an inset metal strip or band providing a visual reference to the area's rail history.
 - Color and Style: To be determined on a case-by-case basis in collaboration with the City of Lakewood.
- » Microtop
 - Description: Long lasting and durable specialty concrete topper application for use of vibrant colors and patterns.
 - Color and Style: To be determined on a case-by-case basis in collaboration with the City of Lakewood.
- » Thermoplastic Artistic Element on Sidewalk
 - Description: Long lasting and durable application for use of vibrant colors and patterns on specialty artistic elements or sidewalk markings.
 - Color and Style: To be determined on a case-by-case basis in collaboration with the City of Lakewood using artists to create the designs. The ArtLine logo should be considered for incorporation in or near the element to reinforce the branding and connection. The green line should also be creatively incorporated or referenced in the artwork and it should connect to the green line marking on either side of the artwork if possible.




Example of Colored Concrete



Example of Inset Metal Strip



Example of Microtop

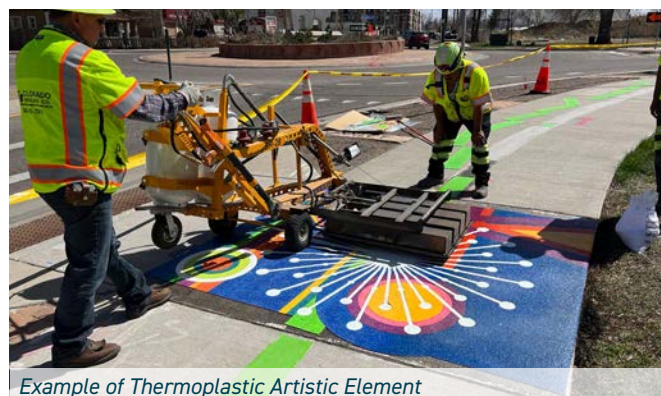


Example of Thermoplastic Artistic Element

ArtLine Marking Recommendations

The ArtLine marking recommendations illustrated here include the use of Tier 2 methods for a majority of the route and Tier 3 along West Colfax Avenue with the Colfax Safety Project improvements. The recommendations do not identify additional locations for Tier 3 Enhanced Markings, as they should be evaluated and determined on a case-by-case basis in partnership with the City of Lakewood and the 40 West Arts District. Additional guidelines include the following:

- » Maintain the ArtLine as the painted green line in any area that does not have adequate existing paving conditions to use other methods and/or clear funding and planning for Tier 2 or 3 implementation.
- » Implement colored concrete along both sides of Colfax Avenue to announce arrival to the ArtLine and to incorporate a long-lasting and low-maintenance green line treatment along this highly visible ArtLine segment.
- » Install a creative marking treatment for the crusher fines ArtLine route in Aviation Park.

ArtLine Marking Recommendations Map

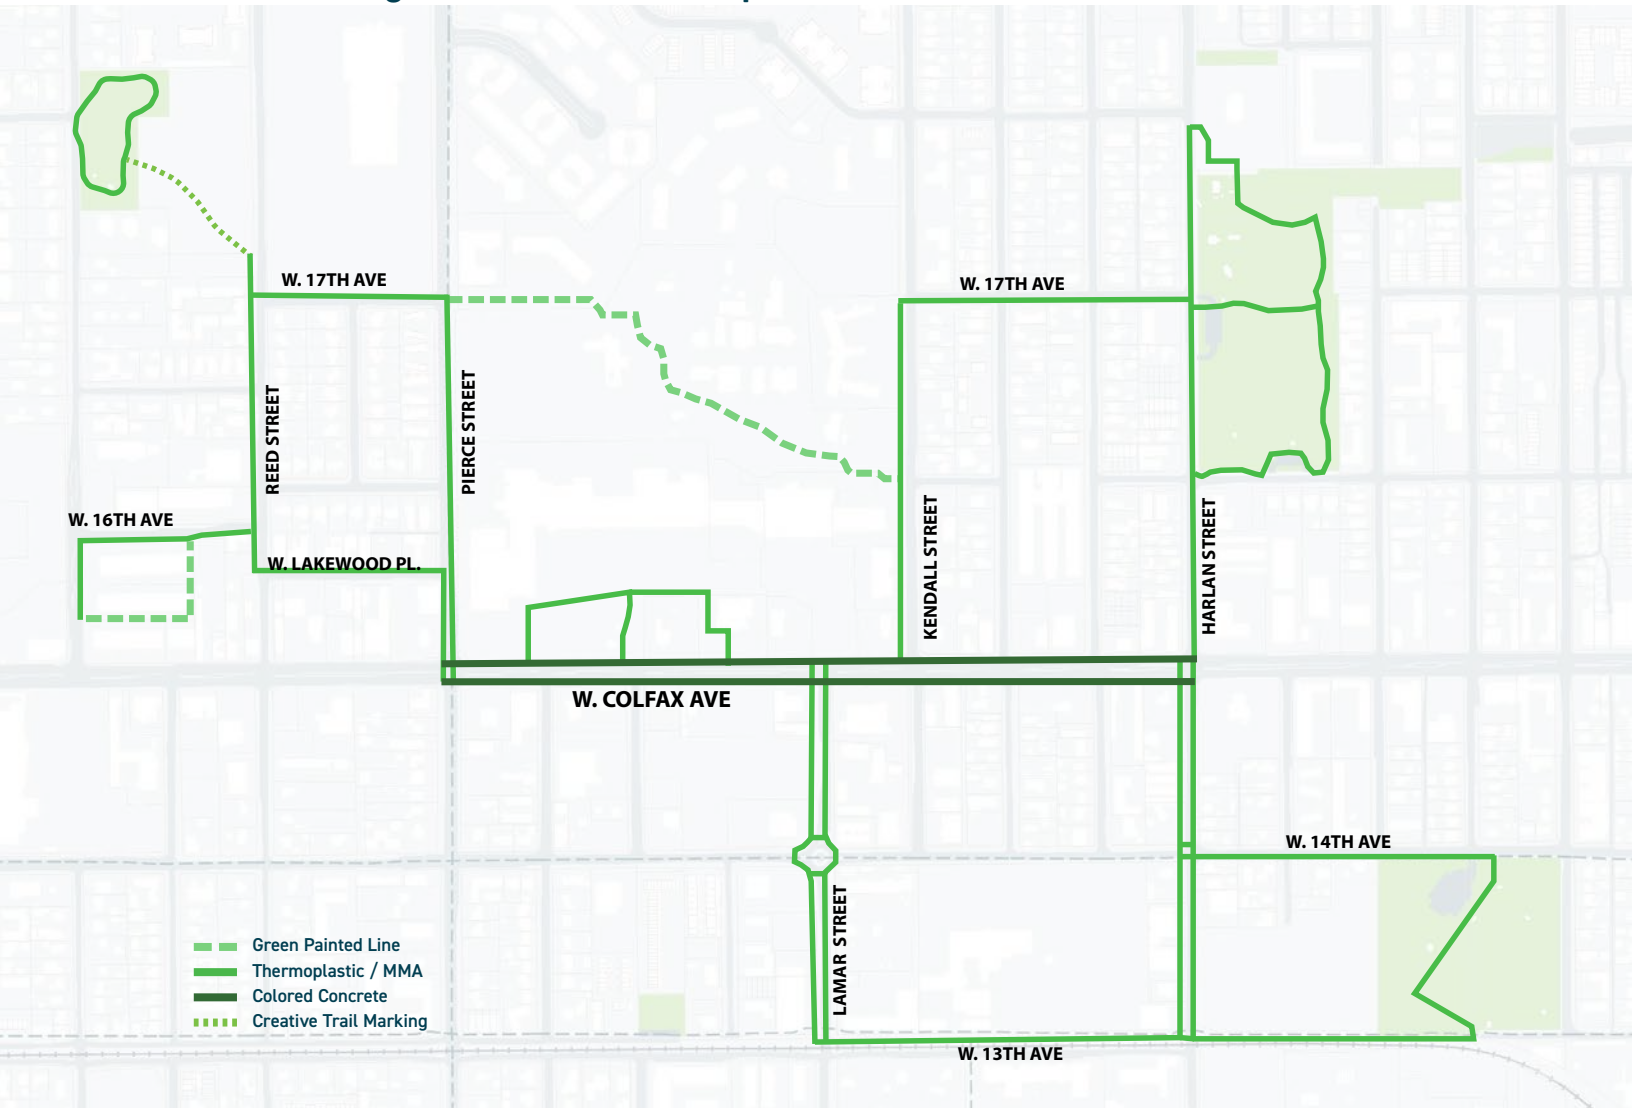

Public Art + Creative Placemaking

Public art and creative placemaking are at the core of the ArtLine's spirit and essential to its long-term vitality. Over 70 permanent and temporary art installations can be discovered along the route and include murals (on vertical and horizontal surfaces), fence art, sculptures, and story totems – a sculptural wayfinding element that is unique to the ArtLine. Many installations incorporate an interactive component, which is a design element that has been important to the community and should be continued with future art installations. Most of the artworks were created by professional or emerging artists, but several mural and fence art installations were completed with artists working alongside community volunteers. This diversity in how art is created, installed, and experienced along the ArtLine is essential to its design and its vision as a community-driven creative placemaking amenity.

The following categories of art are currently located on the ArtLine:

- » **Murals:** art form that involves painting or applying vinyl art wraps onto a surface or wall. Murals can be applied as ground murals, utility art murals, garage murals, wall murals, game murals, or chalk art murals.
- » **Sculptures:** three-dimensional representative or abstract forms, often involving elements that invite the viewer to interact with the piece and involve them in the creative process.
- » **Fence Art:** use of existing fence infrastructure as a canvas for public art expressions.
- » **Kinetic Art:** art from any medium that contains movement perceivable by the viewer or that depends on motion for its effect.
- » **Paving Art:** incorporates art into paving patterns along the streetscape. These can create a sense of place and act as traffic calming measures along vehicular travel and bike travel lanes.
- » **Land Art:** artwork that is composed directly on or in the natural landscape, oftentimes large scale.

Other art forms that should be considered in the future include:

- » **Digital Art:** a temporary or permanent art installation that relies on digital technology as part of the production, process, or presentation. This type of art is becoming increasingly popular.
- » **Performance Art:** a type of artwork involving actions by the artists and relevant collaborators, often including genres like dance, acting, music, and poetry.

Next Steps

Permanent and temporary art can be incorporated on public and private property along the ArtLine with new development or adaptive reuse on private property, public investment and grants, partnerships with public sector and non-profit partners along the route, and through individual businesses or property owners on the ArtLine who are interested in contributing to the experience.

To guarantee the long-term success of these elements on the ArtLine, it will be important to work with all project partners to develop a process to ensure permanent art installations are well-maintained, determine timelines for care and removal of temporary installations, and identify opportunities and selection processes for new installations that contribute to the design and character of the ArtLine. The Implementation section of the Framework Plan outlines next steps to support project partners with these public art and creative placemaking considerations.



ArtLine fence, sculpture and mural art by Lauren Culbreth, Nestor Fedak and DAAS



Pollinator Path ground mural by Charlotte Ricker and volunteers



Davey Jones's Locker by Pirate Contemporary Art



Implementation

66	Implementation Matrix
70	Art Selection Process
72	Organization and Maintenance Considerations
76	Policy and Regulatory Considerations

Introduction

The 40 West ArtLine Framework Plan includes a wide spectrum of ambitious recommendations that are anticipated to be implemented over the next 10-15 years, depending on available resources. Realizing these collective goals and strategies will require collaboration, partnerships, and creative thinking. Implementation will also require substantial resources and sustained support over time including funding for capital improvements, operations, and maintenance. Although these interventions will require a significant financial commitment to be implemented in full, they will provide a multitude of benefits to advancing a wide range of community goals related to quality of life, public health, active transportation, access to parks

and open space, economic development, and more. The following section highlights proposed steps to advance the recommendations in this plan. It's important to note that the ArtLine is envisioned as a dynamic project that will grow and evolve to meet the needs of current community desires. While this plan outlines many recommendations that reflect the community vision for the ArtLine at the time of plan development, like any good creative placemaking project, new ideas to enhance the ArtLine will emerge that are not yet envisioned. These ideas should be vetted by ArtLine project partners and implemented to the extent possible to ensure the ArtLine continues to be reflective of the local community and is an exciting experience for locals and visitors to enjoy.

Implementation Matrix

Aviation Park Segment

Key Concept	Timeframe	Lead Agency	Support Agency	Potential Funding
1. State-Owned Parcel Improvements	long-term (10+ yr)	ArtLine Coordinator/ Project Team	State of Colorado - DOR	State of CO - DOR, Other Grants
2. Activate Aviation Park Art Pedestals	short-term (1-4 yr)	Lakewood HCA	Lakewood Parks, 40W / Colfax BID	City, Other Grants
3. 17th Avenue Sculpture Gardens	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	State of Colorado - DOR	State of CO - DOR, Other Grants
4. Reed Street Utility Art	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	Xcel Energy, Lakewood Public Works, 40W / Colfax BID	Other Grants
5. Reed Street Mobility Improvements	short-term (1-4 yr)	Lakewood Public Works	ArtLine Coordinator/ Project Team	CDBG, City
6. Reed Street and 17th Avenue Intersection Improvements	short-term (1-4 yr)	Lakewood Public Works	State of Colorado - DOR, ArtLine Coordinator/ Project Team	City, CDBG, Other Grants
7. 16th Avenue Streetscape and Creative Business Area	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	40W / Colfax BID, Lakewood Public Works	CDBG, 40W/ Colfax BID, LRA, Other Grants
8. Lakewood Place Mural and Lighting Experience	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	40W / Colfax BID, Lakewood Public Works	CDBG, LRA, Other Grants

See pages 26-28 for details

Colfax Core

Key Concept	Timeframe	Lead Agency	Support Agency	Potential Funding
1. The HUB at 40 West Arts Plaza*	short-term (1-4 yr)	40W / Colfax BID	ArtLine Coordinator/Project Team	40W/ Colfax BID, Other Grants, LRA
2. Art Gateway at Lamar and Colfax	mid-term (5-9 yr)	Lakewood Planning	Lakewood HCA, 40W / Colfax BID, Lakewood Public Works, State of Colorado - CDOT, ArtLine Coordinator/Project Team	State of CO - CDOT, City, LRA, Other Grants
3. Art Along West Colfax Streetscape	mid-term (5-9 yr)	Lakewood Planning	Lakewood HCA, 40W / Colfax BID, Lakewood Public Works, State of Colorado - CDOT, ArtLine Coordinator/Project Team	State of CO - CDOT, City, LRA, Other Grants
4. Improve North-South Crossings Along West Colfax Avenue	mid-term (5-9 yr)	Lakewood Public Works	Lakewood Planning, 40W / Colfax BID, State of Colorado - CDOT, ArtLine Coordinator/Project Team	State of CO - CDOT, Other Grants, City
5. Lamar Station Plaza Creative Hub	long-term (10+ yr)	Lakewood Economic Development	40W / Colfax BID, ArtLine Coordinator/Project Team	Private, LRA, 40W/ Colfax BID

See pages 33-35 for details

* indicates priority project

Lamar Street

Key Concept	Timeframe	Lead Agency	Support Agency	Potential Funding
1. Lamar Street Art Corridor, Street Gallery + Festival Street*	short-term (1-4 yr)	Lakewood Planning	Lakewood Economic Development, 40W / Colfax BID, ArtLine Coordinator/Project Team	Private, LRA, 40W/ Colfax BID, Other Grants
2. Art With Private Development	mid-term (5-9 yr)	Lakewood Planning	Lakewood Economic Development, 40W / Colfax BID, ArtLine Coordinator/Project Team	Private
3. Attractive and Complete Street	long-term (10+ yr)	Lakewood Public Works	Lakewood Planning	CDBG, Private, Other Grants
4. Lamar Street Gateway	mid-term (5-9 yr)	ArtLine Coordinator/Project Team	RTD	City, Other Grants
5. Environmental Art along Lamar Street	long-term (10+ yr)	ArtLine Coordinator/Project Team	Lakewood Public Works, 40W / Colfax BID	Other Grants, 40W/ Colfax BID, LRA

See pages 38-39 for details

* indicates priority project

Mountair Park

Key Concept	Timeframe	Lead Agency	Support Agency	Potential Funding
1. Densify W Line Bike Path Art*	short-term (1-4 yr)	ArtLine Coordinator/ Project Team	RTD, 40W / Colfax BID, Lakewood Planning	Other Grants, 40W/ Colfax BID, Sprout City Farms, LRA
2. Harlan Streetscape Improvements	long-term (10+ yr)	Lakewood Planning	Lakewood Public Works, ArtLine Coordinator/Project Team	Private, City, Other Grants
3. Brickyard Development Art + Community Gathering Spaces	mid-term (5-9 yr)	Lakewood Planning	ArtLine Coordinator/ Project Team	Private, LRA
4. Mountair Park Gateway Moments	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	Lakewood Parks, Lakewood HCA	City, Other Grants, Sprout City Farms

See pages 42-43 for details

* indicates priority project

Walker-Branch Park

Key Concept	Timeframe	Lead Agency	Support Agency	Potential Funding
1. 17th Avenue and Harlan Street Intersection	mid-term (5-9 yr)	Lakewood Public Works	City of Edgewater, Lakewood Planning	City, Other Grants
2. Harlan Streetscape Improvements	mid-term (5-9 yr)	Lakewood Planning	Lakewood Public Works, City of Edgewater	City, Private, City of Edgewater, Other Grants
3. Walker-Branch Park Art	short-term (1-4 yr)	ArtLine Coordinator/ Project Team	City of Edgewater, Lakewood HCA, 40W / Colfax BID	Other Grants, City, City of Edgewater
4. Harlan Street and 18th Avenue Crossing	short-term (1-4 yr)	City of Edgewater	Lakewood Public Works	City of Edgewater, Other Grants
5. Opportunities for Programming, Gathering and Events	short-term (1-4 yr)	ArtLine Coordinator/ Project Team	City of Edgewater, 40W / Colfax BID	City, 40W/ Colfax BID, Other Grants, City of Edgewater
6. Walker-Branch Park Gateway and Wayfinding	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	City of Edgewater, 40W / Colfax BID	City, City of Edgewater, Other Grants

See pages 46-49 for details

RMCAD

Key Concept	Timeframe	Lead Agency	Support Agency	Potential Funding
1. ArtLine Connection Through RMCAD	mid-term (5-9 yr)	ArtLine Coordinator/ Project Team	RMCAD	Other Grants, Private, LRA, RMCAD
2. Adaptive Reuse of Historic Building and Outdoor Performance Garden	long-term (10+ yr)	RMCAD	ArtLine Coordinator/ Project Team, 40W / Colfax BID	Other Grants, RMCAD
3. RMCAD Art and Sculpture Garden	short-term (1-4 yr)	RMCAD	ArtLine Coordinator/ Project Team, 40W / Colfax BID	Other Grants, RMCAD
4. Kendall Streetscape	mid-term (5-9 yr)	Lakewood Planning	Lakewood Public Works	Private, City, LRA, CDBG, Other Grants
5. 17th Avenue and Kendall Street Intersection	mid-term (5-9 yr)	Lakewood Public Works	Lakewood Planning	CDBG, City, Other Grants
6. 17th Avenue Streetscape	mid-term (5-9 yr)	Lakewood Public Works	Lakewood Planning	Private, City, CDBG, Other Grants

See pages 51-53 for details

Acronyms

BID	Business Improvement District
CDBG	Community Development Block Grant
CDOT	Colorado Department of Transportation
DOR	Department of Revenue
HCA	Heritage, Culture & Arts
LRA	Lakewood Reinvestment Authority
MWHS	Metro West Housing Solutions
RMCAD	Rocky Mountain College of Art + Design
SCF	Sprout City Farms and Mountair Park Community Farm
RTD	Regional Transportation District
40W	40 West Arts District

Art Selection Process

Art along the ArtLine may be initiated and funded through public, private, or partner efforts. A key priority for ArtLine partners is ensuring artists are compensated fairly for their work and this should be factored into the process for all art opportunities. The history and people of the region should also be honored and celebrated by highlighting artists and public art installations that elevate the area's unique character. Establishing a transparent and effective art selection process and guidelines will set expectations and help guide project partners and is key to the ArtLine's continued success. The following summarizes the typical ways art may be initiated on the ArtLine and includes recommendations for further development of the process for art selection and approval.

Art Opportunities

1. Permanent Public Art – Privately Funded: Art initiated through private development as a requirement or selected option through the 40 West ArtLine Design Standards & Guidelines and/or Enhanced Development Menu of the Lakewood Zoning Ordinance.
 - Art should be visible from the public realm but located on private property if possible. If art is in the public right-of-way, the developer may request it be considered for donation to the City's public art collection.
2. Permanent Public Art - Publicly Funded: Funded through public investment or grants.
 - Art is located on public property or in an easement.
 - Art becomes part of the City's permanent public art collection.
3. Temporary or Rotating Public Art: Typically funded through public investment or grants.
 - Art is located on public or private property.
 - The goal is to allow for creativity, support local creatives and emerging artists, and contribute to a dynamic and evolving ArtLine experience.
 - The art should be selected through a nimble process that is transparent and efficient.
 - Important to clarify prior to installation the length of time art will be in place, how (or if) art is rotated, and how art will be removed.
4. Other Art –Supporting Community Ownership of the ArtLine
 - "Guerilla" Art, or artwork that appears unannounced outside typical public art-sanctioned processes, has popped up along the ArtLine on private property. These grassroots efforts to be part of the ArtLine should be supported and encouraged.
 - Support partners on the ArtLine like Sprout City Farms, City of Edgewater, Metro West Housing, and others who want to initiate ArtLine art and placemaking efforts by sharing information about art selection processes, on-call artist list, supporting calls for art, etc.

Process Recommendations

Develop an On-Call Artist Pool

- » Consider issuing a Request for Qualifications (RFQ) annually, or at an interval determined with project partners, for a diverse set of artists to be considered as part of an on-call artist pool.
- » Selection of the artists should include representatives from 40 West Arts, 40 West Equity in the Arts Committee, City of Lakewood, and the Lakewood Public Art Committee.

Require Artwork with Development where appropriate and Involve 40 West Arts

- » Create a “tear sheet” for developers and local businesses that clearly outlines the development art selection process.
- » 40 West Arts should explore developing a formal process, that includes an administrative fee for the service, to provide assistance or curation of artists to help with art selection process.
- » Explore requiring a letter of support from 40 West Arts on proposed art installations that are required with development projects.

Encourage Temporary Art Installations

- » Create guidelines for expectations of temporary art based on the timeframe that is expected to last.
 - Guidelines should include requirements around concept review, installation, materials, removal, maintenance, and explicit content at a minimum.
- » Develop a streamlined approval process for temporary art that is expected to last less than 10 years.
- » Consider selecting artists from the on-call artist pool for temporary art installations.
- » Consider developing an “Activate the ArtLine” small grant campaign to encourage properties on the ArtLine to enhance their property with temporary artwork.
 - Consider providing information to show inspiration and examples of what could be done on private property along the route, and a range of costs to understand art budgets.
 - Consider implementing an artist-in-residence program with 40 West Arts to connect with the community and to help support these temporary art initiatives.

Continue adding art that is part of Lakewood’s public art collection

- » Permanent public art along the ArtLine should follow the public art process established by the City of Lakewood.
- » For public art donated to the City of Lakewood to be part of the public art collection, consideration should be given to an additional monetary gift of 5-10% of the public art project budget to cover long-term maintenance.

Organization and Maintenance Considerations

Marketing and Branding

Promoting the 40 West ArtLine and opportunities to explore it and attend events along it are important elements of the project, as is ensuring a consistent brand for the experience. Enhancing the ArtLine experience through wayfinding signage, lighting, and information about the types of art, artist information, and destinations along the route is also important. The ArtLine Audio Tours, which launched in 2021, enhance the ArtLine experience through storytelling and could be expanded upon in the future. Historically, marketing and branding of the ArtLine has occurred informally in a partnership through the City of Lakewood, 40 West Arts, and the BID. The 40 West ArtLine website, www.40WestArtLine.org, was developed by the City of Lakewood and supported by staff from the City and 40 West. However, there is no dedicated staff or formal structure to manage the website or oversee efforts to promote the ArtLine, and this is an identified need to ensure a consistent and compelling public facing presence for the project.

Programming

Working in partnership with the 40 West Arts District and West Colfax BID, programming of the ArtLine is important to activate the route and to bring awareness of this cultural asset to the community and visitors. Programming should be continued and expanded as staffing and resources allow. The following outlines areas for future programming to support and explore.

- » Increase stewardship of the ArtLine through volunteer engagement and considering an ArtLine Ambassador/ Adopt-a-Segment program.
- » Engage with youth and students and consider a mentorship program.
- » Create unique programming in each segment, which could include music and performance art and collaboration with partners along the route.
- » Consider opportunities for organized and themed bike and/or walking tours.

Staffing and Volunteers

The ArtLine currently does not have any dedicated staff nor does it have a clear organizational structure. To date, the ArtLine has successfully relied on a collaborative effort of staff from various City of Lakewood departments, the West Colfax BID, and 40 West Arts District to coordinate and advance efforts for the ArtLine. However, gaps exist in the capacity of staff to support current efforts and to effectively sustain and support the ArtLine to ensure it continues to meet community expectations. With current needs and the additional recommendations outlined in this plan, more dedicated and consistent staff time will be needed to process, coordinate, manage, maintain and oversee these efforts.

Based on current needs and projected growth, to sustain and grow the ArtLine to achieve the vision the community has identified for it, it is recommended to have three (3) staff positions, including one (1) part-time or full-time and two (2) variable part-time based on the following:

1. ArtLine Coordinator (1 full-time or part-time position)- This position would initially be housed within the City of Lakewood, with potential to shift depending on the identified long-term ArtLine organizational structure, and would have the following responsibilities:
 - Work with the City of Lakewood, West Colfax BID, and 40W Arts District to identify a long-term organizational structure for the ArtLine
 - Track, implement, and report out on Framework Plan progress
 - Help secure grants and other funding to support the project
 - Manage all art and placemaking funding, implementation, etc.
 - Coordinate with various departments on ArtLine related implementation needs, including with Design Review Committee on Design Standards & Guidelines
 - Staff ArtLine Project Team (APT) meetings and oversee APT work
 - Oversee work of part-time variable employee(s)
2. ArtLine Maintenance (1 variable part-time)- This position would be housed within the City of Lakewood with the following responsibilities:
 - Oversee maintenance of the ArtLine, including monitoring all art and placemaking elements, performing minor repairs, and coordinating with artists and other contractors on larger repairs and maintenance needs
 - Position could be expanded to support Heritage, Culture and the Arts on public art maintenance needs throughout the City
3. ArtLine Outreach Connector (1 variable part-time)- This position would be located in the community and work out of the 40 West Arts District/West Colfax BID offices with the following responsibilities:
 - Coordinate volunteers
 - Lead marketing and branding efforts, including overseeing the website and audio tours
 - Plan and implement programming, in coordination with the City of Lakewood and other partners
 - Conduct community outreach and engagement with area residents and broader audiences
 - Bi-lingual/Spanish speaking preferred

Maintenance

Long-term sustainability of the ArtLine, artwork and related amenities requires identifying strategies to address maintenance and conservation of ArtLine improvements. The following activities should be considered to ensure the ongoing success and vitality of the ArtLine:

- » Develop a maintenance plan and tracking spreadsheet for art, infrastructure, and gathering spaces along the ArtLine.
- » Conduct a regular condition assessment of all artwork on the ArtLine to determine which pieces need maintenance or conservation, or should be evaluated for deaccessioning (formally removed from the collection).
- » Prioritize conservation needs.
- » Identify and secure funding to provide necessary or recommended treatment.
- » Utilize Adopt-a-Sculpture and/or Adopt-a-Segment, when feasible; with appropriate training in maintenance techniques.
- » Investigate collaborations and partnerships with individuals and community organizations to assist with maintenance and conservation.
- » Include a maintenance plan with artist contracts.
- » Work closely with artists during the design phase to discuss materials and longevity of artwork with an eye on long term maintenance needs and costs.
- » Require a maintenance plan for all privately installed art installations required by the City of Lakewood.

Funding Strategies

Funding the ArtLine, a public community amenity, will require a diverse set of funding streams and strategies. Additionally, the success of the ArtLine to date is thanks to many factors including robust partnerships and a history of success of the partners in securing grants. As the ArtLine looks to the future, it will be imperative to pool resources through partnerships to implement ArtLine elements, support collaborative programming, and cultivate relationships with local groups and stakeholders to encourage a shared sense of pride and ownership of the ArtLine. While not an exhaustive list, the following opportunities and partnerships have been identified as potential ArtLine funding strategies.

Grants: Explore opportunities for national, state, and local grants. The ArtLine was established when project partners received a National Endowment for the Arts Our Town grant to launch the project. There is potential to obtain similar support to support the growth of the ArtLine as a creative recreational and cultural amenity through a variety of grants, including:

- » Safe Streets for All (SS4A)
- » Community Development Block Grants (CDBG)
- » Great Outdoors Colorado (GOCO)
- » Colorado Creative Industries (CCI)
- » National Endowment for the Arts (NEA)
- » SCFD funding (through City of Lakewood and 40 West Arts)
- » America Walks grants
- » AARP Community Challenge grants
- » Community First Foundation
- » Jeffco Open Space funds
- » AmeriCorps VISTA (potential grant program to fund a staff person to help build capacity for the ArtLine)
- » City of Lakewood grants (Neighborhood Participation Program, etc)

Developers and Public Private Partnerships: It will be crucial to set up systems that provide funding through the private sector in addition to federal, regional, and local funding streams. This area of Lakewood is seeing and will likely continue to see new development in the coming years, and sound systems that lay out requirements for working with developers to support the ArtLine and the benefits it brings will be important.

- » Work with and support developers to implement the 40 West ArtLine Design Standards & Guidelines and require public art with new development.
- » Consider a tax, donation, or sponsorship program for new developments that is invested in an ArtLine fund that contributes to art, programming, marketing, and maintenance.

Lakewood Reinvestment Authority (LRA): The LRA works to encourage private reinvestment within targeted areas of Lakewood to remove and prevent blight. The ArtLine is located within an LRA target area, and as such, LRA funds should continue to be invested in the ArtLine to support one of the LRA's primary goals, to maintain a strong identity and image for Lakewood. The funds could support City-initiated efforts, including maintenance, staffing, and new projects, as well as offset costs related to enhanced streetscape and other improvements on the ArtLine with private development.

Local Funding and Leveraging Existing Projects:

Opportunities to support the ArtLine through other local funding and by leveraging existing projects provide promising prospects. In addition to pursuing grants and other funding opportunities, the City's general operating budget should be considered to help support future staff positions as appropriate. The City should also consider requiring public art with all infrastructure projects in the ArtLine area. The following City projects and initiatives should also be leveraged to help implement ArtLine elements:

- » Colfax Safety Project
- » North Dry Gulch Improvements
- » 14th Ave overlay
- » Long-term roadway design plans (Functional Plans)
- » Reed Street sidewalks
- » Walker Branch Park Master Plan
- » Mountair Park Master Plan
- » Future public infrastructure projects

Other Partners: Partnerships have been key to the ArtLine's success and opportunities should be explored to strengthen and build capacity with the following partners to program and deliver projects outlined in this plan and to achieve shared goals.

- » Lakewood-West Colfax Business Improvement District
- » 40 West Arts
- » West Colfax Community Association
- » Metro West Housing Solutions
- » Rocky Mountain College of Art + Design (RMCAD)
- » City of Edgewater
- » Jefferson County Public Libraries (Edgewater branch)
- » Filipino-American Community Center of Colorado
- » Sprout City Farms and Mountair Park Community Farm
- » State of Colorado (Department of Revenue and Department of Transportation)
- » Regional Transportation District (RTD)
- » Private partners (e.g. Lamar Station Plaza and other local businesses)

Policy and Regulatory Considerations

ArtLine Route

The 40 West ArtLine Framework Plan provides guidance based on community input for improvements along the existing ArtLine route and recommends route additions in several areas to enhance the ArtLine experience as resources become available. While alternative route modifications or extensions could be proposed by project partners or others in the future, the priority should be to first implement the recommended route identified in the plan. Other areas that have been suggested for potential future ArtLine extensions include Sheridan Station and Wadsworth Station on the W Line Light Rail, the Edgewater Public Market area, and Sloan's Lake. Any proposed changes to the route recommended in the plan will be required to be evaluated and approved by the City of Lakewood and 40 West Arts prior to modifying the ArtLine Route.

ArtLine Brand Use

The 40 West ArtLine is a free and publicly accessible amenity and experience. To avoid any potential confusion and to maintain the integrity of the ArtLine brand, private development along or adjacent to the ArtLine route is discouraged from using the ArtLine name or logo in the name of the development. Developments are encouraged to have a unique and creative name to tie to the experience of being part of the ArtLine. Developments may propose to use a tagline to market the project as being "on the 40 West ArtLine". However, this proposed use of the ArtLine name or brand must be reviewed and granted permission by the City of Lakewood and 40 West Arts prior to being implemented.

Design Standards and Guidelines

The *40 West ArtLine Design Standards and Guidelines* is a companion document to the 40 West ArtLine Framework Plan and provides guidance around public realm and private development improvements along the ArtLine. The purpose of this document is to provide clear and consistent design direction with the goal of creating a creative, artistic, enlivening, economically healthy and thriving community-oriented district. The guidelines are administered by the City-Council appointed Lakewood Design Review Commission and support the 40 West ArtLine Framework Plan by providing more technical guidance around specific design elements to ensure a cohesive and attractive ArtLine streetscape and design along the entire route.

Future Zoning and Regulatory Tools

The ability to adjust zoning provides an opportunity to incentivize and balance land uses that are incompatible with the ArtLine. This powerful regulatory tool can support the ArtLine's overall vision.

Project partners should consider future zoning changes to:

- » Discourage or prohibit new predominantly auto-oriented uses directly on the ArtLine route, for example surface parking lots, gas stations, and car washes.
- » Encourage and incentivize neighborhood-serving local businesses. Incentives could include parking reductions and flexibility with adaptive reuse (both zoning and building code changes).
- » Allow for and encourage a range of housing options to include mixed income, live-work, and affordable housing options to encourage and incentivize a diverse set of residents.
- » Support artistic land uses like galleries, workshops, live-work spaces, and studios that contribute to the creative economy and create a unique sense of place within the 40 West Arts District.
- » Explore options to create an overlay district in alignment with the design standards and guidelines to promote ArtLine-oriented development and creative incentives. Ideas to consider include:
 - Potential for incentives for parking reductions in exchange for increased publicly accessible plaza space.
 - Potential changes to the minimum required retail-depth to keep the intent of activated, pedestrian-oriented ground floor design while allowing for flexibility so use can change over time with the economy and space needs.





STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 8

To: Mayor and City Council
From: Jay Robb, City Clerk, 303-987-7081
Subject: **APPOINTMENT TO THE BUDGET AND AUDIT BOARD**

SUMMARY STATEMENT: Resolution 2024-11 appoints a member to the Budget and Audit Board.

BACKGROUND INFORMATION: The Screening Committee held interviews on January 30, 2024, and February 7, 2024, and recommended the appointment of Barbara “Bobbie” Wolfe to the Budget and Audit Board.

Adoption of this resolution will officially appoint Bobbie Wolfe to the Budget and Audit Board, to serve a three-year term, which began on January 1, 2024, and will end on December 31, 2026.

BUDGETARY IMPACTS: None.

STAFF RECOMMENDATIONS: Staff is recommending the adoption of Resolution 2024-11.

ALTERNATIVES: The Screening Committee could interview additional candidates to serve on the Board.

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS: If the Resolution is adopted, the new member would begin orientation with the staff liaison.

ATTACHMENTS: Resolution 2024-11

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

2024-11

A RESOLUTION

APPOINTING A MEMBER TO THE BUDGET AND AUDIT BOARD

BE IT RESOLVED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. Barbara “Bobbie” Wolfe, a Lakewood resident, is hereby appointed to the Budget and Audit Board to serve a three-year term that commenced on January 1, 2024 and will end December 31, 2026.

INTRODUCED, READ, AND ADOPTED by a vote of ____ for and ____ against at a hybrid regular meeting of the Lakewood City Council on February 26, 2024, at 7 o'clock p.m. at the Lakewood Civic Center, 480 S. Allison Parkway, Lakewood, Colorado.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

Approved as to form:

Alison McKenney Brown, City Attorney

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 9

To: Mayor and City Council
From: Jay Robb, City Clerk, 303-987-7081
Subject: **APPOINTMENT TO THE BOARD OF APPEALS**

SUMMARY STATEMENT: Resolution 2024-12 appoints a member to the Board of Appeals.

BACKGROUND INFORMATION: The Screening Committee held interviews on February 7, 2024, and recommended the appointment of Jason Summer to the Board of Appeals.

Adoption of this resolution will officially appoint Jason Summer to the Board of Appeals, to serve a partial term, which began April 1, 2023, and will end on March 31, 2025.

BUDGETARY IMPACTS: None.

STAFF RECOMMENDATIONS: Staff is recommending the adoption of Resolution 2024-12.

ALTERNATIVES: The Screening Committee could interview additional candidates to serve on the Board.

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS: If the Resolution is adopted, the new member would begin orientation with the staff liaison.

ATTACHMENTS: Resolution 2024-12

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

2024-12

A RESOLUTION

APPOINTING A MEMBER TO THE BOARD OF APPEALS

BE IT RESOLVED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. Jason Summer, a Lakewood resident, is hereby appointed to the Board of Appeals to serve a partial term that commenced on April 1, 2023 and will end March 31, 2026.

INTRODUCED, READ, AND ADOPTED by a vote of ____ for and ____ against at a hybrid regular meeting of the Lakewood City Council on February 26, 2024, at 7 o'clock p.m. at the Lakewood Civic Center, 480 S. Allison Parkway, Lakewood, Colorado.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

Approved as to form:

Alison McKenney Brown, City Attorney

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 10

To: Mayor and City Council
From: Jay Robb, City Clerk, 303-987-7081
Subject: **REAPPOINTING MEMBERS TO THE LAKEWOOD ADVISORY COMMISSION**

SUMMARY STATEMENT: The Resolution reappoints two members to the Lakewood Advisory Commission for full, three-year terms.

BACKGROUND INFORMATION: The Screening Committee held interviews on February 7, 2024, and recommended the reappointment of two individuals to the Lakewood Advisory Commission.

Adoption of the Resolution will officially reappoint Rena Fowler and Sarah Griffin to the Lakewood Advisory Commission, to serve full, three-year terms which began on January 1, 2024 and will end on December 31, 2026.

BUDGETARY IMPACTS: None.

STAFF RECOMMENDATIONS: Staff is recommending the adoption of Resolution 2024-13.

ALTERNATIVES: The City Council could vote against one or both reappointments.

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS: If the Resolution is adopted, the members will continue their service on the Lakewood Advisory Commission.

ATTACHMENTS: Resolution 2024-13

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

2023-13

A RESOLUTION

REAPPOINTING MEMBERS TO THE LAKEWOOD ADVISORY COMMISSION

BE IT RESOLVED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. The following persons are hereby reappointed to the Lakewood Advisory Commission for a three-year term which commenced on January 1, 2024, and will end on December 31, 2026:

Rena Fowler, a Lakewood resident

Sarah Griffin, a Lakewood resident

INTRODUCED, READ, AND ADOPTED by a vote of ____ for and ____ against at a hybrid regular meeting of the Lakewood City Council on February 26, 2024, at 7 o'clock p.m. at the Lakewood Civic Center, 480 S. Allison Parkway, Lakewood, Colorado.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

Approved as to form:

Alison McKenney Brown, City Attorney

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 12

To: Mayor and City Council
From: Max Kirschbaum, Public Works Director
Subject: **STR HEALTH AND SAFETY REQUIREMENTS**

SUMMARY STATEMENT: This proposed amendment to the Short Term Rental Code broadens the definition of “Inspector” as currently set forth in LMC 5.55.010(J) to include additional nationally recognized home inspection and certification organizations and brings the minimum health and safety requirements in the LMC 5.55.050(C) into alignment with the International Residential Code (IRC) which has been adopted by reference at LMC 14.09.

BACKGROUND INFORMATION: In 2023, the Lakewood City Council adopted Ordinance O-2023-5, codified as LMC Chapter 5.55, which provides for the licensing and regulation of STRs. To ensure the safety of all STR renters, City Council adopted a provision requiring professional inspections of all residences that were subject to STR license applications. Accordingly, Ordinance O-2023-5 included a definition of “Inspector” which requires such inspections be completed by appropriately certified organizations. However, LMC 5.55.010(J) defines “Inspector” to only allow inspections by ASHI, a nationally recognized home inspection and certification organization. InterNACHI is a second nationally recognized home inspection and certification organization that is currently not allowed to perform STR inspections based on the definition of “Inspector.” This proposed code amendment includes InterNACHI in the definition of “Inspector” and allows the City Clerk’s Office to accept inspections from other similarly certified inspection organizations. The time required for homeowners to meet the requirements of this Code is anticipated to be reduced by the inclusion of additional certified inspectors.

Additionally, LMC 5.55.050(C) defines the minimum health and safety requirements for STRs, and requires STRs to have carbon monoxide detectors in each room used for sleeping purposes and smoke detectors on each floor of the STR. However, section R314.3 of the IRC requires smoke detectors in all rooms used for sleeping and section R315.3 of the IRC requires carbon monoxide detectors outside of each separate sleeping area. The second proposed code amendment harmonizes LMC 5.55.050(C) with the IRC.

BUDGETARY IMPACTS: None.

STAFF RECOMMENDATIONS: Staff recommend adoption of the proposed amendments.

ALTERNATIVES: The City Council could decline to amend the code, which would leave ASHI as the only approved STR inspection organization in the City and would leave LMC 5.55.050(C) out of alignment with the IRC.

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS: The City Council shall vote on the proposed amendments upon second reading, after sufficient public notice is given.

ATTACHMENTS: Ordinance O-2024-5

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

O-2024-5

AN ORDINANCE

AMENDING TITLE 5 CHAPTER 55, SECTIONS 5.55.010 AND 5.55.050 OF THE LAKEWOOD MUNICIPAL CODE REGARDING INSPECTORS AND MINIMUM HEALTH AND SAFETY REQUIREMENTS

WHEREAS, the City of Lakewood, Colorado, the “City”, is a home rule municipality, organized and existing under Article XX, Section 6 of the Colorado Constitution;

WHEREAS, on February 13, 2023, the Lakewood City Council adopted Ordinance O-2023-5 to allow for the licensing and regulation of short-term rentals (STR/STRs) within the City, as codified in Title 5, Chapter 55 of the Lakewood Municipal Code (LMC);

WHEREAS, during the implementation and enforcement of Ordinance O-2023-5, staff has discovered two areas in need of immediate correction/cleanup to be in compliance with federal and local laws;

WHEREAS, this City Council will receive a look-back on the STR Ordinance as a whole in June 2024, at which time staff may propose more robust changes to LMC Chapter 5.55 in addition to the minor corrective/cleanup changes presented herein;

WHEREAS, the definition of “Inspector” in LMC section 5.55.010(J) only allows for ASHI, a nationally recognized home inspection and certification organization, to complete STR inspections;

WHEREAS, InterNACHI is also a nationally recognized home inspection and certification organization with qualifications that mirror ASHI;

WHEREAS, there is and was no intent to promote one nationally recognized home inspection and certification organization over any other;

WHEREAS, LMC section 5.55.050(C) defines the minimum health and safety requirements for STRs in the City and, in part, currently requires all STRs to have carbon monoxide detectors in all rooms used for sleeping and smoke detectors on each floor;

WHEREAS, section R314.3 of the 2021 International Residential Code requires smoke detectors in all rooms used for sleeping and section R315.3 of the 2021 International Residential Code requires carbon monoxide detectors outside of each separate sleeping area;

WHEREAS, it is the intent of the City to harmonize the STR minimum safety standards with the requirements of the 2021 International Building Code, which has been adopted by reference in LMC Chapter 14.09;

WHEREAS, approval of this ordinance on first reading is intended only to confirm that the City Council desires to comply with the Lakewood Municipal Code by setting a

public hearing to provide City Staff and the public an opportunity to present evidence and testimony regarding the proposal; and

WHEREAS, approval of this ordinance on first reading does not constitute a representation that the City Council, or any member of the City Council, supports, approves, rejects, or denies the proposal.

NOW, THEREFORE, BE IT ORDAINED by the City Council of the City of Lakewood, Colorado, that:

SECTION 1. Amendment of Title 5, Chapter 55. Title 5, Chapter 55 of the Lakewood Municipal Code shall be amended as follows:

5.55.010 - Definitions.

As used in this Chapter, the following terms shall have the meanings ascribed thereto. Any word or term not defined hereinafter shall be defined in accordance with Chapter 17 of the Lakewood Municipal Code.

J. *Inspector* means an ASHI, InterNACHI or other Certified Master Inspector from a nationally recognized certifying body, certified professional residential property inspector or a residential property inspection company member of ASHI, InterNACHI or other Certified Master Inspector with any nationally recognized home inspection certifying body.

5.55.050 - Property Safety Inspection; Investigation.

C. *Minimum Health and Safety Requirements.* All STRS shall contain the following: a minimum of one operable fire extinguisher per floor (or more if deemed necessary during the premises inspection); operable smoke detectors in each sleeping room, outside each separate sleeping area in the immediate vicinity of the bedrooms, and as otherwise required by section R314.3 of the 2021 International Residential Code; and operable carbon monoxide detectors outside of each separate sleeping area in the immediate vicinity of bedrooms and as otherwise required by section R315.3 of the 2021 International Residential Code. An STR with living or sleeping areas within a basement area shall be equipped with egress windows or other exit systems. Please note: this Code only mandates minimum health and safety requirements. Property owners who utilize their home as an STR are solely responsible for compliance with all applicable property maintenance laws.

SECTION 2. This ordinance shall take effect thirty (30) days after final publication.

SECTION 3. If any provision of this Ordinance should be found by a court of competent jurisdiction to be invalid, such invalidity shall not affect the remaining portions or applications of this Ordinance that can be given effect without the invalid portion, provided

that such remaining portions or application of this Ordinance are not determined by the court to be inoperable.

I hereby attest and certify that the within and foregoing ordinance was introduced and read on first reading at a hybrid regular meeting of the Lakewood City Council on the 12th day of February 2024; published by title in the Denver Post and in full on the City of Lakewood's website, www.lakewood.org, on the 15th day of February 2024; set for public hearing to be held on the 26th day of February 2024, read, finally passed and adopted by the City Council on the 26th day of February 2024, and, signed by the Mayor on the ____ day of February 2024.

Wendi Strom, Mayor

ATTEST:

Jay Robb, City Clerk

APPROVED AS TO FORM:

Alison McKenney Brown, City Attorney

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. 13

To: Mayor and City Council

From:

Subject:

SUMMARY STATEMENT:

BACKGROUND INFORMATION:

BUDGETARY IMPACTS:

STAFF RECOMMENDATIONS:

ALTERNATIVES:

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS:

ATTACHMENTS: None

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney

STAFF MEMO

DATE OF MEETING: FEBRUARY 26, 2024 / AGENDA ITEM NO. A.

To: Mayor and City Council
From: Jay Robb, City Clerk, 303-987-7081
Subject: **REQUEST FOR SPECIAL MEETINGS**

SUMMARY STATEMENT: City staff is requesting two Special Meetings for the purpose of the City Council to conduct annual reviews for the City Manager and City Attorney.

Both the City Manager and City Attorney are hired by the City Council. Specifically, Article III, Section 3.5, of the Lakewood Home Rule Charter requires that "The job performance of the City Manager shall be evaluated annually by the City Council. The City Council shall review such evaluation with the City Manager."

Additionally, Article IV, Section 4.6 of the Lakewood Municipal Code states that "the City Council shall appoint a City Attorney who, at the time of appointment, shall be licensed to practice law in Colorado. The City Attorney shall serve at the pleasure of the City Council and at a compensation fixed by the City Council."

The dates being requested for these annual reviews are as follows:

6:00PM, MARCH 25 - SPECIAL MEETING

Annual Review of the City Manager

6:00PM, APRIL 8 - SPECIAL MEETING

Annual Review of the City Attorney

BACKGROUND INFORMATION: A "Special Meeting" of the City Council is a meeting held at other than the designated dates and times of a Regular Council meeting. Policy 05.5 of the Council Policies and Procedures Manual provides that: "a Special Meeting may be scheduled either by majority vote of the City Council at a Regular Meeting or by "Notice of Special Meeting" signed by the Mayor and three Council members and delivered to all Council members at least 24 hours in advance of the Special Meeting.

BUDGETARY IMPACTS: None.

STAFF RECOMMENDATIONS: Approve the request for two special meetings for the Council to conduct the annual reviews of the City Attorney and City Manager.

ALTERNATIVES: Staff can route a notice of special meeting signed by the Mayor and three Council members to schedule the Special Meetings.

PUBLIC OUTREACH: This item has been promoted through the regular communication channels to be considered by the Lakewood City Council.

NEXT STEPS: If approved, staff will proceed with scheduling the Special Meetings on March 25th and April 8th.

ATTACHMENTS: DRAFT 2024 CITY COUNCIL SPECIAL MEETING MINUTES 01 08
DRAFT 2024 CITY COUNCIL SPECIAL MEETING MINUTES 01 22
DRAFT 2024 CITY COUNCIL SPECIAL MEETING MINUTES 02 05

REVIEWED BY: Kathleen E. Hodgson, City Manager
Benjamin B. Goldstein, Deputy City Manager
Alison McKenney Brown, City Attorney



**MINUTES
SPECIAL MEETING OF THE CITY COUNCIL
CITY OF LAKEWOOD**

6:00 P.M.

January 8, 2024

Minutes are not a verbatim transcription, but rather an attempt to capture the intent of the speaker by the City Clerk.

ITEM 1 – CALL TO ORDER

Mayor Strom called the in-person Special Meeting to order at 6:00 pm.

ITEM 2 – ROLL CALL

Those present were: Mayor Wendi Strom, Presiding
Sophia Mayott-Guerrero
Dave Rein
Rebekah Stewart
Jacob LaBure
Jeslin Shahrezaei
Roger Low
Isabel Cruz
Glenda Sinks

Absent: Richard Olver

Staff: Alison McKenney Brown, City Attorney
Jay Robb, City Clerk

Full and timely notice of this City Council meeting had been given and a quorum was present.

ITEM 3 – STATEMENT OF CONFLICT OF INTEREST

Mayor Strom read the Statement of Conflict of Interest.

ITEM 4 – EXECUTIVE SESSION

Mayor Pro Tem Shahrezaei made a motion to hold an executive session of the Lakewood City Council for the purposes of discussion of personnel matters under C.R.S. Section 24-6-402(4)(e)(1) and (f)(i) and Section 2.15(c)(2) and (c)(8) of the Lakewood Home Rule Charter, specifically discussions with candidates for the position of Liquor Licensing Authority and potentially instructing staff regarding contract negotiation matters associated therewith.

The motion was seconded.

Vote on Motion:

AYE: Strom, Mayott-Guerrero, Stewart, Rein, LaBure, Shahrezaei, Low, Cruz, Sinks.

NAY: None.

Result:

Approved 9-0, the motion passed.

At 6:03 p.m. the Council went into executive session.

At 6:36 p.m. Mayor Strom adjourned the executive session and returned to the Special Meeting.

ITEM 5 – ANY FURTHER BUSINESS OF THE BODY ARISING OUT OF THE EXECUTIVE SESSION

The Council agreed by unanimous consent to direct staff to draft an ordinance for their consideration recommending Kristin N. Brown for the appointment of the Lakewood Liquor Licensing Authority.

ITEM 6 – ADJOURNMENT

At 6:38 p.m. Mayor Strom adjourned the Special Meeting.

Submitted by:

Jay Robb, City Clerk



**MINUTES
SPECIAL MEETING OF THE CITY COUNCIL
CITY OF LAKEWOOD**

5:30 P.M.

January 22, 2024

Minutes are not a verbatim transcription, but rather an attempt to capture the intent of the speaker by the City Clerk.

ITEM 1 – CALL TO ORDER

Mayor Stom called the in-person Special Meeting to order at 5:31pm.

ITEM 2 – ROLL CALL

Those present were: Mayor Wendi Strom, Presiding
Richard Oliver
Sophia Mayott-Guerrero
Dave Rein
Rebekah Stewart
Jacob LaBure
Jeslin Shahrezaei
Roger Low
Isabel Cruz
Glenda Sinks

Absent: None

Staff: Kathy Hodgson, City Manager
Alison McKenney Brown, City Attorney
Jay Robb, City Clerk

Full and timely notice of this City Council meeting had been given, and a quorum was present.

ITEM 3 - STATEMENT OF CONFLICT OF INTEREST

Mayor Strom read the Statement of Conflict of Interest.

ITEM 4 – EXECUTIVE SESSION

Mayor Pro Tem Shahrezaei made a motion to hold an executive session pursuant to C.R.S. Section 24-6-402(4)(B) And Lakewood Municipal Charter 2.15(c)(4) to move into executive session for the purpose of receiving legal advice regarding potential liability and legal concerns arising out of property adjacent to Belmar Park including the 777 S. Yarrow Street proposed development.

The motion was seconded.

Vote on Motion:

AYE: Strom; Guerrero; Stewart; Rein; Shahrezaei; LaBure; Low; Cruz: Sinks

NAY: Olver.

ABSENT: None.

Result:

Approved 9-1, the motion passed.

At 5:33 p.m. the Council went into executive session.

ITEM 5 – ANY FURTHER BUSINESS OF THE BODY ARISING OUT OF THE EXECUTIVE SESSION

At 7:06 p.m. Mayor Strom adjourned the executive session and returned to the Special Meeting.

ITEM 6 – ADJOURNMENT

At 7:07 p.m. Mayor Strom adjourned the Special Meeting.

Submitted by:

Jay Robb, City Clerk



**MINUTES
SPECIAL MEETING OF THE CITY COUNCIL
CITY OF LAKEWOOD**

6:00 P.M.

February 5, 2024

Minutes are not a verbatim transcription, but rather an attempt to capture the intent of the speaker by the City Clerk.

ITEM 1 – CALL TO ORDER

[View video recording here](#)

Mayor Stom called the virtual Special Meeting to order at 6:09 pm.

ITEM 2 – ROLL CALL

[View video recording here](#)

Those present were: Mayor Wendi Strom, Presiding
Richard Olver
Sophia Mayott-Guerrero
Dave Rein
Rebekah Stewart
Jacob LaBure
Jeslin Shahrezaei
Roger Low
Isabel Cruz
Glenda Sinks

Absent: None

Staff: Kathy Hodgson, City Manager
Alison McKenney Brown, City Attorney
Jay Robb, City Clerk

Full and timely notice of this City Council meeting had been given, and a quorum was present.

ITEM 3 - STATEMENT OF CONFLICT OF INTEREST

[View video recording here](#)

Mayor Wendy Strom read the statement of conflict of interest.

ITEM 4 – EXECUTIVE SESSION

[View video recording here](#)

Mayor Pro Tem Shahrezaei made a motion to hold an executive session pursuant to C.R.S. Section 24-6-402(4)(b) and Lakewood Municipal Charter 2.15(c)(4) to move into executive session for the purpose of receiving legal advice on specific legal matters focusing upon matters subject to negotiation under C.R.S. Section 24-6-402(4)(e) and Lakewood Municipal Charter 2.15(c)(4), more specifically matters arising out of a Community Development Block Grant (CDBG) memorandum of understanding by and between the City of Lakewood and the U.S. Department of Housing and Urban Development and a federal grant awarded to the City by the Office of Head Start.

The motion was seconded.

Vote on Motion:

AYE: Strom; Guerrero; Stewart; Rein; Shahrezaei; LaBure; Low; Cruz: Sinks

NAY: Olver.

ABSENT: None.

Result:

Approved 9-1, the motion passed.

At 6:12 p.m. the Council went into executive session.

ITEM 5 – ANY FURTHER BUSINESS OF THE BODY ARISING OUT OF THE EXECUTIVE SESSION

At 7:12 p.m. Mayor Strom adjourned the executive session and returned to the Special Meeting.

ITEM 6 – ADJOURNMENT

At 7:14 p.m. Mayor Strom adjourned the Special Meeting.

Submitted by:

Jay Robb, City Clerk